




Insulating materials	Low Voltage	Cabins and cabinets
----------------------	-------------	---------------------

Code: **ISOLPLAST 353/05**

Insulating cover for temporary protection against accidental contact at energized LV installations up to 1000 V

Flexible, transparent, thickness 0.5 mm, acid and oil resistant, self-extinguishing and flame resistant.

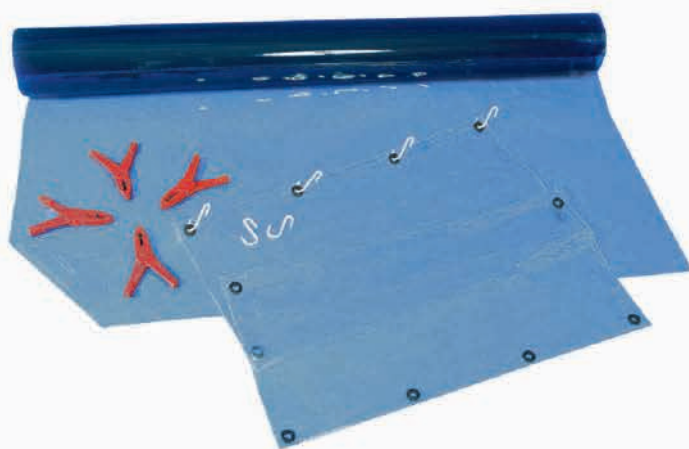

In compliance with	IEC 61112
	ENEL EA0337

Category	M
Class	0
Thickness	0.5 mm
Tensile test	19.1 MPa
Max absorbed current	0.4 mA
Voltage test	5 kV
Withstand test	10 kV
Max operative voltage	1 kV

Alternative versions	
ISOL353/0,5-R25M	Roll width 1,4 m, length 25 m
ISOL353T/0,5	Cover size 800x1000 mm (different sizes on demand)
ISOL353TELO/0,5	With plastic button-holes size 800x1000 mm with 2 "S" shape hook
ISOL353VLC/0,5	Cover with Velcro, size 800x1000 mm (different sizes on demand)

Accessories



PI/96	GA/S
Insulating spring clamp in plastic material for hanging covers, beaks opening 45 mm	"S" shape insulating hook for hanging covers with button-holes