

RG-RAP1200(F)

AC1300 DUAL BAND WALL-PLATE
ACCESS POINT

Product Overview

Ruijie Reyee Series RG-RAP1200(F) dual-band FE wall plate AP is a high-performance wall plate AP. With 802.3af/at PoE support, the AP provides a LAN port at the front to facilitate the expansion of IPTV, IP phone, etc. Compliant with 802.11a/b/g/n/ac Wave1/Wave2 Wi-Fi protocol, the AP supports MU-MIMO dual-stream technology and offers built-in omnidirectional antennas. It can operate concurrently at 2.4GHz and 5GHz, providing high-speed wireless access of 400Mbps at 2.4GHz, 867Mbps at 5GHz and up to 1267Mbps per AP. Its compact 86mm wall plate installation design facilitates quick installation directly into a standard 86mm wall junction box, which is an ideal choice for deployment such as offices, commercial industry, hotels, service scenarios, etc.

The AP supports Ruijie's self-organizing network feature, which means to realizes auto-discovery, auto-networking and auto-configuration between routers, switches, and wireless APs without the need for controllers or Internet access. With the Ruijie Cloud app, users can quickly complete the device deployment and configuration, remote management, operation and maintenance of the entire network, which greatly reduces the investment of equipment cost, labor cost and time cost in the process of wireless network construction.

Highlights

- **802.11ac Wave2 technology**
- **Auto-provisioning via Self-Organizing Network:** Supports Ruijie's self-developed smart networking feature, which breaks through the product limitations and realizes auto-discovery, auto-networking and auto-configuration between gateways, switches, and wireless APs without the need for controllers or Internet access
- **Lifetime free Ruijie Cloud management:** Remote fault alarm, one-click optimizing and maintenance on Ruijie Cloud App
- **Seamless layer 3 roaming**
- **Industrial Design:** Robust casing, Provide better strength and safety for products

Product Features

High-speed dual-band Wi-Fi

The device supports 2.4GHz and 5GHz dual-band communication, providing access rate of 400Mbps at 2.4GHz, 867Mbps at 5GHz and up to 1267Mbps per AP. It can provide 5GHz frequency band with less interference, wider channel, and faster speed for the terminals, allowing the users to enjoy excellent wireless experience.

Support routing and AP mode

The device supports both AP and routing mode. A wireless network can be formed with multiple APs, or it can be used as a wireless router when deployed independently. The device offers more flexible configurations, more abundant application features, and more extensive applicable scenarios.

Support Layer 3 networking

The device supports Layer 3 roaming for Layer 3 network. When users move across the Layer 3 networks, seamless roaming can be achieved without service interruption.

Stronger and more stable signals

An aluminum alloy antenna reflector is added to reflect interference signals and focus effective signals so as to provide stronger signal transmission and better receiving sensitivity.

The device uses FBAR to filter out all kinds of interferences caused by the operator's base stations, microwave ovens, Bluetooth devices, etc., so as to provide cleaner wireless signals, higher transmission rate and more stable transmission quality.

Robust casing

With the robust and flame-retardant material of the AP casing, the impact resistance is 5 times higher than that of common ABS plastic materials. The tensile and flexural strengths are increased by 30%, which is not easy to damage. Users can rest assured during usage and maintenance.

Simple installation

The 86mm wall plate installation design facilitates quick installation directly into a standard 86mm wall junction box, without requiring any additional mounting bracket.

Management Features

Multi-way management

The AP supports management via Ruijie Cloud app, Ruijie Cloud platform, equipment EWEB management to achieve multi-end local and remote management on PC, Ruijie Cloud app.

Visualized operation and maintenance

The cloud computing network topology can comprehensively present the equipment operating status of the entire network. Through the rich information in the topology, you can quickly get the full picture of the network (network egress status, link status, device status), and quantify the user experience and network quality, so that users can master the information of the entire network.

Remote collaborative management

Users can perform comprehensive remote operation, management, and maintenance of the equipment in the entire network via the Ruijie Cloud app, Ruijie Cloud platform, etc. They can also share the network to third party for network hosting and collaborative management to operate and maintain the enterprise network more efficiently.

AI & big data network optimization

Through artificial intelligence and cloud big data, the AP can perform comprehensive smart network operation, maintenance and optimization, including but not limited to:

1. Automatic identification of new equipment and adding it into the network, automatic system repair such as avoiding conflict of the WAN IP addresses
2. Smart system optimization such as service-based network policy configuration, RF channel and roaming adjustment
3. Diagnosis and repair suggestions for more than 30 common network anomalies including DHCP conflicts, abnormal negotiation rates, excessive traffic, AP disconnection and device interference.


Technical Specifications

| Model | RG-RAP1200(F) |
|-------------------------|--|
| Hardware specifications | |
| Radio | Dual-stream dual-band |
| Protocol | Concurrent 802.11b/g/n/ac |
| Operating Bands | 802.11b/g/n: 2.4G ~ 2.4835GHz 802.11a/n/ac: 5G: 5.150~5.350GHz, 5.47~5.725, 5.725~5.850GHz (Note: The operating bands vary according to different countries) |
| Antenna | PCB antenna |
| Spatial Streams | 2.4G: 2 Spatial Streams, 2x2 MIMO 5G: 2 Spatial Streams, 2x2 MIMO |
| Max Throughput | 2.4G: up to 400Mbps 5G: up to 866.7Mbps |
| Modulation | OFDM: BPSK@6/9Mbps, QPSK@12/18Mbps, 16-QAM@24Mbps, 64-QAM@48/54Mbps DSSS: DBPSK@1Mbps, DQPSK@2Mbps, and CCK@5.5/11Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM and 256QAM |
| Receiver Sensitivity | 11b: -97dBm(1Mbps), -92dBm(5Mbps), -89dBm(11Mbps) 11a/g: -94dBm(6Mbps), -85dBm(24Mbps), -82dBm(36Mbps), -76.5dBm(54Mbps) 11n: -93.5dBm@MCS0, -74dBm@MCS7, -74dBm@MCS15 11ac: HT20: -92.5dBm(MCS0), -68.5dBm(MCS8) 11ac: HT40: -89dBm(MCS0), -64dBm(MCS9) 11ac: HT80: -86dBm(MCS0), -60.5dBm(MCS8) |
| Maximum Transmit Power | 20dBm (adjustable) |
| Adjustable Power | 1dBm |
| Dimensions | 86*86*29.3 |
| Weight | <0.25kg |
| Service Ports | Front: 1 10/100Mbps Ethernet port Rear: 1 10/100Mbps PoE Ethernet port |
| Management Port | N/A |
| LED Indicator | Support |
| Power Supply | Support 802.3af power supply |
| Power Consumption | <8W |

| Model | RG-RAP1200(F) |
|--------------------------------|--|
| Environment | Operating temperature: 0°C~40°C Storage temperature: -40°C~70°C Operating humidity: 5%~95% (non-condensing) Storage humidity: 5%~95% (non-condensing) |
| Installation | 86mm wall plate installation |
| IP Rating | IP41 |
| Safety Standard | GB4943, IEC 60950-1 |
| EMC Standard | GB9254, EN301 489, EN50155, EN50121, EN55032, EN61000, EN55035 |
| Vibration Standard | IEC61373 |
| Radio Standard | SRRC certification |
| Software Features | |
| Operating Mode | AP mode and routing mode |
| WLAN | Maximum number of clients: 110 |
| | Recommended number of clients: 24 (8 at 2.4GHz, 16 at 5GHz) |
| | Up to 8 SSIDs |
| | Support SSID hiding |
| | Configuring the authentication mode, encryption mechanism, and VLAN attributes for each SSID |
| | SSID-based and radio-based STA limit |
| Support Layer 2 user isolation | |
| Roaming | Support Layer 2 and Layer 3 roaming |
| Security | Support PSK authentication |
| | Support static blacklist and whitelist |
| | Support WPA (TKIP), WPA2 (AES), and WPA-PSK data encryption |
| Routing | Support static IP address, DHCP, PPPoE Dial Up |
| Management and maintenance | Support unified networking of all network equipment |
| | Support local or remote management with Ruijie Cloud app |
| | Support local management with web |
| Platform management features | Support remote management with Ruijie Cloud platform |
| | Automatic RF adjustment via the platform |
| | Unified configuration via the platform |
| | Unified monitoring via the platform |

Typical Applications

RG-RAP1200(F) is an ideal choice for scenarios with simple building structure, no special obstructions, and relatively concentrated users, such as conference rooms, libraries, classrooms, bars, leisure centers, etc. The AP can be flexibly implemented according to different environments.

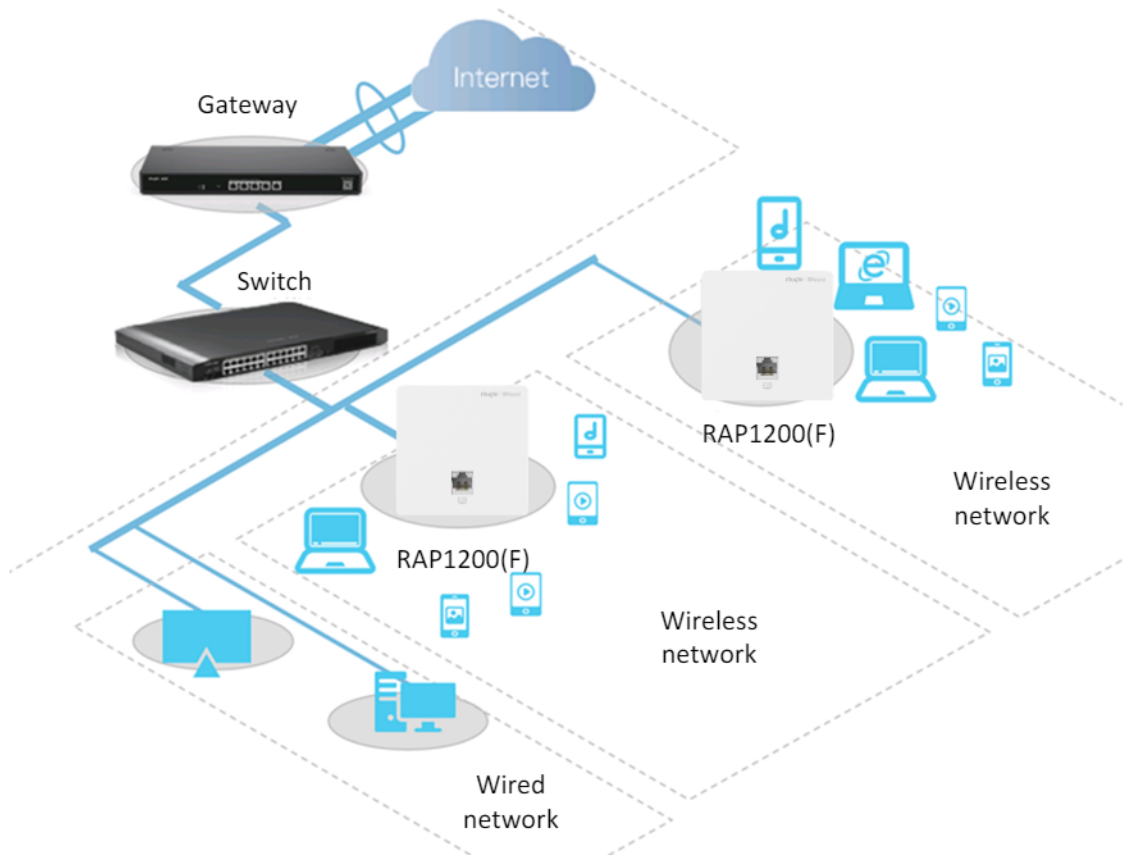

Ordering Information

| Model | Description |
|---------------|---|
| RG-RAP1200(F) | 1300M dual-band FE wall plate AP, dual FE LAN ports, built-in antennas, dual-band 2.4GHz/5GHz, 802.11a/b/g/n/ac Wave1/Wave2, up to 1267Mbps access rate per AP; support AP and routing mode, Layer 3 roaming, Reyyee unified networking and Ruijie Cloud app management; Support PoE and local power supply (PoE module and DC adapter are sold separately) |



Ruijie Networks Co., Ltd.

Technical Support: <http://bbs.ruijiery.com>

Technical Service Center: +86-400-100-0078 (China)

Web: www.reyee.cc www.ruijiery.com

