




CCTV & Security Specialist



# H.265 8-Channel Network Video Recorder

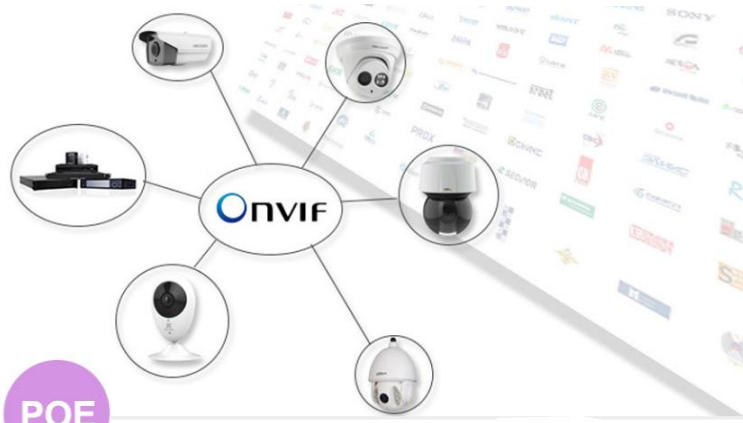

4K   Onvif   Person icon   Smartphone icon   P2P   H.265   HDMI   POE

## H.265 Video Compression

Support H.265 or H.264 ip camera input, smart recording save more storage hdd space

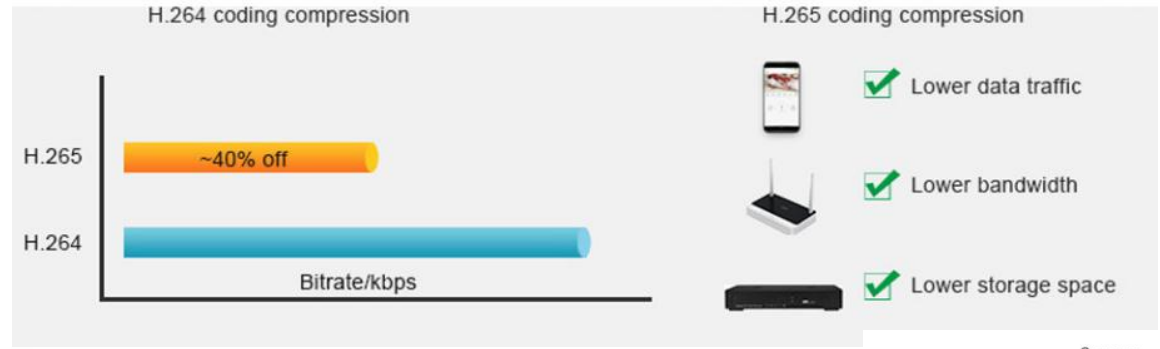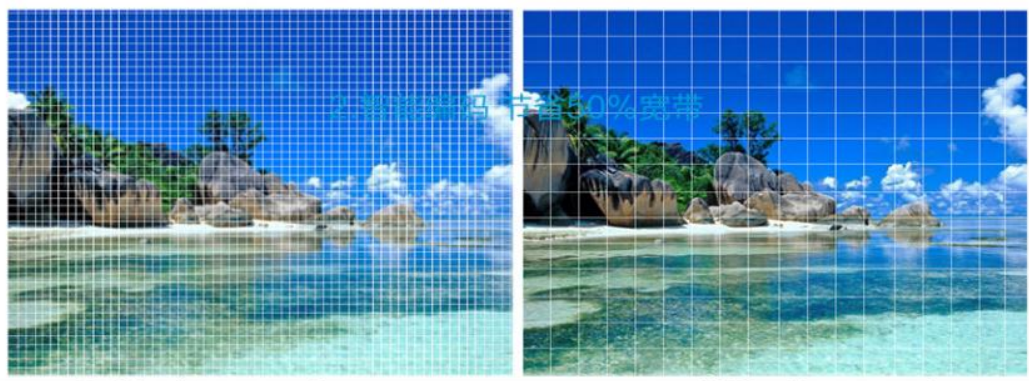


### ▶▶ P2P CLOUD TECH



### CLOUD P2P ONE STEP INTO INTERNET

- P2P Cloud tech makes it easier to do remote view.
- No Need for port forwarding, you can simply use Device Serial Number to visit.

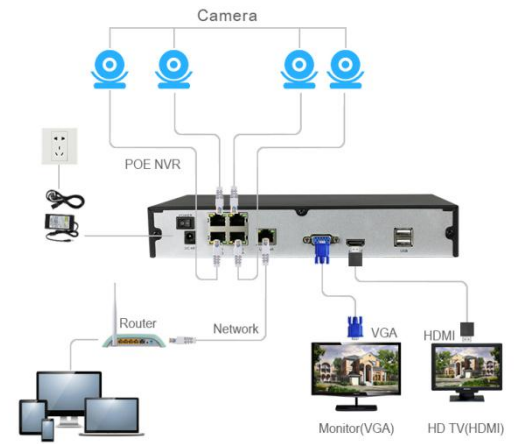



CCTV & Security Specialist

<b>Model No.</b>	<b>NVR-5008</b>	<b>NVR-5008P</b>
PoE	None	8 PoE
<b>Video &amp; Audio</b>		
Video System	50Hz/60Hz	
IP Video Input	8 Inputs	
Video Output	1 VGA(up to 1080P) and 1 HDMI(up to 4K) output	
Two-way Audio Line-in	1 Input, RCA (2.0 Vp-p, 1kΩ)	
Audio Output	1 Output, RCA (2.0 Vp-p, 1kΩ)	
<b>Display &amp; Decoding</b>		
Video Format	H.265/H.264	
Max. Input Bandwidth	60Mbps	128Mbps
Display Resolution	1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080, 1680*1050, 1600*1200, 1900*1200, 2560*1440, 3840*2160 (4K)	
Recording Resolution	8MP / 5MP / 4MP / 3MP / 2MP(1080P) / 1.3MP(960P) / 1MP(720P)	
Peak Decode Performance	1 Channel real-time @ 4K / 5MP 2 Channels real-time @ 4MP 4 Channels real-time @ 2MP	2 Channel real-time @ 4K / 5MP 4 Channels real-time @ 4MP 8 Channels real-time @ 2MP
Recording Mode	Continuous / Manual / Schedule / Motion detection / Sensor Triggered	
HDD Supported	1 SATA HDD, up to 6TB	
<b>Network</b>		
Network Interface	RJ-45 100/1000Mbps self-adaptive Ethernet interfaces	
Network Type	Static IP, DHCP, PPPoE	
Onvif Support	Yes, Ver2.6.1	
P2P Support	Yes, scan QR code to connect to NVR via mobile app	
DDNS Support	Yes	
UPnP Support	Yes, support to forward network port automatically	
Cloud Storage Support	Yes, support to save pictures to Dropbox storage	
Mobile App Support	iOS & Android APP: RxCamView, support to live view max. 80 channels	
<b>Playback &amp; Backup</b>		
Local Playback	Max. 8 Channels	
Network Remote Playback	Max. 4 Channels Simultaneously via CMS, IE/Mac Safari or Mobile App	
Playback Mode	Play, Fast Forward (max. 16x), Fast Rewind (max. 16x), Zoom	
Backup Method	USB, Network	
<b>General</b>		
USB	USB 2.0 x2	
e-SATA	Optional	
RS-485 PTZ Control	N/A	
Sensor & Alarm Port	8 inputs / 1 output	
Power Supply	DC 48V	
Power Consumption (w/o HDD)	8W	
Dimension(WxDxH)	300*227*53mm	
Working Environment	-10°C~+55°C / 10%~90%RH	