

Network 1080P H.265 2MP IR CCD Camera

Deeplet
In Pursuit of Perfection

ONVIF



Full HD
1080

2.0
MEGA-PIXEL

DAY&NIGHT

Ip66
Waterproof

1/3" CMOS

Full HD
1080P

POE



ONVIF

- 1/3" CMOS Sensor
- 3.6mm Fixed Lens
- 18pcs IR Leds
- IR Range: 20 meter
- PoE


Supports ONVIF, Work with ONVIF NVR

H.265 Video Compression

Support H.265 or H.264 ip camera input, smart recording save more storage hdd space

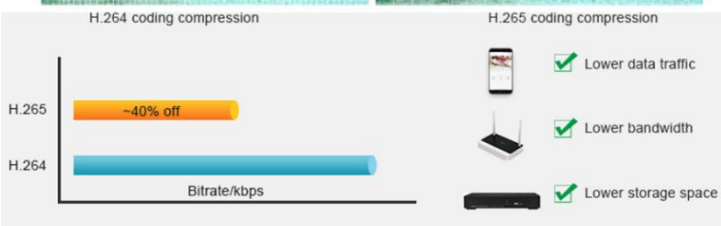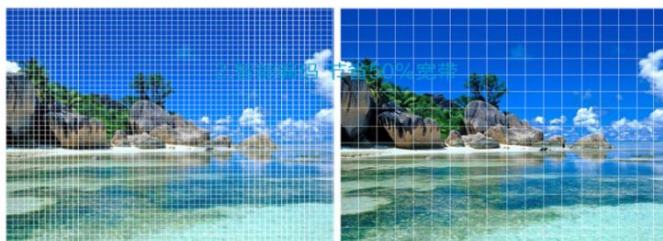

Model	IPC-T200FB
Resolution	2MP 1920(H)x1080(V)
Image Sensor	1/3" Progressive CMOS
Min. Illumination	Color 0.1lux @ F1.2(AGC ON); B/W 0 lux @ IR ON
Shutter	1/5 ~ 1/20000s
Lens	3.6 mm H.FOV: 73°
F.No.	F 2.0 ±5%
Day & Night	IR cut filter with auto switch
WDR	Digital WDR
Video Compression	H.265/H.264
Video bit rate	8Kbps ~ 8Mbps
Frame Rate	Mainstream (1-30fps optional) 3MP(2048x1536)(2304x1296),1080P(1920x1080),960P(1280x960),720P(1280x720) Substream 720P(1280x720),VGA(640x480),QVGA(320x240) Mobilestream VGA(640x480),QVGA(320x240)
BLC	Support
ROI	Support
Privacy Mask	Support
Video Analytics	Perimeter Intrusion Detection, Line Crossing Detection, Stationary Object Detection, Pedestrian Detection, Face Detection, Cross Counting.
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP,
System Compatibility	ONVIF(Ver 2.6)
Interface	RJ45 10M/ 100M Ethernet interface x1
Led	18pcs (DIP)
IR Range	Up to 20m
Power Supply	DC 12V/POE
Consumption	≤7W
Dimension	Ø72 X154mm
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +55°C

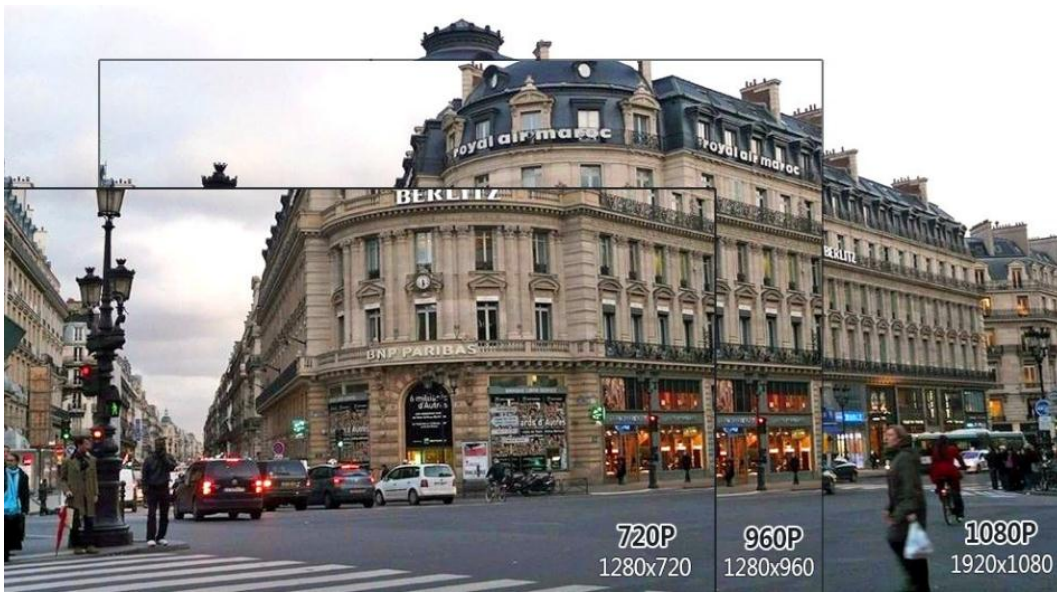

PoE—Power over Ethernet

The PoE (Power over Ethernet) function allows you to get your camera powered via the Ethernet port and transmit video signal at the same time. So no extra power supply is needed when connecting your camera to NVR.



IR-CUT FILTER PIECE

Color Is More Pure During The Day and Night



IR-CUT



Ordinary