

RDAB10-230...

Damper actuator, 10 Nm

Damper actuator for control of dampers in ventilation systems.

- Torque 10 Nm
- For dampers up to approximately 2 m²
- Power supply 100...240 V AC

- On/off or 3-point control signal
- Built-in auxiliary switch RDAB10-230S

RDAB10-230 and RDAB10-230S are damper actuators for control of dampers in ventilation systems.

Simple direct mounting

The damper actuator is easily mounted on the damper spindle with the universal spindle clamp. The actuator is supplied with an anti-rotation strap that prevents it from rotating.

Function

Manual operation is possible with the self-resetting pushbutton (the gearing latch remains disengaged as long as the pushbutton is pressed).

The angle of rotation is adjustable with mechanical end stops.

Flexible signalisation

RDAB10-230S has a built-in adjustable 0...100% auxiliary switch.

High functional reliability

The actuator is overload-proof, requires no limit switches and stops automatically when the end stop is reached.



Models

RDAB10-230 Basic model

RDAB10-230S Model with built-in auxiliary switch

Technical data

Supply voltage 100...240 V AC 50/60 Hz

Power consumption

In operation (at nominal torque) 2.5 W
At rest 0.6 W
For wire sizing 6 VA

Control signal On/off or 3-point
Direction of rotation Selectable with switch

Torque Min. 10 Nm at nominal voltage

Angle of rotation Max. 95°, adjustable 0...100% with mechanical end stops

Running time actuator 150

Sound power level Max. 35 dB (A)
Position indication Mechanical
Protection class IP54
Ambient temperature -30...+50°C
Storage temperature -40...+80°C
Cable 1 m, 3 x 0.75 mm²


Auxiliary switch (RDAB10-230S) 1 mA ... 3 (0.5) A, 250 V AC

Weight Appr. 850 g

The product conforms with the requirements of European EMC and LVD

standards 89/336/EEC and 73/23/EEC and carries the CE-mark.

Wiring

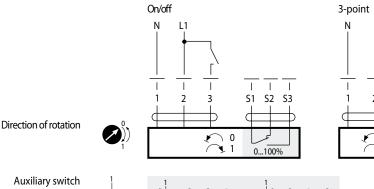


Auxiliary switch Connected with conductors S1, S2 and S3 (only model RDAB10-230S)





Dimensions



Damper spindle	Length	<u> </u>
Clamp on top	min. 40	8 26.7
Clamp on bottom	min. 20	8 20

Measurements in mm

Head Office Sweden
Phone: +46 31 720 02 00
Web: www.regin.se

info@regin.se

Mail:

Sales OfficesFrance: +33 14 171 46 46
Hong Kong: +852 24 07 02 81
Singapore: +65 67 47 82 33



S2 S3

0...1009

S1

0