



Signal Converter with Manual Override

Model: C-410M

The C-410M is a compact Signal Converter with Manual Override function. When the selector switch is in Auto position, 4-20mA input signal will be converted to 0-10V. When the selector switch is in Manual position, the 0-10V output signal will be controlled by the potential meter.

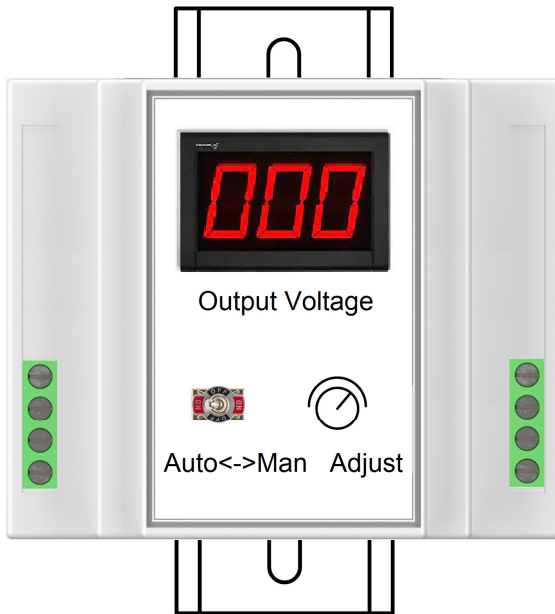

The casing

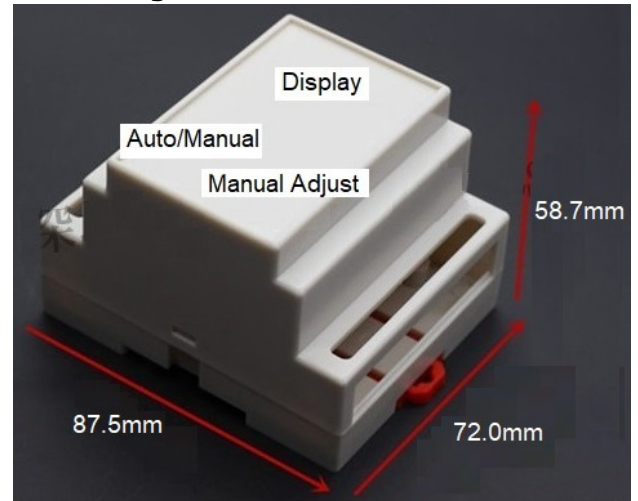

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Input data

Number of inputs	1
Current input signal	4 mA ... 20 mA

Output data


Number of outputs	1
Voltage output signal	0 V ... 10 V

Power supply

Nominal supply voltage	24 V DC
Supply voltage range	15 V ... 24 V DC
Max. current consumption	< 40 mA
Power consumption	< 800 mW

Mechanical

Dimensions (W x L x H)	72.0 mm x 87.5 mm x 58.7 mm
Installation	DIN-Rail Mounting

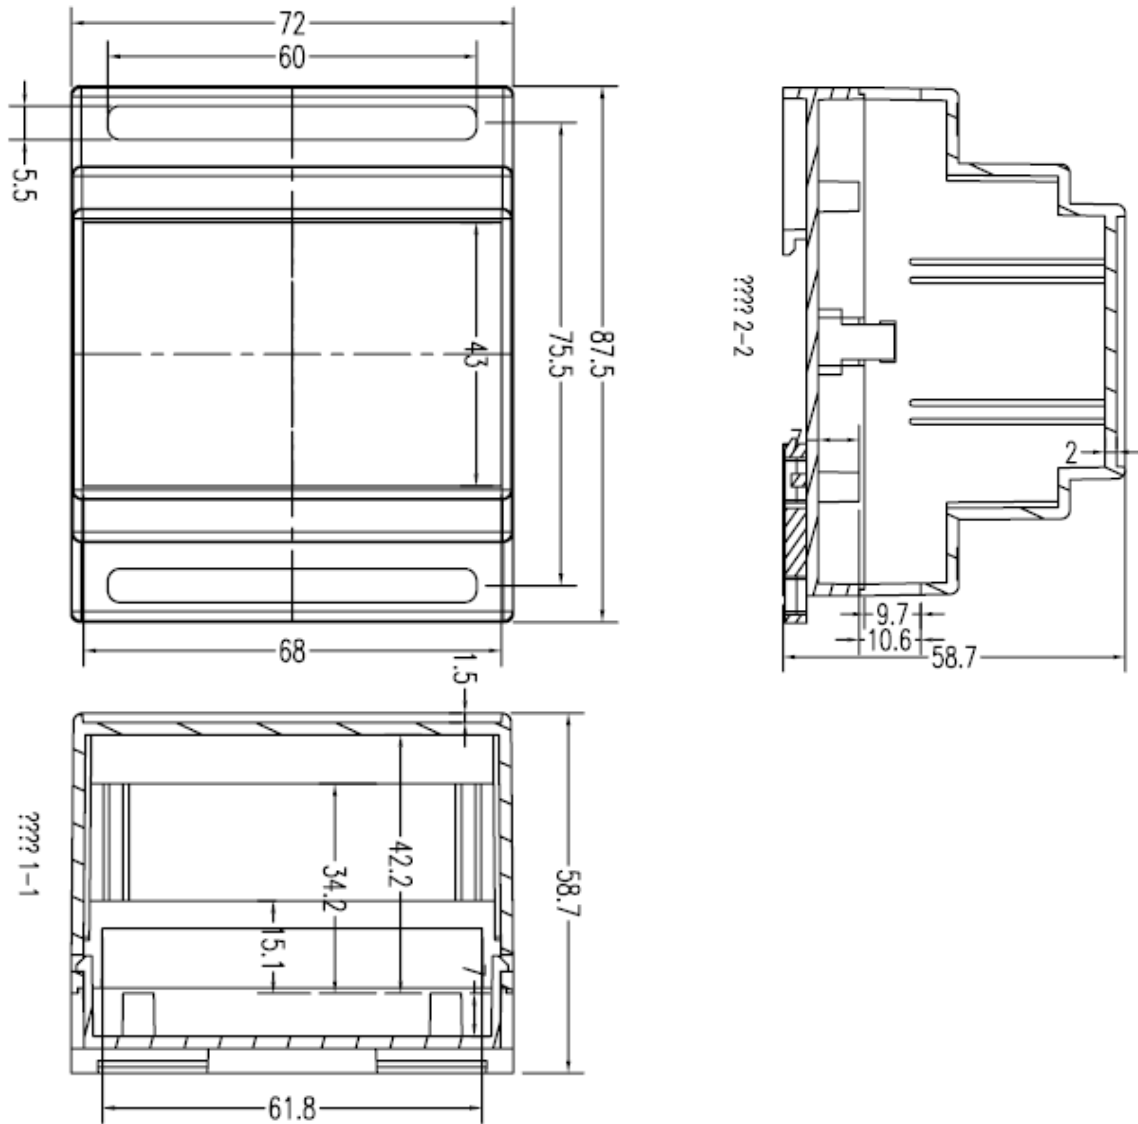

Connections

