

Material No.: Code:

1.2738 40CrMnNiMo8-6-4

DE - Brand:

MCMN

In the DIN EN ISO 4957 the grades 1.2311 (AISI P20), 1.2312 (AISI P20+S) and 1.2738 (AISI P20+Ni) covered by the above mentioned code were amalgamated. The grade 1.2738 contain additional quantities of Ni and no additional quantities of S.

Chemical composition:

(Typical analysis in %)

C	Mn	Cr	Ni	Mo			
0,40	1,50	1,90	1,00	0,20			

Steel properties:

Low sulphur plastic mould steel that is usually supplied in a quenched and tempered condition. The additional Ni content improves the through hardenability large dimensions (>400 mm). Good machinability, better polishability compared to 1.2312 (AISI P20+S).

Similar to AISI P20+Ni.

Applications:

Large plastic moulds highly stressed in core, hydroforming tools.

Condition of delivery:

Quenched and tempered, 950 - 1100 N/mm²

Physical properties:

Thermal expansion coefficient

	10 ⁻⁶ ·m	20-100°C	20-200°C	20-300°C	20-400°C
	m · K	11,8	12,5	13,1	13,3
Thermal conductivity	W	20°C	350°C		
	m · K	39,5	39,1		

Heat treatment:

Soft annealing

Temperature	Cooling	Hardness
710 - 740°C	furnace	max. 235 HB

Stress relief annealing


The recommendation 500 - 550°C is valid for quenched and tempered condition. In the soft annealed condition stress relieving between 600 - 650°C is possible.

Temperature	Cooling	
500 - 550°C	furnace	


Hardening

Temperature	Cooling	Tempering
840 - 870°C	oil or hot bath 180 - 220°C	see tempering diagram


(1.2738) Thermal Cycle Diagram

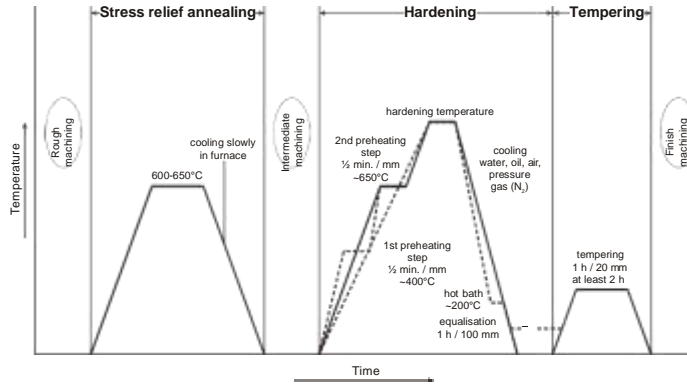

Continuous Cooling Transformation Diagram (CCT)

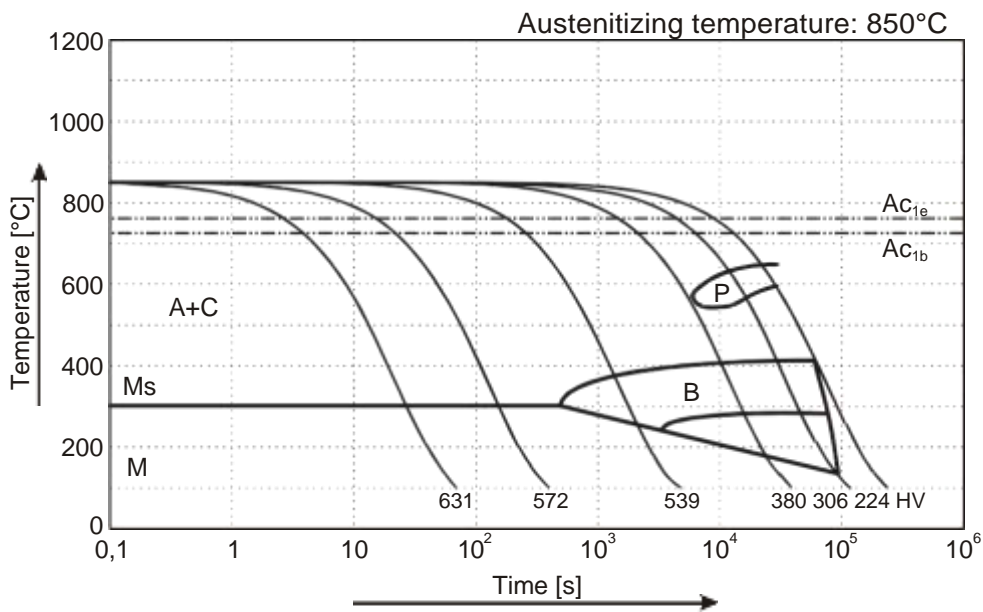

Tempering Diagram

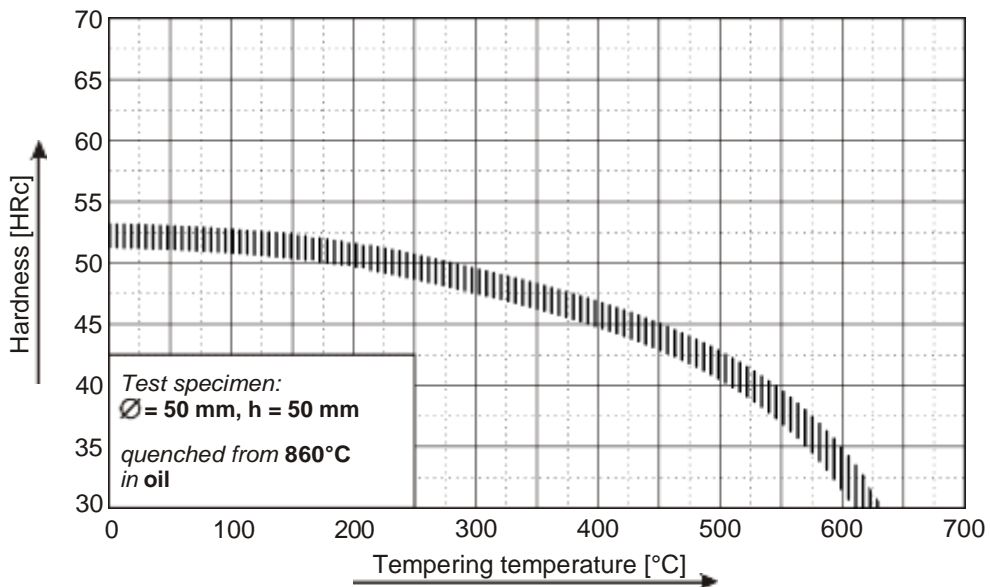

Remarks: All technical information is for reference only.