


PORTABLE TYPE ELECTRODE OVEN design for holding of welding electrode for high quality welds with its constant temperature.

SPECIFICATION

- Drive Off Moisture & Get Better Weld.
- Beware Of Electrode Coating With More Than 20% Moisture, Welding Release
- Hydrogen, Hydrogen Promotes Cracking.
- Mild Steel interior Chamber coated with Heat Resistant paint for minimum heat loss.
- With its build in **Tubular Heating Element** it last longer and reliability than heating wire.

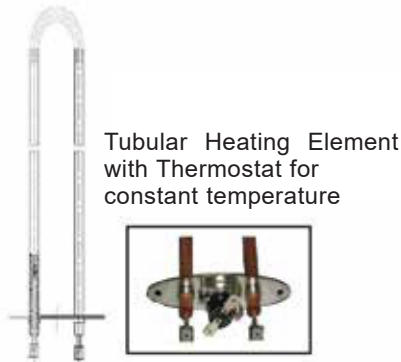

Ac only

PRODUCT CODE	DESCRIPTION	LIST PRICE
A5277000001 P05AC	PORTABLE TYPE ELECTRODE OVEN P 05A	
A5277000002 P10AC	PORTABLE TYPE ELECTRODE OVEN P 10A	
A5277000003 P05DC	PORTABLE TYPE ELECTRODE OVEN P 05D	
A5277000004 P10DC	PORTABLE TYPE ELECTRODE OVEN P 10D	

MODEL	P 05A	P 05D	P 10A	P 10D
Capacity(rod lght 450mm)	5kgs(estimate)	5kgs(estimate)	10kgs(estimate)	10kgs(estimate)
Input Voltage (+-10%)	AC 240V	DC 80V	AC 240V	DC 80V
Temperature (Approx)	150°C	150°C	150°C	150°C
Tubular Heating Element	135 W	115 W	135 W	115 W
Internal Dimension-mm	74 x 74 x 500	74 x 74 x 500	100 x 100 x 500	100 x 100 x 500
External Dimension-mm	145 x 150 x 625	145 x 150 x 625	180 x 180 x 625	180 x 180 x 625
Body Insulation(Rock wool)	25 mm / 1"	25 mm / 1"	25 mm / 1"	25 mm / 1"
Weight	5.3 kgs / 11.7 lbs	5.3 kgs / 11.7 lbs	6.3 kgs / 13.9 lbs	6.3 kgs / 13.9 lbs