


Wall-Mounted Premium Inverter

DC
Inverter



Features

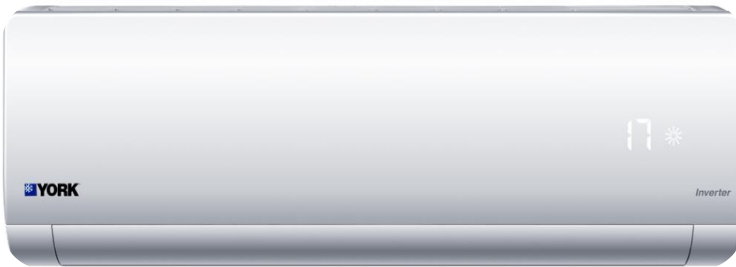

Inverter Technology
Experience a comfortable environment while enjoying higher saving with Inverter Technology.



Rapid Cooling
Achieve faster cooling with our true 5-speed fan design.



Hydro Purifier
Moisturizing and refreshing the air you breathe with hydro purifier.



Quiet Mode
Experience peace and comfort at home with the use of the quiet mode.



Air Surround
Feel the breeze with our 3D airflow technology that ensures even air circulation in your home.



Elegant Design
Aesthetically designed with hidden temperature display on a classy high gloss surface.



Other Features



Comfortable Sleep



Auto Mode



24 Hour Timer



Intelligent Air



Auto Swing



Exquisite Filter



3 Minutes Protection



Auto Restart



Self - Diagnosis

Specifications

Indoor Unit



Outdoor Unit



Wireless Remote Controller



Wired Remote Controller (Optional)



Indoor Unit		Wireless	YWM5J10AAS-W	YWM5J13AAS-W	YWM5J20AAS-W
		Wired	YWM5J10AAS-SLM	YWM5J13AAS-SLM	YWM5J20AAS-SLM
Outdoor Unit			YSL5J10AAS	YSL5J13AAS	YSL5J20AAS
Cooling Capacity	Btu/hr		10,000 (3,100-11,900)	12,800 (4,400-14,800)	18,000 (6,100-20,600)
Input Power	W		795 (300-1,210)	1,040 (300-1,650)	1,370 (350-2,228)
Rated Current	A		3.46 (1.50-6.10)	4.52 (1.30-7.90)	5.95 (1.40-10.90)
EER	Btu/hr/W		12.58	12.31	13.14
Power Source	Ph/V/Hz		1Ph/220-240V/50Hz		
Refrigerant Type/Control			R410A / OUTDOOR CAP.TUBE		
Indoor Air Flow (H/L)	CFM		295/180	400/230	650/350
Noise Level (H/L)	dB(A)		34/25	39/25	45/29
Dimension (WxHxD)	Indoor	mm	795x265x187	938x235x187	1,046x299x234
	Outdoor	mm	780x540x245	780x540x245	780x540x245
Unit Weight	Indoor	kg	9.50	11.50	13.00
	Outdoor	kg	26.50	25.50	30.00
Refrigerant Piping	Liquid	mm/in	6.35 / 1/4	6.35 / 1/4	6.35 / 1/4
	Gas	mm/in	9.52 / 3/8	9.52 / 3/8	12.70 / 1/2

Indoor Unit		Wireless	YWM5J22AAS-W	YWM5J25AAS-W	YWM5J30AAS-W
		Wired	YWM5J22AAS-SLM	YWM5J25AAS-SLM	YWM5J30AAS-SLM
Outdoor Unit			YSL5J22AAS	YSL5J25AAS	YSL5J30AAS
Cooling Capacity	Btu/hr		21,000 (6,100-23,800)	24,200 (9,500-29,000)	28,000 (9,600-31,500)
Input Power	W		1,895 (350-2,228)	2,020 (390-2,900)	2,600 (390-2,980)
Rated Current	A		8.24 (1.40-10.90)	8.78 (1.60-13.60)	11.30 (1.60-13.70)
EER	Btu/hr/W		11.08	12.00	10.77
Power Source	Ph/V/Hz		1Ph/220-240V/50Hz		
Refrigerant Type/Control			R410A / OUTDOOR CAP.TUBE		
Indoor Air Flow (H/L)	CFM		650/350	650/460	650/460
Noise Level (H/L)	dB(A)		45/29	46/37	46/37
Dimension (WxHxD)	Indoor	mm	1,046x299x234	1,147x320x261	1,147x320x261
	Outdoor	mm	780x540x245	860x730x308	860x730x308
Unit Weight	Indoor	kg	13.00	16.50	16.50
	Outdoor	kg	30.00	52.50	52.50
Refrigerant Piping	Liquid	mm/in	6.35 / 1/4	6.35 / 1/4	6.35 / 1/4
	Gas	mm/in	12.70 / 1/2	15.88 / 5/8	15.88 / 5/8

Note:

- All designs and specifications are subjected to change without prior notice for product improvement
- Nominal cooling capacity is based on the conditions below
Power supply, 1Ph/230V/50Hz
Cooling – Indoor: 27 °C DB /19 °C WB and Outdoor 35 °C DB / 24 °C WB
- Units are tested and comply with the latest ISO5151

Head Office:

YORK (MALAYSIA) SALES & SERVICE SDN BHD (168496-T)

Bangunan THK, Suite 2.1, 2nd Floor,
No.2A, Jalan 243, Section 51A,
46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel. 03-7628 4100 Fax: 03-7628 4101

Branches:

Penang Branch
Tel. 04-397 0213 Fax: 04-397 2045

Melaka Branch
Tel. 06-283 3188 Fax: 06 -283 3188

Johor Bahru Branch
Tel. 07-354 9878 Fax: 07-354 9871

Kuching Branch
Tel. 082-553 100 Fax: 082-553 200

Kota Kinabalu Branch
Tel. 088-448 350 Fax: 088-448 352



Authorized Dealer

Customer Care Centre: 1800 – 88 – YORK (9675)

Website: www.york.com/my