



# Floor Ceiling Convertible Premium Inverter - R410A



## Features

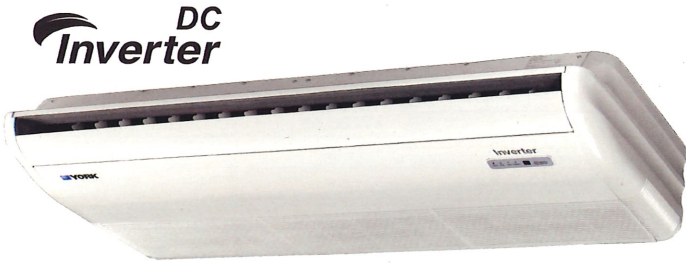

**Inverter Technology**  
Experience a comfortable environment while enjoying higher saving with Inverter Technology.



**Smart Convertible**  
Indoor unit can be installed on floor or ceiling with a dual drain pan.



**4-Speed Drive**  
4-Speed Drive provides extra cooling during the hotter days.



**Rapid Cooling**  
Achieve faster cooling with our true speed fan design.



**Super Slim**  
(Applicable to 11,200~24,000 Btu/hr)  
Super slim design that fits narrow ceiling spaces.



**Easy Maintenance**  
Air filter is easily dismantled and cleaned, which allow a healthy indoor environment.



## Other Features



Comfortable Sleep




Auto Mode



24 Hour Timer



High Performance Compressor



Auto Swing



Exquisite Filter



3 Minutes Protection




Auto Restart



Self - Diagnosis

# Specifications

## Indoor Unit

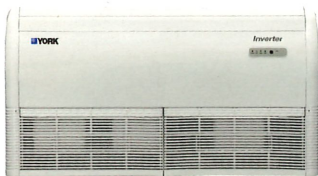

## Outdoor Unit



## Wireless Remote Controller



## Wired Remote Controller (Optional)



Indoor Model	Wireless	YCE5J10AAS-W	YCE5J15AAS-W	YCE5J20AAS-W	YCE5J25AAS-W
Outdoor Model		YSM5J10AAS	YSM5J15AAS	YSM5J20AAS	YSM5J25CAS
Cooling Capacity	Btu/hr	11,200 (2,389~13,310)	13,000 (3,071~15,357)	18,000 (5,082~18,088)	24,000 (6,143~24,866)
Input Power	W	1,020 (280~1,800)	1,020 (280~1,800)	1,500 (550~2,000)	2,210 (500~2,600)
Rated Current	A	5 (1.2~8)	5 (1.2~8)	6.8 (2.3~9.5)	9.5 (2.3~12)
EER	Btu/hr/W	10.98	12.75	12	10.86
Power Source	Ph/V/Hz	1Ph/220-240V/50Hz			
Refrigerant Type/ Control		R410A / OUTDOOR ELECTRONIC EXPANSION VALVE			
Indoor Air Flow (H/L)	CFM	382/265	382/265	470/382	500/424
Noise Level (H/L)	dB(A)	41/33	41/33	44/36	44/36
Dimension (WxDxH)	Indoor	mm	990x655x199	990x655x199	990x655x199
	Outdoor	mm	780x245x540	780x245x540	810x288x688
Unit Weight	Indoor	kg	26.3	26.3	28.3
	Outdoor	kg	31.2	31.2	43
Refrigerant Piping	Liquid	mm/in	6.35 / 1/4	6.35 / 1/4	6.35 / 1/4
	Gas	mm/in	9.52 / 3/8	9.52 / 3/8	12.7 / 1/2

Indoor Model	Wireless	YCE5J30AAS-W	YCE5J40AAS-W	YCE5J50AAS-W
Outdoor Model		YSM5J30CAS	YSM5J40CAS	YSM5J50CAS
Cooling Capacity	Btu/hr	30,000 (6,494~31,398)	44,500 (18,770~45,390)	48,000 (18,770~49,486)
Input Power	W	2,500 (500~4,200)	3,900 (2,000~6,000)	4,100 (2,000~6,000)
Rated Current	A	10.2 (2.2~18.5)	6.6 (2.9~10)	6.7 (2.9~10)
EER	Btu/hr/W	12	11.41	11.71
Power Source	Ph/V/Hz	1Ph/220-240V/50Hz	3Ph/380-415V/50Hz	
Refrigerant Type/ Control		R410A / OUTDOOR ELECTRONIC EXPANSION VALVE		
Indoor Air Flow (H/L)	CFM	959/809	1,176/824	1,176/824
Noise Level (H/L)	dB(A)	49/43	53/49	53/49
Dimension (WxDxH)	Indoor	mm	1,298x700x240	1,580x700x240
	Outdoor	mm	948x340x840	1,008x410x830
Unit Weight	Indoor	kg	37	54
	Outdoor	kg	64	82
Refrigerant Piping	Liquid	mm/in	9.52 / 3/8	9.52 / 3/8
	Gas	mm/in	15.88 / 5/8	19.05 / 3/4

- Note:
- All designs and specifications are subjected to change without prior notice for product improvement
  - Nominal cooling capacity is based on the conditions below  
Power supply, 1Ph/230V/50Hz  
Cooling - Indoor: 27°C DB /19°C WB and Outdoor 35°C DB / 24°C WB
  - Units are tested and comply with the latest ISO5151

### Head Office:

YORK (MALAYSIA) SALES & SERVICE SDN BHD (168496-T)  
Bangunan THK, Suite 2.1, 2<sup>nd</sup> Floor,  
No.2A, Jalan 243, Section 51A,  
46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel. 03-7628 4100 Fax: 03-7628 4101

### Branches:

Penang Branch  
Tel. 04-397 0213 Fax: 04-397 2045

Johor Bahru Branch  
Tel. 07-354 9878 Fax: 07-354 9871

Kota Kinabalu Branch  
Tel. 088-448 350 Fax: 088-448 352

Kuching Branch  
Tel. 082-553 100 Fax: 082-553 200



(Applicable to 2.8 HP and below)

### Authorized Dealer

Customer Care Centre: 1800 - 88 - YORK (9675)

Website: [www.york.com/my](http://www.york.com/my)