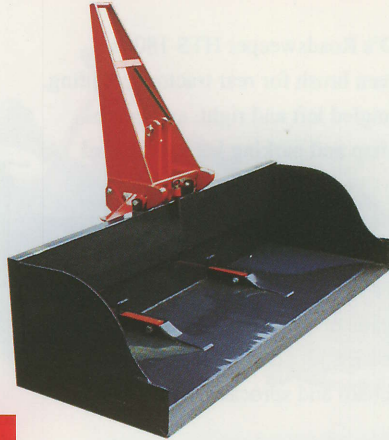


LEVELLING BUCKET HMB 210

Functional design with first-class material and workmanship. HOWARD's Levelling Bucket HMB 210 is a useful contractor's implement for road building, levelling, on construction sites or for quarry work.

Width : 210 cm. Weight : 340 Kg.

Three-point tractor linkage (CAT I/II) - for tractors of min. 35 hp.
Springloaded tip-lock.

*POST-HOLE DIGGERS PHD 45*

HOWARD's Post-hole Diggers are labour-saving implements for erecting masts, poles, signs, fences etc. with speed and accuracy.

Spring loaded stabiliser bar ensures vertical penetration. Double auger spiral (above 9") for efficient soil displacement. PTO Drive shaft with Shearbolt Torque Limiter.

Specification	PHD 45
Tractor hp, recommended	35-85
3-Point Linkage, Cat.	I/II
Boring depth, max. (cm)	90
Hole Diam. max	24"
Weight, Kg. (excl auger)	180
Augers	6" 9" 12" 18" 20" 24"

The Owner's Manual supplied with each machine contains guidelines on adjustment of cardan tubes to suit tractor linkage as well as comprehensive operational and maintenance instructions.