


B-16 (Beaver) is available in 3 standard working widths (125, 155 and 180 cm) and is suitable on small farms, in paddy fields and in cash crop agriculture for primary and secondary tillage.

With optional bedformer kit it is equally useful for furrowing and preparing dry-land seedbeds for vegetable farming.

Compact and lightweight - with low horsepower requirement.

Bearings and other bought-in components are sourced from renowned international manufacturers.

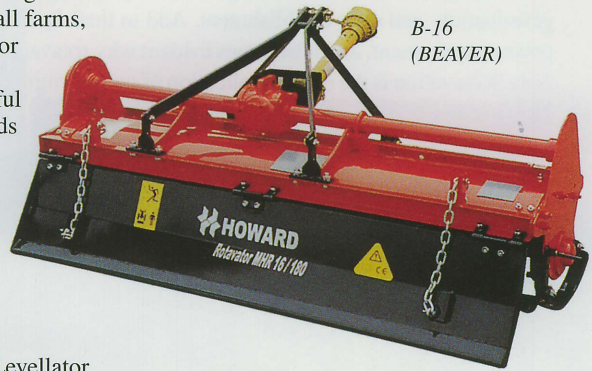

B-16
(BEAVER)

PADDY LEVELLATOR

Both B-16 and B-36 are available also with Levellator attachment- for a smooth 2nd/3rd pass finish in wet-land.

Ask for Howard's Paddy Levellator leaflet.

	B - 16		
Specifications	125	155	180
Working width, cm	125	155	180
Working depth, cm	15		
For tractor, hp	25 - 55		
3-Point Linkage, Cat.	I/II		
Universal Driveshaft	A4 w/shearbolt		
Gearbox	Single speed		
Rotor speed at 540 PTO	210 rpm		
Side drive	Chain & sprockets		
Number of Blades	30	36	42
Weight, Kg.	270	290	310

