

Kubota



KUBOTA DIESEL TRACTOR

L

L4400

From small chores to tough commercial jobs, our L4400 tractor offers more to meet your demands head-on.




Looking for a tractor with high horsepower and incredible versatility? Look no further.

A potent 45.3HP Kubota engine puts you in total command.



World renowned for its reliability and power, the L4400's Kubota E-TVCS diesel engine generates 37.5 PTO horsepower to let you tackle any job. The rugged power plant also delivers dynamic output and high torque, and produces cleaner emissions with low noise and vibration.

User-friendly hydraulic independent PTO & 3-point hitch

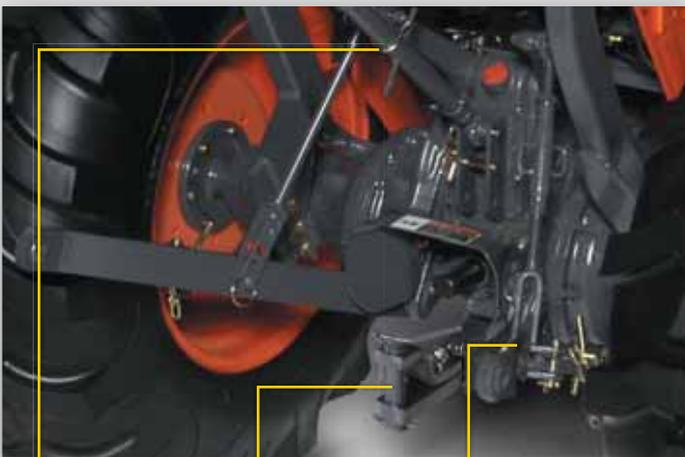

Top-link holder

Drawbar clevis

Telescopic stabilizer

This convenient feature lets you operate the hydraulic independent PTO without using a clutch. Operating its stationary PTO is as easy as flipping up the driver's seat. Other features include a top link holder and telescopic stabilizers.

Standard Roll-Over Protective Structure (ROPS)

Wet-disc brakes

42-lit large



1845 mm-long wheel base

Spacious operator's platform

By setting the rear fenders further apart and employing a full-flat deck design, the L4400 provides ample space for the driver. Its hanging-type pedals also increase space while offering effortless operation.



**Power, fast travel speed,
better than the L4400.**

L4400

Shuttle transmission for higher productivity

Get a grip on the L4400's range shift—it has a forward/reverse mechanical shuttle shift in the low and reverse ranges. Plus, the transmission offers 8 forward and 4 reverse speeds (8F/4R), enabling you to select the perfect speed for higher productivity.



ers extra-
fuel tank



Hydrostatic power steering

Not only responsive, but our fatigue-reducing hydrostatic power steering remains light and smooth even when working with heavy loads.

Enclosed muffler with low-exit exhaust

For a totally unobstructed view, the muffler is concealed under the hood, plus the exhaust is released from underneath.

Bevel gear 4-wheel drive

A superior feature that delivers an extremely tight turning radius with full power transfer to the wheels at every steering angle.

Full-open hood and slide-out grill

Whether performing simple maintenance or a more involved repair, a one-piece, full-opening hood exposes most engine components, making it easier to do either.



SPECIFICATIONS

Model	L4400		
Engine			
Model	V2203-M-E2A		
Type	Vertical liquid-cooled 4-cycle diesel, indirect injection (E-TVCS)		
Engine gross power	HP (kW)	45.3 (33.8)@2600 rpm	
Engine net power	HP (kW)	43.0 (32.1)@2600 rpm	
PTO power	HP (kW)	37.5 (28.0)@2600 rpm	
No. of cylinders	4		
Bore & stroke	mm	87×92.4	
Total displacement	ℓ	2.197	
Battery	12V, RC:133min, CCA:582A		
Fuel tank capacity	ℓ	42	
PTO			
Rear PTO	rpm	540 / 2475, hydraulic, live-independent	
Hydraulics			
Pump capacity (main)	ℓ/min.	29.4	
(PS)	ℓ/min.	17.9	
3-point hitch	Category I		
Lift control type	Position control		
Lift capacity at lift point	kg	1300	
at 24 in. behind LP	kg	1053	
Traveling System			
Transmission	8 forward and 4 reverse, sliding gear and constant mesh		
Steering	Hydrostatic power steering		
Brakes	Wet disc type		
Clutch	Dry-type single stage		
Rear differential lock	Standard		
Standard tyre size	Front/Rear	8-16/14.9-24	
Traveling Speeds w/standard tyres (at Rated Engine Speed)	km/h	Forward 2.0-24.0	Reverse 2.4-8.2
Dimensions			
Overall length (w/o 3P)	mm	3005	
Overall width (min. tread)	mm	1585	
Overall height (w/ ROPS)	mm	2170	
Wheelbase	mm	1845	
Min. ground clearance (Front axle)	mm	385	
Tread width	Front mm	1145	
Rear	mm	1180, 1205, 1300, 1450, 1545	
Min. turning radius (w/ brake)	m	2.6	
Weight (w/ ROPS)	kg	1430	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. Please contact your local Kubota dealer for warranty, safety or product information.

©2012 Kubota Corporation



KUBOTA Corporation

2-47, Shikitsu Higashi 1-chome, Naniwa-ku,
Osaka, Japan
Fax (06) 6648-3521

Cat.No.3217-01-MA Printed in Japan.D. '12-FEB.