



# ENAMEL PAINT





# ENAMEL PAINT



\* Ivory 10C31



Primersore 4053



Magnolia 3033



Jasmine 4055



Light Beige 3040



\* Sunrise Yellow 6669



Evening Glow 6619



Sunset 1188



Precious Pink 7627



\* Sunrise 0004




\* Chrome Yellow 0003



\* Golden Honey 6627



Celebration 1504



Paprika 6623/2023



\* Deep Leather 3045



\* Golden Brown 3044



\* Maroon 1024




\* Signal Red 6613/6437



Leather 2037/10C39



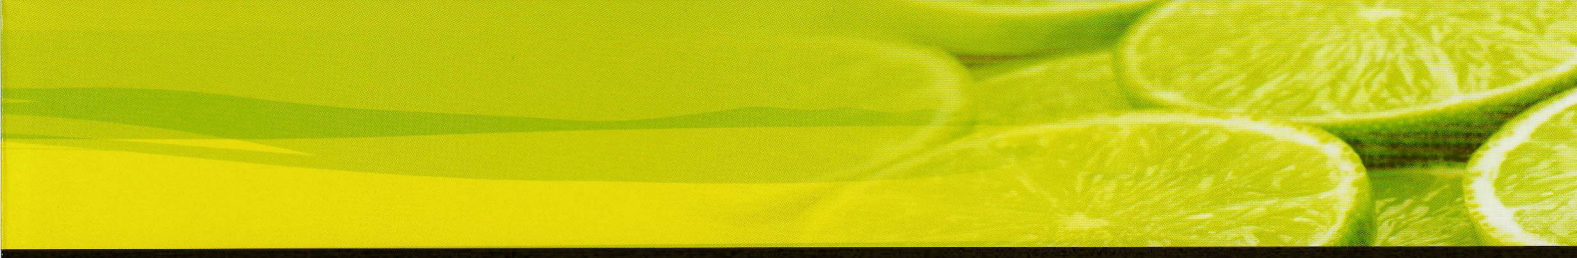

\* Steel Grey 9097



\* Apple Green 6638



\* Spruce 6074



Regal Blue 0013



\* Executive Grey 6604



Green 6644



\* Conifer 3339



\* Wira Blue 6227



\* Pewter 9095



Pangkor 6413/3413



\* Tropicana 12E53



\* Marine Blue 6649



Silver Mist 9093




Sky Blue 0030



Mirage 6660/2060



\* Neptune 6631/2031

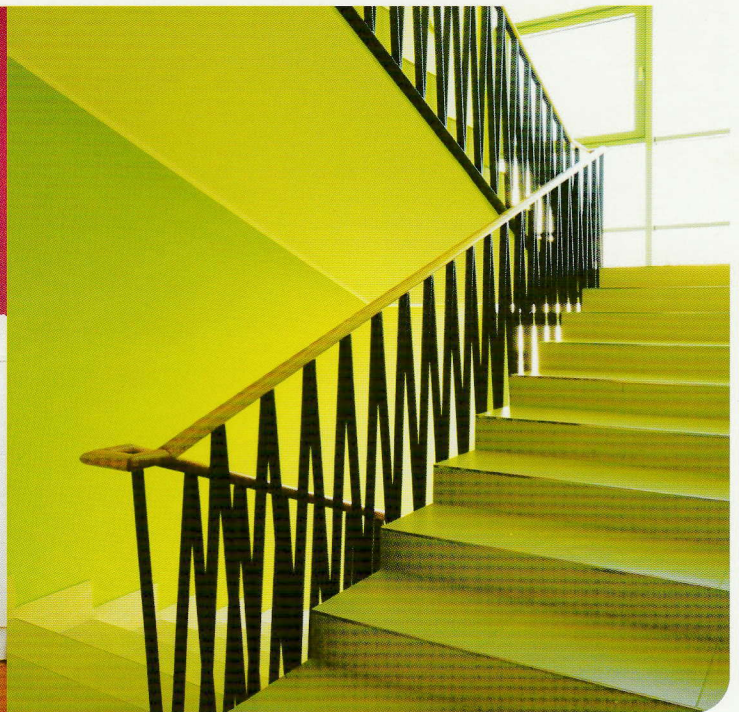

\* Also available in 5 Litre.



# ENAMEL PAINT



SC Enamel Paint is an excellent gloss paint with outstanding durability. It is ideal for interior wood, and metal surfaces.

#### DIRECTION FOR USE

Ensure all surfaces that need to be painted are clean, dry and free from chalk, oil, grease and all foreign matter. Stir well before use. Application can be used by brush, roller or spray. If thinning is required, thin up to maximum 10% of Turpentine or Thinner may be added. For the best results, apply two coats of SC Enamel Paint. Allow to dry ½ -1 hours before recoating.

**CAUTION :** Keep away from open flame and provide adequate ventilation.

SC Enamel Paint 是一种光泽鲜艳的光面漆，它可用于室内，光泽历久不变。它适用于木材，钢或铁的表面上。

#### 用法

确保漆刷表面干净无暇，绝无污垢，油脂，蜡质或其它异物。使用前需搅拌均匀。可用漆扫，滚轴涂刷或喷射。如需要调稀，可加入不超过10%的稀释剂或天那水。涂上两层的 SC Enamel Paint 其效果最佳。让表面完全干透½至1小时才漆上另一层。

注意：远离火源，空气要流畅

SC Enamel Paint ialah cat kilat memberi hasil kilatan yang unggul dan juga tahan lasak. Ia sesuai untuk permukaan kayu, dan besi dalam rumah.

#### PERATURAN MENGGUNAKAN

Pastikan permukaan yang hendak dicat bersih dan kering serta bebas daripada habuk, minyak atau gris. Kacau rata sebelum digunakan. Cat ini boleh disapu dengan berus, penggelek atau penyembur. Jika pencairan diperlukan, cairkan dengan maksima 10% Turpentine atau thinner. Untuk hasil yang memuaskan, sapu 2 lapisan SC Enamel Paint. Biarkan ½ -1 jam pengeringan untuk ulang cat lapisan yang kedua.

**AWAS :** Jauhkan dari api dan simpan di kawasan lapang.



INTERIOR



WALL



ROLL ON



METAL



BRUSH ON




SPRAY ON



COLOUR MATCHING



BUATAN MALAYSIA



實誠五金貿易有限公司

**SZE CHERN HARDWARE TRADING SDN BHD** (776154-V)

No. 8, Jln Utarid U5/25, Seksyen U5, Mah Sing Integrated Industrial Park, 40150 Shah Alam, Selangor D.E, Malaysia

Tel : +60 (3) 7846 5591 Fax : +60 (3) 7846 5391

Email : szechernhardware@gmail.com Website : www.szechernhardware.com.my