



2 in 1

Smar coating

防水做得好
夫妻恩爱到老
Smar Coating
高弹防水涂料
拥有超强桥接能力
爱巢不再潮



Smar Waterproof Coating is a thick single-component water-base macromolecule waterproof coating film made scientifically out of the base of high quality modified acrylate copolymerization emulsion, and multiple auxiliary and filler.

Items	Technical Index	Typical Values
Tensile strength	≥ 1.0Mpa	1.2Mpa
Elongation at break	≥ 300%	968.4% (Sirim Test)
Solid content	≥ 65%	74%
Surface drying time	≤ 4h	40min
Hard drying time	≤ 8h	1h 30min
Flexibility at low temperature	-10° c, No Crack	-10° c, No Crack
Water tightness (0.3Mpa, 30min)	Impermeable	Impermeable



1 Surface preparation



2 First layer



3 Second layer



4 Ponding test




5 Finishing

Advantages

- Adhesion: Provide excellent adhesion, damp substances constructability.
- Easy of application: Be ready to use and easy to apply by brush.
- Flexibility at Low Temperature: No cracking for bending at -10°c.
- Flexibility: Flexible, accommodates movements in cracks, does not crack with aging.
- Eco-friendly: Water based hence non-hazardous.

Uses

- RC gutter
- RC planter boxes
- Floor slabs
- External decks, landscaped area
- External wall
- RC flat roof
- New / old masonry and concrete
- Wood siding / fences
- Metal / steel roof
- Terraces, balconies and services yards

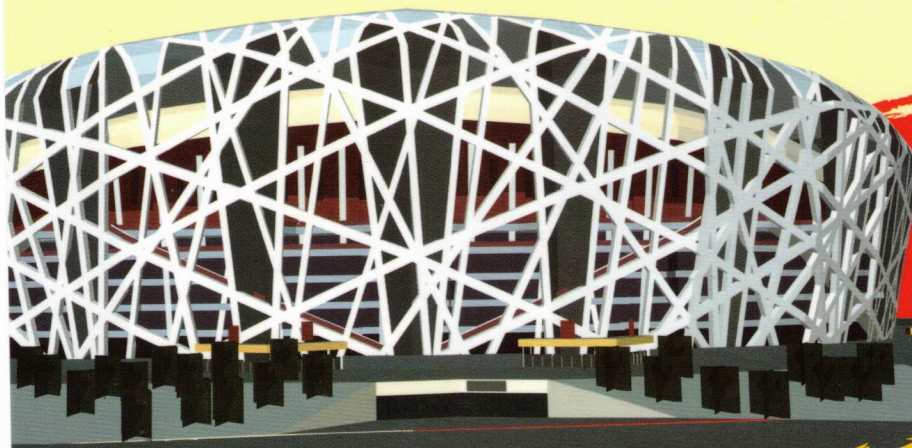

雨虹防水
专注防水20年
鸟巢防水供应商

只有一个东方雨虹
Oriental Yuhong, The Unique