


01 Series 1%RH (Digital Control Panel: 1%RH)

Dry Unit **×2** 

Superior Recovery after Frequent Door Openings

01 series are equipped with 2 powerful patented dry units to reach ultra-low humidity min. 1%RH which meets IPC/JEDEC J-STD-033C demands, and provide the most effective solution to

1. Micro-cracks in Integrated Circuits like QFP and BGA
2. Delaminations in Printed Circuit Boards and Rework Devices
3. Defects Caused by Heating in Lead-free SMD Devices

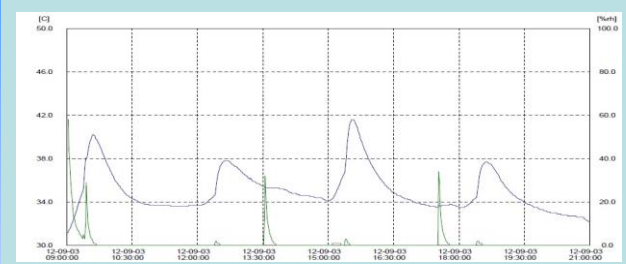

Door open-and-close test



Model	HSD-1106-01	HSD-1104-01	HSD-702-01	HSD-302-01	HSD-502-01	HSD-252-01
External WxHxD (mm)	1200x1840x670		620x1840x780	500x1230x640	880x900x740	880x900x380
Internal WxHxD (mm)	1190x1560x620		610x1560x730	490x1160x590	870x830x690	870x830x330
Capacity (L)	1160		680	340	510	252
Weight (kg)	167	162	117	67	67	46
Mean power Consumption	56W/h=40.4kW/month			56W/h=40.4kW/month		
Rated voltage	AC220V, 50/60Hz (Other voltage is optional)					
Material	ESD safe painted steel body and shelves					
Shelves	5 pcs			7 pcs	3 pcs	

