

02 Series (Digital Control Panel: 2%RH)


Dry Unit ×1



Medium to Long Term Constant Ultra-Low Humidity Storage

02 series are equipped with 1 patented dry unit to constantly maintain the ultra-low humidity to min. 2%RH, to meet IPC/JEDEC J-STD-033C demands, and are ideal for the moisture proof and anti-oxidation storage of the following items.

- 1.Storage of all kinds of Interacted Circuits and Silicon Wafers etc
2. Storage of PDP Inspection Equipments and Liquid Crystal Cleaning Equipments etc
- 3.Storage of Aerospace related instruments and Tools
- 4.Storage of Optical Equipments and Digital Media
- 5.Storage of Chemicals, Medicine, Cultural Assets, etc

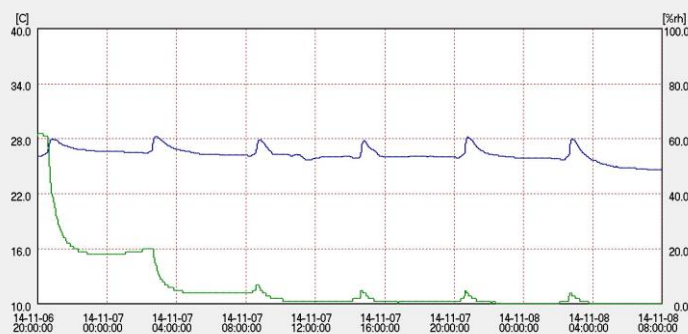

02 series unloaded test



SD-1106-02



SD-1104-02



SD-702-02



SD-302-02



SD-502-02



SD-252-02




SD-151-02

Model	SD-1106-02	SD-1104-02	SD-702-02	SD-302-02	SD-502-02	SD-252-02	SD-151-02
External WxHxD (mm)	1200x1840x670		620x1840x780	500x1230x640	880x900x740	880x900x380	500x630x580
Internal WxHxD (mm)	1190x1560x620		610x1560x730	490x1160x590	870x830x690	870x830x330	490x560x530
Capacity (L)	1160		680	340	510	252	145
Weight (kg)	160	155	110	60	60	39	29
Power Consumption	28W/h			28W/h			21W/h
Rated Voltage	AC220V, 50/60Hz (Other voltage is optional)						
Material	ESD safe painted steel body and shelves						
Shelves	5pcs			7pcs	3pcs		

Applications in Production Process

1) IC packages



2) Silicon Wafer



3) Liquid Crystal Glass (LCG) Board



4) PCBs



5) Ceramics



6) Optical Fiber. CCD etc

