




HYDRAULIC OIL BUILT FOR PERFORMANCE

Benefits :

- Excellent performance and anti-wear protection
- High thermal and oxidation stability
- Good anti-foam characteristics

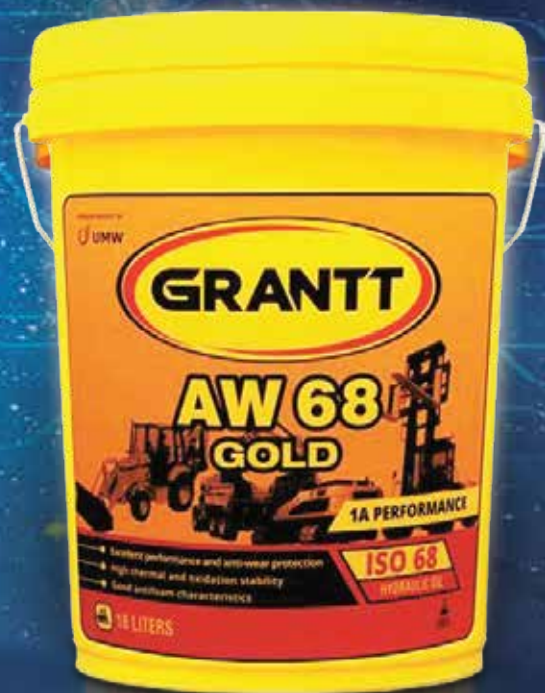

Pack Size :

18 Liters (Pail) & 209 Liters (Drum)

Grantt AW 68 GOLD is formulated and fortified with anti-wear, corrosion, oxidation and foam inhibitor to provide maximum protection required by both high and low pressure industrial hydraulic systems under severe applications. Its unique formulation ensures high resistance of thickening in service, excellent protection of machine surfaces against corrosion, thermal and oxidative stability as well as rust control.

Specification :

- Parker (formerly Denison) HF-0, HF-1, HF-2 (HM)
- Eaton M-2950-S and I-286-S3
- MAG P68, P69 and P70 (HM)
- DIN 51524-2 (HM)
- ISO 11158 (HM)
- ASTM D6158 (HM)
- SAE MS 1004 (HM)
- Bosch Rexroth RE 90220
- JCMAS P041 HK Hydraulic specification
- ANSI/AGMA 9005-E02-RO
- GM LS-2
- AIST 126, 127
- SEB 181222

Quality Product by:



**MEMBER OF
UMW GROUP**