



# LED Tri Proof Lamp ( HL )



## Product Description:

- Damp proof, dust proof & anti corrosion which suitable for indoor and outdoor environments.
- High output with low glare optical diffuser
- Easy to install and maintain
- Surface Mounted
- With built-in surge protection device (SPD)

## Applications


- Underground Car Parks
- Pump rooms
- Condominium stair wells and corridors
- Stores , warehouse and basement
- Pedestrian Tunnels
- Bus Stations and etc

## Construction


- One piece, fully sealed PC housing with white and opal finish.
- Stainless steel mounting clips

# Model & Technical Data

Model	EGE-TRF-P036-HL
Rated Supply V/ Frequency	220-240V 50-60Hz
Input Voltage	AC 100 ~ 240V
Power Rating	36W
Power Factor	0.9
THD	<15%
Surge Protection	4KV
Operating Temp	- 20° + 40°
Luminous Flux ±5%	4680LM
CRI	> 80 Ra
CCT	3000K / 4000K / 6500K
Beam Angle	120°
Fluorescent Equivalent	2 x T5 28W
Housing / Diffuser	Polycarbonate (PC) – white / opal
Dimensions / Weight	1195mm X 60mm x 50mm / 1.05 kg
In-coming wire length	195 mm
Rated Life	> 35,000Hrs
IP Rating	65
Certifications	CE EMC, LVD, RoHS

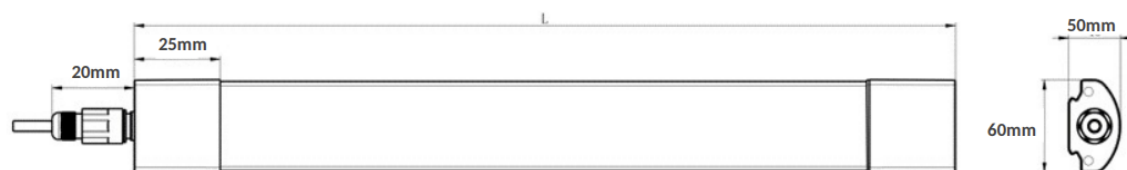

## Installation Methods

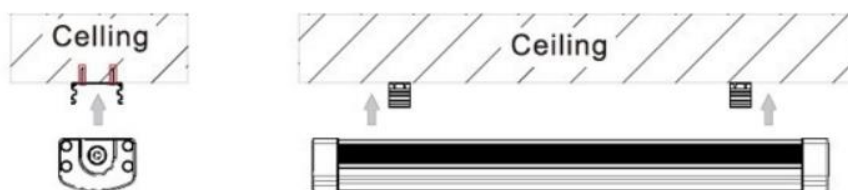

Remark: Detail and specification are current at the time of publication but may be changed without prior notice