

Durable Lighting Made for Industrial Safety



Hazardous Location LED Luminaire RL Series (Zone 1)



Authorized Agent :


EGE TECHNOLOGY SDN BHD (201201031202)

www.egetech.com.my

VENAS
Venas International Co., Ltd



RL2

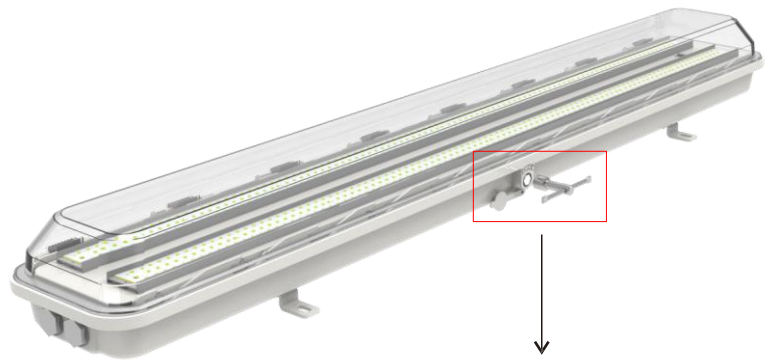

RL4



Interlock Kit



Product Description


The RL series linear vapor tight is designed for use in hazardous locations where flammable gases, vapors, or liquids might be present during normal facility operations. The combination of the style and design of new LED technology with the ruggedness and durability of a hazardous location fixture makes it ideal for retrofit of existing HPS/MH and offers higher efficacy for energy savings, lower maintenance costs and shorter payback. The optional battery backup system provides a minimum of 180 minutes operation after AC power is lost during an emergency.

Features

- UV stabilized, impact-resistant fiberglass reinforced polycarbonate lens
- Available in two and four foot lengths
- Safety interlock kit design
- Light distribution 120 degree
- 0-10V dimming
- Replaceable LED light strip, replaceable driver
- Water-proof, vapor-proof, dust-proof, and corrosion resistant, great reliability
- Emergency battery back-up optional

Compliance

ATEX Standard:

 Ex db eb mb IIC T6/T5 Gb Ex
tb IIIC T80°C/T95°C Db IP66

IECEX Standard:

Ex db eb mb IIC T6/T5 Gb Ex
tb IIIC T80°C/T95°C Db IP66

1200 hours salt spray

3G vibration

IK10



Application

- Power Plants
- Heavy Industrials Storage Facility
- Paper mills
- Wastewater Treatment Plants
- Loading Docks Platforms
- Offshore Environments
- Chemical Processing Facility
- Petrochemical Processing Facility
- Metallurgical Industry
- Coal Mine
- Food and Alcohol industry



Warranty

3-Year Standard Warranty for Battery Backup 5-
Year Standard Warranty for Fixture

50,000-hour LED lifespan based on IES LM-80 results and TM-21
calculations



Technical Parameter

• Electrical

| Specification | EX-**W RL2YZD-** | EX-**W RL4YZD-** |
|-------------------------|--|---|
| Power in Normal Mode | 15W / 20W / 30W | 20W / 30W / 35W / 40W / 45W / 50W |
| Input Voltage | AC120-277V | AC120-277V |
| Input Frequency | 50/60Hz | 50/60Hz |
| Emergency Function | Optional | Optional |
| Power in Emergency Mode | 15W / 20W / 30W / 35W | 20W / 30W / 35W / 40W / 45W / 50W / 55W |
| Power Factor | > 0.9 | > 0.9 |
| Surge Protection | 4kV | 4kV |
| Driver Efficiency | ≥90% | ≥90% |
| Dimming | Driver includes dimming control wiring for 0-10V dimming systems Requires separate 0-10V DC dimming circuit | |

• Optical

| Specification | EX-**W RL2YZD-** | EX-**W RL4YZD-** |
|----------------------------|--------------------------|---|
| Lumen Output (Normal Mode) | 1875lm / 2500lm / 3750lm | 2500lm / 3750lm / 4375lm / 5000lm / 5625lm / 6250lm |
| Luminous Efficacy | 125 lm/W | 125 lm/W |
| Beam Angle | 120° | 120° |
| CCT | 4000K/5000K/6000K | 4000K/5000K/6000K |
| CRI | Ra>70 | Ra>70 |


• Mechanical

| Specification | EX-**W RL2YZD-** | EX-**W RL4YZD-** |
|------------------|--|------------------|
| Housing Material | FRP (Fiber Reinforced Plastics) | |
| Lens Material | Transparent fiberglass-reinforced polycarbonate (standard) Diffuse fiberglass-reinforced polycarbonate (optional) | |
| Gasket | Silicone Rubber | |
| Color | Milky White | |
| Protection | IP66/IK10/3G Vibration/1200hrs salt spray | |
| Mounting | Ceiling, rope, and pole mount | |
| Cable entries | Normal Mode/ Emergency Mode: 4 x M20 (Side x1 open, Side x3 with stopping plugs) Note: M25, 3/4" NPT, or M25 can be achieved with an adapter. Customers needs to indicate which is required when placing an order. | |

• Environmental

| Specification | EX-**W RL2YZD-** | EX-**W RL4YZD-** |
|---------------------|--|------------------|
| Ambient Temperature | Normal Mode: -40°C to +45°C (T6/T80°C); -40°C to +60°C (T5/T95°C) Emergency Mode: -10°C to +45°C (T6/T80°C); -10°C to +60°C (T5/T95°C) | |

Product Dimensions

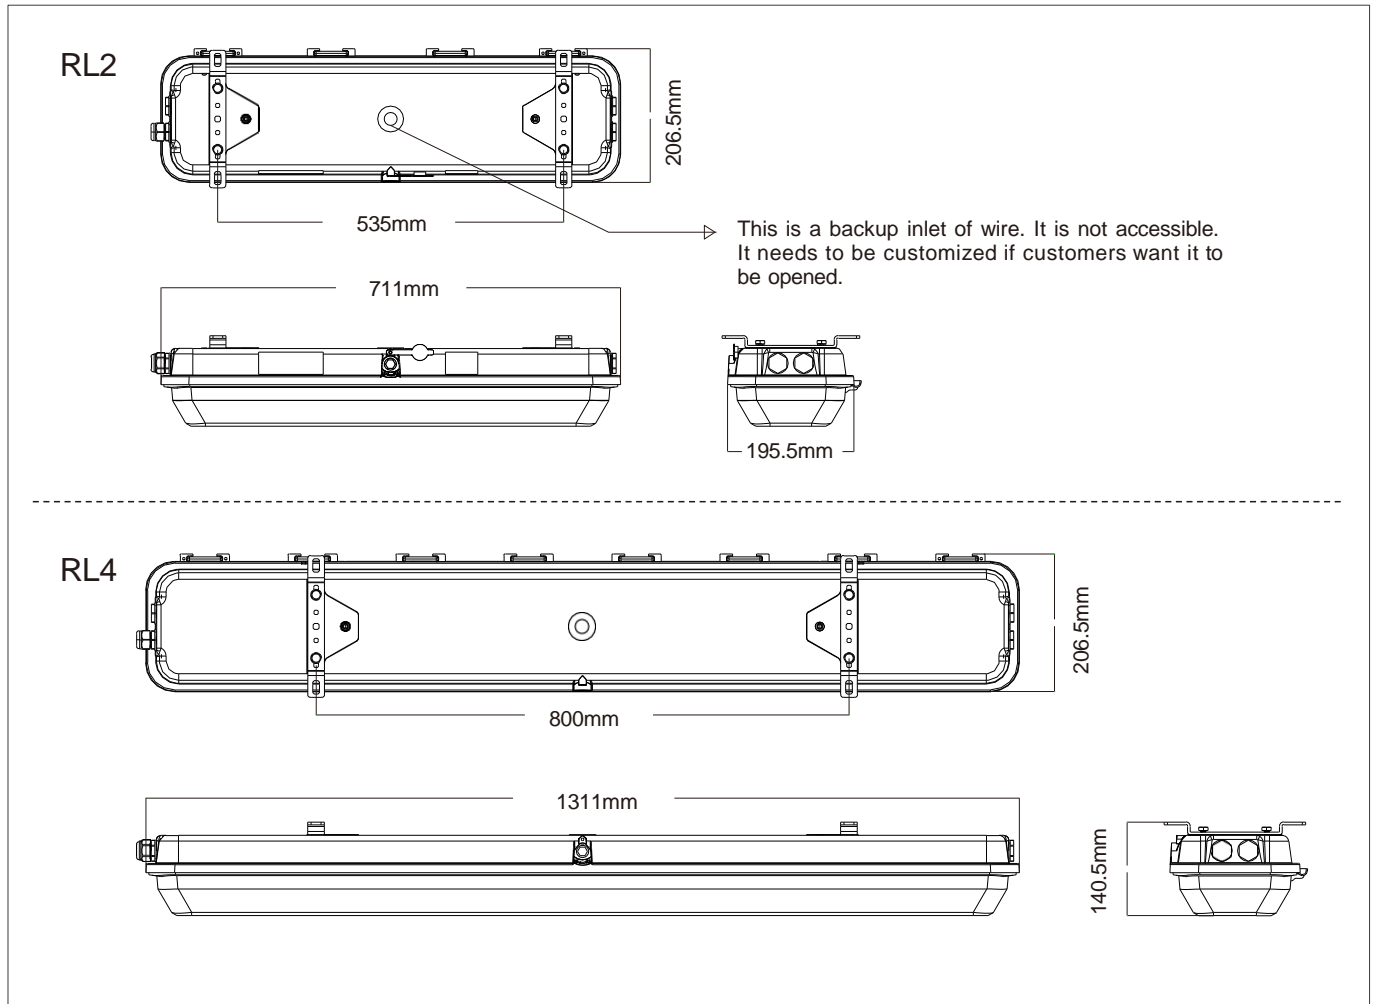

- Packing Information

| Model | Net Weight | Gross Weight | Quantity/Carton | Package Dimensions (LxWxH) |
|----------------|------------|--------------|-----------------|----------------------------|
| RL2 (standard) | 4 kg | 5 kg | 1 pc | 800x250x170mm |
| RL4 (standard) | 8 kg | 10.7 kg | 1 pc | 1400x250x175mm |

Mounting

| Options | Description | Kit (mm) | Installed |
|--|---|--------------------------------------|-----------|
| Ceiling Mount (Bracket Mount) | Provided with two stainless steel mounting kits welded at the back of Housing | Standard Mounting Kit (Included) | |
| Rope Pendant Mount | Provided with two stainless steel wire. Measured 1mm diameter. | | |
| Pole Mount | (1) 155° Pipe (2) Pipe Clamp bracket | | |

*Mounting screws not provided

**Ordered separately, field installed

Ordering Guide



| 1. Product Series | 2. Rated Power |
|-----------------------------|--|
| EX = Explosive-proof series | RL2 (Normal mode): 15W/20W/30W RL2 (Emergency mode): 15W/20W/30W/35W RL4 (Normal mode): 20W/30W/35W/40W/45W/50W RL4 (Emergency mode): 20W/30W/35W/40W/45W/50W/55W |

| 3. Design NO. | 4. Sensor | 5. Color Temperature | 6. Beam Angle | 7. Product Type |
|---------------|-----------|--|---------------|----------------------------------|
| RL2 RL4 | Y | 40 = 4000K 50 = 5000K 60 = 6000K | D = 120° | EM = Emergency Blank = Normal |