



Non Destructive Testing HI-TEMP Penetrant System

The Sherwin **DUBL-CHEK** HI-TEMP Penetrant System is designed to work at temperatures where ordinary penetrants are ineffective.

HI-TEMP Penetrant System can reduce waiting time and, if effectively used, can reduce inspection costs. At higher temperatures, up to 176.7°C, it enhances performance of the HI-TEMP Penetrant System ultimately developing stronger indications.


Callington has a full range of **DUBL-CHEK** NDT approved products that will enable you to carry out inspections with confidence.

HI-TEMP Penetrant System

- KO-17 Penetrant
- KO-19 Remover
- D-350 Developer

Applicable Specifications

- SAE AMS 2644 & QPL
- MIL-I-25135 Revisions E
- ASME Code NDT, Sec V

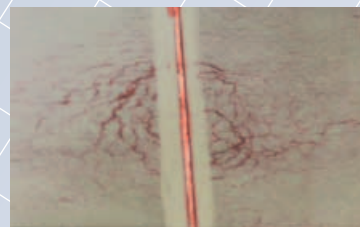

FIND OUT MORE

