

Air Impact Wrench



Model	Square Drive (inch)	Bolt Capacity (mm)	Max. Torque ft.lb(Nm)	Net Weight (kgs)	Length (mm)	Air Cons. (m³/min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec²)	Mechanism	Packing
GW-40L	1"	41	1,600(2,170)	11.00	530	0.60	1/2"	13	90	3.5	One Hammer	2pcs / 1.47cu-ft / G.W.: 26.9 kgs
GW-38L	1"	40	1,500(2,034)	12.50	570	0.58	3/8"	13	96	8.2	Pin Hammer	2pcs / 1.5cu-ft / G.W.: 27.5 kgs
GW-20	3/4"	25	500(680)	4.80	243	0.30	1/4"	8	92	3.2	One Hammer	4pcs / 1.36cu-ft / G.W.: 21 kgs
GW-19D	1/2"	16	400(543)	2.55	185	0.22	1/4"	6.5	98	4.6	Twin Hammer	10pcs / 1.3cu-ft / G.W.: 27 kgs
GW-10T	3/8"	13	190(258)	1.16	135	0.30	1/4"	6.5	90	2.9	Twin Hammer	16pcs / 1.22cu-ft / G.W.: 24.6 kgs
GW-867W	3/8"	10	150(203)	1.12	215	0.20	1/4"	6.5	90	5.4	Two Hammer	20pcs / 1.44cu-ft / G.W.: 24.5 kgs



GW-15BK



GW-24DK

GW-15BK		GW-24DK	
1 pc	1/2" Air Impact Wrench (GW-15B)	1 pc	3/4" Air Impact Wrench (GW-24D)
10 pcs	Socket 9-27 mm	8 pcs	Socket 26-38 mm
1 pc	Extension Bar	1 pc	Extension Bar
1 pc	Nipple	1 pc	Nipple
1 pc	Oil Pot	1 pc	Oil Pot
1 pc	Hex. Key Wrench	1 pc	Hex. Key Wrench
1 pc	Mini Oiler		
1 pc	Plastic Box	1 pc	Plastic Box
Packing	5 sets / 1.5cu-ft / G.W.: 22 kgs	Packing	2 sets / 1.25cu-ft / G.W.: 21.5 kgs

Air Ratchet Wrench



GP-856BK	
1 pc	1/2" Air Ratchet Wrench (GP-856B)
7 pcs	Socket
1 pc	Universal Joint
2 pcs	Adapter
1 pc	Nipper
3 pcs	Bit
1 pc	Oiler Pot
1 pc	Plastic Box
Packing	5 sets / 0.75cu-ft / G.W.: 13.5 kgs

Model	Square Drive (inch)	Max. Working Torque ft.lb(Nm)	Net Weight (kgs)	Length (mm)	Air Cons. (m³/min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec²)	Packing
GP-856B	1/2"	50(68)	0.97	254	0.11	1/4"	6.5	98	< 2.5	20pcs / 0.7cu-ft / G.W.: 24 kgs
GP-856AD	1/2"	50(68)	1.30	260	0.14	1/4"	6.5	87	< 2.5	20pcs / 1.7cu-ft / G.W.: 28 kgs
GP-854H	1/4"	30(40)	0.54	174	0.05	1/4"	6.5	72	< 2.5	20pcs / 0.64cu-ft / G.W.: 15.9 kgs

Air Angle Grinder



Model	Wheel Size (inch)	Spindle Thread	Max. Speed (rpm)	Horse Power (HP)	Net Weight (kgs)	Length (mm)	Air Cons. (m³/min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec²)	Packing
GP-832	4"	3/8"-24, M10	12,000	0.60	1.54	227	0.45	1/4"	8	80	< 2.5	10pcs / 1.45cu-ft / G.W.: 21 kgs
GP-832L	4"	3/8"-24, M10	12,000	0.60	1.69	226	0.45	1/4"	8	80	< 2.5	10pcs / 1.75cu-ft / G.W.: 24 kgs
GP-831	7"	5/8"-11, M14	7,000	1.0	3.04	227	0.59	3/8"	11	96	3.2	6pcs / 1.8cu-ft / G.W.: 24 kgs
GP-831LN	7"	5/8"-11, M14	7,000	1.0	3.05	331	0.59	3/8"	11	96	3.2	6pcs / 2.0cu-ft / G.W.: 25 kgs
GP-824CG	2"		15,000		0.66	170	0.20	1/4"	6.5	95	< 2.5	20pcs / 0.95cu-ft / G.W.: 15 kgs

Air Die Grinder



GP-824



GP-824EA



GP-824STA1



GP-8241



GP-8240

Model	Collet Size (inch)	Max. Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-824	1/4"(6mm)	22,000	0.70	168	0.22	1/4"	5	90	< 2.5	20pcs / 0.65cu-ft / G.W.: 15.5 kgs
GP-824EA	1/4"(6mm)	22,000	1.15	333	0.23	1/4"	5	99	< 2.5	16pcs / 0.75cu-ft / G.W.: 23.5 kgs
GP-824STA1	1/4"(6mm)	20,000	0.50	155	0.23	1/4"	5	87	< 2.5	12pcs / 0.80cu-ft / G.W.: 9.6 kgs
GP-8241	-	20,000	0.54	136	0.20	1/4"	5	83	< 2.5	20pcs / 1.9cu-ft / G.W.: 12 kgs
GP-8240	1/8"(3mm)	54,000	0.23	132	0.16	1/4"	5	84	< 2.5	20pcs / 1.25cu-ft / G.W.: 15 kgs

Air Angle Sander



GP-829



GP-823A



GP-827N



GP-926



GP-927



GPS-301S

Model	Pad Size (inch)	Spindle Thread (inch)	Diameter Orbital (mm)	Free Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-829	7"	5/8"-11, M14	-	4,500	2.25	370	0.39	1/4"	6.5	86	< 2.5	10pcs / 1.95cu-ft / G.W.: 24.5 kgs
GP-823A	2"	-	-	15,000	0.66	152	0.30	1/4"	5.0	85	< 2.5	20pcs / 0.95cu-ft / G.W.: 14 kgs
GP-827N	88x165 mm	-	1.8	8,000	1.80	170	0.42	1/4"	6.5	88	9.0	10pcs / 1.34cu-ft / G.W.: 20 kgs
GP-926	75x82 mm	-	1.2	15,000	0.50	140	0.15	1/4"	5.0	77	5.4	20pcs / 1.3cu-ft / G.W.: 18 kgs
GP-927	100x110 mm	-	1.6	20,000	0.55	130	0.20	1/4"	5.0	84	7.2	20pcs / 2.3cu-ft / G.W.: 20.5 kgs
GPS-301S	5", 6"	-	-	12,000	0.66	210	0.38	1/4"	6.5	85	< 2.5	6pcs / 1.8cu-ft / G.W.: 9 kgs

Air Jitterbug Sander

Air Random Orbital Sander

Air Angle Polisher



GP-930



GP-821P



GP-902



GP-902C

Air Straight Grinder



GP-917A

Straight Line Air Sander




GP-845A

Model	Belt Size (mm)	Pad Size (inch)	Spindle Thread (inch)	Free Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-930		7"	5/8"-11, M14	2,500	2.90	453	0.45	1/4"	6.5	90	< 2.5	6pcs / 1.65cu-ft / G.W.: 19 kgs
GP-821P		7"	5/8"-11	2,000	2.60	190	0.45	1/4"	6.5	81	< 2.5	8pcs / 1.2cu-ft / G.W.: 26.8 kgs
GP-902	10 x 330	-	-	16,000	0.78	265	0.40	1/4"	6.5	88	4.0	20pcs / 1.6cu-ft / G.W.: 16 kgs
GP-902C	60 x 260	-	-	7,000	1.65	245	0.45	1/4"	8.0	92	5.2	10pcs / 1.7cu-ft / G.W.: 17 kgs
GP-917A		Ø75xØ9.5x13	-	13,500	1.67	343	0.23	1/4"	8	87	< 2.5	10pcs / 0.90cu-ft / G.W.: 19.51 kgs

Model	Pad Size (inch)	Stroke Length (mm)	Stroke Speed (bpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-845A	70 x 445	25	2,100	3.00	450	0.35	1/4"	6.5	91	19	5pcs / 1.3cu-ft / G.W.: 15 kgs

Air Drill

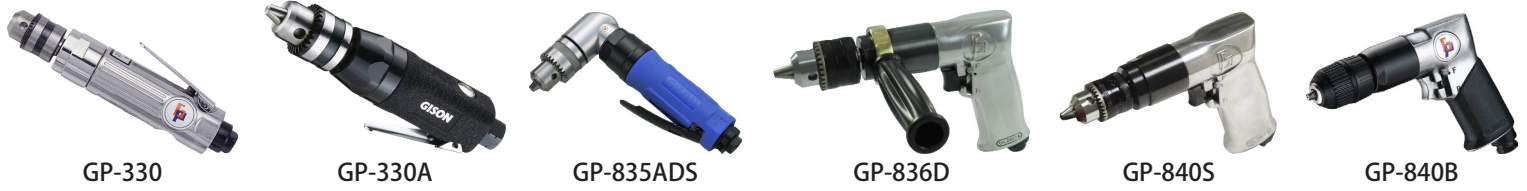

Model	Capacity (inch)	Max. Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-330	3/8"	2,500	1.00	225	0.08	1/4"	6.5	95	< 2.5	20pcs / 1.29cu-ft / G.W.: 21 kgs
GP-330A	1/4"	6,500	0.62	175	0.13	1/4"	6.5	85	< 2.5	20pcs / 0.5cu-ft / G.W.: 15 kgs
GP-835ADS	3/8"	2,200	1.17	200	0.08	1/4"	6.5	82	< 2.5	12pcs / 0.8cu-ft / G.W.: 15 kgs
GP-836D	1/2"	800	1.76	230	0.38	1/4"	6.5	82	< 2.5	10pcs / 0.92cu-ft / G.W.: 18 kgs
GP-840S	3/8"	1,800	1.20	177	0.38	1/4"	6.5	87	< 2.5	10pcs / 1.73cu-ft / G.W.: 13 kgs
GP-840B	3/8"	1,800	1.10	195	0.20	1/4"	10	90	< 2.5	10pcs / 0.85cu-ft / G.W.: 14 kgs

Air Screw Driver



Model	Capacity (mm)	Shank Size	Free Speed (rpm)	Max. Torque ft. Lb (Nm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-866	4.0-5.0	1/4"	8,000	26(35)	0.68	190	0.20	1/4"	6.5	86	< 2.5	20pcs / 0.70cu-ft / G.W.: 15.5 kgs
GP-866	3.0-4.0	1/4"	1,500	2.2(3)	0.65	228	0.12	1/4"	5.0	83	< 2.5	20pcs / 1.10cu-ft / G.W.: 14 kgs
GP-801LA	5.0-6.0	1/4"	10,000	26(35)	0.88	140	0.20	1/4"	6.5	90	< 2.5	15pcs / 1.30cu-ft / G.W.: 16 kgs
GP-802L90	5.0-6.0	1/4"	1,600	3.0(4)	0.90	230	0.16	1/4"	5.0	80	< 2.5	20pcs / 1.40cu-ft / G.W.: 19 kgs
GP-861J1	8	1/4"	800	9.5(13)	1.50	230	0.23	1/4"	5.0	92	< 2.5	10pcs / 0.92cu-ft / G.W.: 15 kgs

Air Hammer



Model	Stroke Speed (bpm)	Piston Stroke (mm)	Shank Size (mm)		Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
			∅	□								
GP-190	3,200	67	-	-	1.60	190	0.11	1/4"	6.5	99	13.7	10pcs / 0.85cu-ft / G.W.: 20 kgs
GP-923	7,200	15	-	-	1.90	480	0.30	1/4"	8	90	35.1	10pcs / 1.5cu-ft / G.W.: 25.5 kgs
GPB-30S	1,000	40	30	-	24.60	590	1.19	3/4"	3/4"	-	-	1pc / 0.9cu-ft / G.W.: 26 kgs
GP-891H	3,600	50	14.95	12.80	2.80	254	0.35	3/8"	8	92	10.4	6pcs / 0.8cu-ft / G.W.: 21 kgs
GP-892H	2,500	25.4	17.30	14.50	6.50	388	0.80	3/8"	8	105	11.0	2pcs / 0.75cu-ft / G.W.: 15.8 kgs


Air Chipping Hammer

Air Needle Scaler & Flux Chipper



Model	Needle (mmx pc)	Stroke Speed (bpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-851A	3 x 19	3,700	2.60	375	0.16	1/4"	8	106	8.7	6pcs / 0.4cu-ft / G.W.: 17.5 kgs
GP-851B	3 x 19	3,700	2.60	250	0.16	1/4"	8	106	8.7	6pcs / 1.3cu-ft / G.W.: 19 kgs
GP-851G	3 x 23	3,800	2.70	348	0.22	3/8"	8	92	4.7	6pcs / 1.3cu-ft / G.W.: 19 kgs
GP-851I	3 x 12 Flux Chipper	4,800	1.50	290	0.12	1/4"	8	91	14.5	10pcs / 0.5cu-ft / G.W.: 16 kgs
GP-851M	Flux Chipper	4,000	1.40	280	0.12	1/4"	6.5	91	14.5	10pcs / 0.5cu-ft / G.W.: 17 kgs

Air Hydraulic Riveter Air Stapler

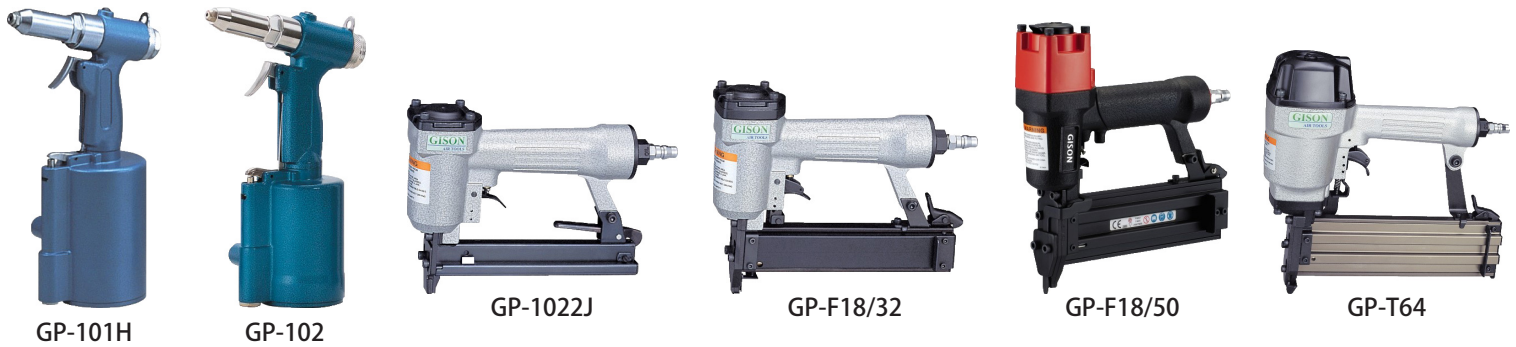

Model	Traction Power (kg. f)	Stroke Length (mm)	Rivet Nut Dia. (mm)	Net Weight (kgs)	Height (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Packing
GP-101H	1,700	18	2.4, 3.2, 4.0, 4.8, 6.0, 6.4	1.75	298	0.15	1/4"	6.5	6pcs / 2.55cu-ft / G.W.: 12.5 kgs
GP-102	1,045	16	2.4, 3.2, 4.0, 4.8	1.56	270	0.09	1/4"	6.5	10pcs / 2.55cu-ft / G.W.: 19.5 kgs

Model	Wire Dia. (gauge)	Crown (mm)	Staple / Nail Size (mm)	Net Weight (kgs)	Tool Size (mm)	Load Capacity (pc)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-1022J	20	11.2	1.20 x 0.60 x (10-22)	1.15	250 x 170 x 55	100	97	12.6	10pcs / 1.5cu-ft / G.W.: 14.5 kgs
GP-F18/32	18	-	1.25 x 1.00 x (10-32)	1.20	250 x 197 x 55	100	98	2.7	10pcs / 1.5cu-ft / G.W.: 14.5 kgs
GP-F18/50	18	-	1.25 x 1.00 x (10-50)	1.45	250 x 235 x 55	100	95	1.8	10pcs / 1.7cu-ft / G.W.: 17 kgs
GP-T64	14	-	2.20 x 2.20 x (18-64)	3.40	370 x 330 x 105	80	100	7.9	5pcs / 2.7cu-ft / G.W.: 17.9 kgs

Air Engraving Scribe Pen



Air Window Seal Cutter



Air Body Saw



Model	Stroke Length (mm)	Stroke Speed (bpm)	Oscillation (Per min)	Net Weight (kgs)	Head Height (mm)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-330	1.2	34,000	-	0.24	-	160	0.05	1/4"	6.5	75	2.9	20pcs / 1.74cu-ft / G.W.: 7 kgs
GP-931	-	-	20,000	1.00	70.00	-	0.25	1/4"	6.5	82	3.76	10pcs / 1.4cu-ft / G.W.: 15 kgs

Model	Type	Capacity (mm)	Stroke Speed (bpm)	Piston Stroke (mm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-848B	Saw	1.6	9,000	10	0.60	276	0.25	1/4"	6.5	87	15.0	20pcs / 0.75cu-ft / G.W.: 14 kgs
GP-848F1	Saw & File	1.2	5,000	10	1.10	230	0.23	1/4"	6.5	80	16.5	10pcs / 1.4cu-ft / G.W.: 14 kgs
GP-948A	File	-	21,000	1	0.57	202	0.12	1/4"	9.5	68	< 2.5	20pcs / 1.85cu-ft / G.W.: 16 kgs

Air Nipper



GP-005A



GP-020



GP-838C



GP-838STN

Air Cutter



GP-847N

Air Tire Buffer



GP-824TB

Model	Capacity (mm)		Size (mm)	Max Speed (mm)	Standard Blade		Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Packing
	Steel	Aluminum			Wire	Plastic						
GP-005A	-	-	20Ø x 126	-	S20	-	0.19	-	-	1/4"	5.0	28pcs / 0.6cu-ft / G.W.: 5.83 kgs
GP-020	-	-	45Ø x 17	-	S5	FD-6	0.59	-	-	1/4"	6.5	35pcs / 1.9cu-ft / G.W.: 21.8 kgs
GP-838C	1.2	1.6	-	2,100	-	-	1.33	215	0.18	1/4"	6.5	10pcs / 0.9cu-ft / G.W.: 13.9 kgs
GP-838STN	1.2	1.6	-	2,600	-	-	0.98	188	0.08	1/4"	6.5	12pcs / 0.8cu-ft / G.W.: 14 kgs
GP-847N	-	-	75	20,000	-	-	0.92	190	0.22	1/4"	6.5	20pcs / 0.8cu-ft / G.W.: 14 kgs
GP-824TB	-	-	65	2,500	-	-	0.89	205	0.22	1/4"	6.5	10pcs / 1.3cu-ft / G.W.: 12 kgs

Air Caulking Gun



GP-853

Air Grease Gun



GP-850N

Air Spray Gun



GYD-71



GYD-77



GYD-71G

Model	Capacity Bulk (cc)	Capacity Cartridge (oz)	Specification	Net Weight (kgs)	Length (mm)	Air Inlet (inch)	Packing
GP-853	-	9	Steel Tube No dropping	1.15	310	-	10pcs / 1.34cu-ft / G.W.: 14 kgs
GP-850N	400	14		1.15	-	1/4"	10pcs / 1.53cu-ft / G.W.: 16 kgs

Model	Type	Fluid Tip (mm) I.D.	Cup Capacity (Liter)	Optional Nozzle (mm)	Net Weight (kgs)	Height (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Fluid Inlet (inch)	Packing
GYD-71	Suction	1.5	0.70	1.30	0.75	250	0.32	1/4"	6.5	1/4	10pcs / 1.6cu-ft / G.W.: 13 kgs
GYD-77	Suction	2.0	1.00	1.5, 2.5	0.95	290	0.34	1/4"	6.5	3/8	10pcs / 1.7cu-ft / G.W.: 13 kgs
GYD-71G	Gravity	1.5	0.40	1.30	0.75	270	0.32	1/4"	6.5	1/4	20pcs / 2.0cu-ft / G.W.: 18 kgs

Suction Lifter



GAS-617CM



GAS-617



GAS-618D



GAS-617G



GAS-619



GAS-620

GAS-617CM 30 kgs / 100 mm GAS-617CS 20 kgs / 75 mm	GAS-617 160 kgs / 110 mm Contains: 2pcs GAS-617P Ratchet tie 123-462 mm	GAS-618D 80 kgs / 117 mm Dual cap Movable heads, Especially desing for curved surfaces (less than 15")	GAS-617G 40 kgs / 123 mm Dual cap Top plate with chromium. Movable heads, Especially Desing for curved surfaces (less than 15")	GAS-619 80 kgs / 123 mm Three-grip fix style. Top plate with chromium.	GAS-620 100 kgs / 123 mm Four-grip fix style. Top plate with chromium.
---	--	---	---	---	---

Air Blow Gun



BG-4N / 10N	BH-4L-R
Material: Nylon Fiber M with brass inlet. Durable under high Pressure working	Function: Air Flow adjustable. Durable under high Pressure working
Packing: 20sets / 1.6cu-ft / G.W.: 11 kgs	Packing: 60sets / 2.1cu-ft / G.W.: 13 kgs

Air Hose Reel



GP-RB02/RB02B GP-RB01A/B GP-RB03F/G GP-RB03A/B/C/D GP-815H/816H/817H GP-815H1/816H1/817H1

F.R.L. Regulator



Model	Capacity (kg)	Hose size (mm)	Hose Length (M)	Inlet (inch)	Net Weight (kgs)	Case Size (mm)	Working Pressure psi (kg/cm ²)	Break Pressure psi (kg/cm ²)	Packing
GP-RB02	0.6 – 1.5	5 x 8	1.2	1/4"	0.86	205 x 155 x 105	100 (7)	400 (28)	10pcs / 1.4cu-ft / G.W.: 11 kgs
GP-RB02B	0.6 – 1.5	5 x 8	2.0	1/4"	0.90	205 x 155 x 105	100 (7)	400 (28)	10pcs / 1.4cu-ft / G.W.: 11 kgs
GP-RB01A	-	5 x 8	7.5	1/4"	1.4	240 x 215 x 95	100 (7)	350 (24)	10pcs / 2.0cu-ft / G.W.: 20 kgs
GP-RB01B	-	6.5 x 9.5	6.0	1/4"	1.4	240 x 215 x 95	100 (7)	350 (24)	10pcs / 2.0cu-ft / G.W.: 20 kgs
GP-RB03F	-	6.5 x 10	10	1/4"	2.5	290 x 285 x 150	200 (15)	725 (50)	6pcs / 3.0cu-ft / G.W.: 20 kgs
GP-RB03G	-	8 x 12	8	1/4"	3.0	290 x 285 x 150	220 (15)	725 (50)	6pcs / 3.0cu-ft / G.W.: 20 kgs
GP-RB03A	-	6.5 x 10	30	1/4"	7.5	350 x 290 x 390	220 (15)	870 (60)	2pcs / 2.9cu-ft / G.W.: 17 kgs
GP-RB03B	-	6.5 x 10	50	1/4"	9.0	350 x 290 x 390	220 (15)	870 (60)	2pcs / 2.9cu-ft / G.W.: 20 kgs
GP-RB03C	-	8.5 x 12.5	30	1/4"	8.0	350 x 290 x 390	220 (15)	870 (60)	2pcs / 2.9cu-ft / G.W.: 17 kgs
GP-RB03D	-	8.5 x 12.5	40	1/4"	9.0	350 x 290 x 390	220 (15)	870 (60)	2pcs / 2.9cu-ft / G.W.: 18 kgs

Model	Port Size (inch) pt / npt	Max Flow (m ³ /min)	Construction unit			Packing
			Filter	Regulator	Lubricator	
GP-815H	1/4"	1.75	GP-815HA	GP-815HB	GP-815HC	10pcs / 2.2cu-ft / G.W.: 22 kgs
GP-816H	3/8"	2.50	GP-816HA	GP-816HB	GP-816HC	10pcs / 2.2cu-ft / G.W.: 22 kgs
GP-817H	1/2"	3.00	GP-817HA	GP-817HB	GP-817HC	10pcs / 2.2cu-ft / G.W.: 22 kgs
GP-815H1	1/4"	1.75	GP-815HAB			12pcs / 1.7cu-ft / G.W.: 20 kgs
GP-816H1	3/8"	2.50	GP-816HAB			12pcs / 1.7cu-ft / G.W.: 20 kgs
GP-817H1	1/2"	3.00	GP-817HAB			12pcs / 1.7cu-ft / G.W.: 20 kgs

GISON Quick Change Couplers (1/4", 3/8", 1/2")

