




T-CHARGE 12 EVO 6V/12V

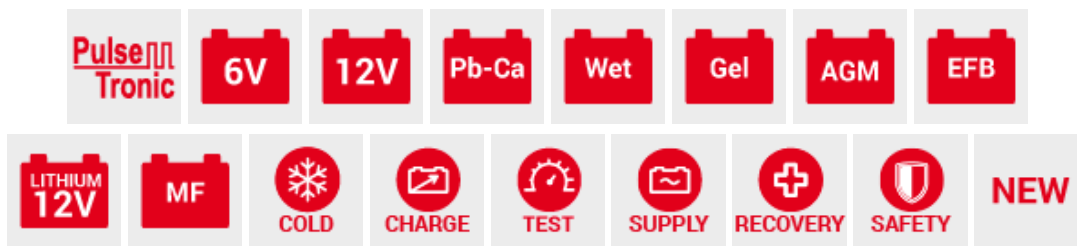

Overview

T-CHARGE 12 EVO 6V/12V

cod. 807578

Multi-functional electronic battery charger, trickle charger and tester for WET, GEL, AGM, MF, PbCa, EFB, Li 6/12V batteries with LCD screen.

Charging and maintenance programs in Pulse Tronic dedicated to the technology of the selected battery. Advanced function for charging and maintenance of batteries at low temperatures. Activation of the RECOVERY function enables resetting of sulphated batteries. Tests the vehicle alternator and battery. Continuous and reliable power supply source during battery changes. Simplified use and immediate display of the parameters thanks to the LCD screen.

Features:

- Automatic loading and maintenance in Pulse Tronic based on the technology of the selected battery;
- COLD function for charging and maintenance of batteries at low temperatures;
- RECOVERY function to recover sulphated batteries;
- TEST function for battery, start-up and alternator;
- SUPPLY function for stable power supply during battery changing;
- LCD screen;

Protection against overcharging, short circuit and polarity reversal.

Complete with cable with clamps and cable with eyelets.



1 PH 230V



BOAT



CE MARKING



MOTORCYCLE



TRACTOR



EAC CERTIFICATION



CAR



VAN

Technical data



T-CHARGE 12 EVO 6V/12V

CODE	CODE 807578	A_{EFF}	EFFECTIVE CHARGING CURRENT 1 / 4 A	W H L	DIMENSIONS 17 - 6,5 - 3,5 cm
V_{1PH}	SINGLE PHASE MAINS VOLTAGE 230 V	A_{EN}	RATED CHARGE CURR. EN60335-2-29 1 / 4 A	kg	WEIGHT 0,6 kg
F	MAINS FREQUENCY 50 / 60 Hz	C_{MIN}	MIN. RATED REFERENCE CAPACITY 2 Ah	BAR CODE	EAN CODE 800489798199 4
P	CHARGING ABSORBED POWER 55 W	C_{MAX}	MAX RATED REFERENCE CAPACITY 70 Ah	P	PIECES/PALLET 432 pz/pallet
B	CHARGING VOLTAGE 6 / 12 V	S	ADJUSTMENT POSITIONS AUTOMATIC	P	PIECES/PALLET - B 288 pz/pallet - B

T-CHARGE 12 EVO

The power of a battery charger, the accuracy of a tester

La potenza di un caricabatterie, la precisione di un tester

Battery charger, maintainer and tester: three products in one! T-Charge 12 EVO is the complete and advanced check-up to give new life to any battery.

Caricabatteria, mantentore di carica e tester: tre prodotti in uno! T-Charge 12 EVO è il check-up completo e avanzato per ridare vita a ogni tipo di batteria.

Optimized programs for different types of batteries
Programmi ottimizzati per i diversi tipi di batterie

Recovery Function
Funzione Recovery



Pulse
Tronic

Alternator and battery Test function
Funzione Test per alternatore e batteria

Supply function to keep power on during battery change
Funzione Supply per avere energia durante il cambio batteria

Vehicles	Volts	Batteries	Special functions



Smart technology for superior results

Tecnologia smart per risultati superiori
Automatic charging and maintenance in Pulse Tronic, for all kinds of batteries.
Carica e mantenimento automatici in Pulse Tronic per tutti i tipi di batterie.

CHARGE
MAINTAIN



The right power, always

Sempre la giusta energia
Customized charging programs according to the battery technology, lithium batteries included.

Programmi dedicati di carica in base alla tecnologia della batteria, incluse batterie al Lito.

CUSTOM
CHARGE



Best performance even below zero

Massime prestazioni anche sotto zero
Battery charging and maintenance, perfect for low temperatures.

Carica e mantenimento delle batterie ideali per le basse temperature.

COLD



New life to old batteries

Nuova vita alle vecchie batterie
Pulse process to recover sulfated batteries.
Processo ad impulsi per il recupero di batterie solfatate.

RECOVERY



Full operation in any condition

Piena operatività in ogni condizione
Continuous and reliable power supply during battery changes.
Alimentazione continua e affidabile durante i cambi batteria.

SUPPLY



Everything always under control

Tutto sempre sotto controllo

TEST



Check of the correct functioning of the vehicle alternator circuit.

ALTERNATOR



Check of battery starting capacity (CCA).
Verifica della capacità di avviamento della batteria (CCA).

START



Measure of battery charging status.
Misura dello stato di carica della batteria.

VOLT

T-CHARGE 12

Volts

6V 12V

Batteries

Wet Gel MF AGM Pb-Ca EFB

CHARGE & MAINTAIN

CHARGE

AGM

MAINTAIN

COLD

RECOVERY

SAFETY

FULL SAFE

ENERGY SAVER

T-CHARGE 12 EVO

Volts

6V 12V

Batteries

Wet Gel MF AGM Pb-Ca EFB Li

CHARGE & MAINTAIN

CHARGE

CUSTOM CHARGE

MAINTAIN

COLD

TEST

START

ALTERNATOR

VOLT

RECOVERY

SUPPLY

SAFETY

FULL SAFE

ENERGY SAVER

Technical data

	CODE	V _{PH} V (50-60Hz)	V	A _{EFF} A	A _{EN} A	C _{MIN/MAX} Ah 15 h	W ^H / _L mm	kg
T-Charge 12	807567	230 1 ph	6/12	4 (12V) 1 (6V)	4 (12V) 1 (6V)	2/70	170 L 65 W 35 H	0,6
T-Charge 12 EVO	807578	230 1 ph	6/12	4 (12V) 1 (6V)	4 (12V) 1 (6V)	2/70	170 L 65 W 35 H	0,6

Accessories

Accessori



Interchangeable connector
Connettore intercambiabile



Clamps
Pinze
cod. 802901



Eyelets
Occhielli
M6 cod. 802986 - M8 cod. 804037



Car-motorbike 12V connector
Connettore auto-moto 12V
cod. 804038