

AquaSensors AnalogPlus Toroidal Conductivity Sensor

For challenging process applications

Thermo Scientific™ AquaSensors™ AnalogPlus™ Toroidal Conductivity Sensor

Key features

- Toroidal conductivity sensor designed for continuous use in the most demanding industrial applications
- 0 to 2 S/cm measurement range with 1 μ S/cm resolution
- Offered in PEEK™ for high temperature/sanitary applications
- Offered in CPVC for wide measurement range at the price of many two-electrode sensors
- For use with Thermo Scientific™ AV88 and AquaPro™ Universal Analyzers

Markets and applications

- Chemical production
- Metal finishing
- Semiconductors
- Pulp and paper
- Food processing
- Pharmaceuticals



- Chemical concentration control
- Leak detection in heat exchangers
- Acid and caustic dilution
- Wet chemical scrubbers
- Cooling towers
- Plating bath control
- Parts cleaning and rinsing
- Pickling bath control
- Waste streams
- Black, white, or green liquor
- Pulp bleaching
- Vegetable rinsing

AquaSensors AnalogPlus Toroidal Conductivity Sensor



Engineering specifications

- 1. The toroidal conductivity sensor has a diameter of 1.5 inches. It exhibits 1 µS/cm resolution and measures up to 2 S/cm at 25°C. The sensor body has a tightly controlled wall thickness to help prevent cracking with heating and cooling cycles.
- 2. Hex-shaped wrench flats to facilitate mounting and are constructed of a material with exceptional chemical resistance and mechanical strength. This material enables the sensor to be installed in metal fittings without leakage usually caused by heating and cooling cycles when dissimilar materials are threaded together.
- 3. The sensor has ¾ inch NPT threads to mount into a standard 2 inch union mounting, 2 inch ball valve or immersion hardware assembly. Tri-clamp sanitary mounting also available.
- 4. The built-in electronics of the sensor completely encapsulated and O-ring sealed for protection from moisture and humidity.
- 5. The sensor has an integral temperature sensor to automatically compensate measured values for changes in process temperature.




AquaSensors AV88 Universal Analyzer
Connects to any AnalogPlus sensor using plug-in module. 2 line display and 7 key navigation. Data reporting with up to 2 current outputs. 2 Form C relays.

Product specifications

AquaSensors AnalogPlus Toroidal Conductivity Sensor	
Measurement system performance*	Range: 0 to 2,000,000 µS/cm (2 S/cm)
	Resolution: 4 or 5 significant digits
	Accuracy: 0.1% of reading
Operational equipment	PEEK sensor head
	Temperature range: -5°C to 200°C
	Maximum pressure: 200 psig @ 100°C
	Maximum flow rate: 10 ft/second
	CPVC sensor head
	Temperature range: -5°C to 75°C
	Maximum pressure: 100 psig @ 75°C
	Maximum flow rate: 10 ft/second
Construction	Sensor Material: PEEK or CPVC
	Temperature element: PT1000
	O-rings: Viton™
	Weight: 0.5 lbs. (PEEK or CPVC)
Approvals	Meets CE requirements for heavy industrial use

*Note: Typical at 25°C with 20 feet of cable

Engineering drawing

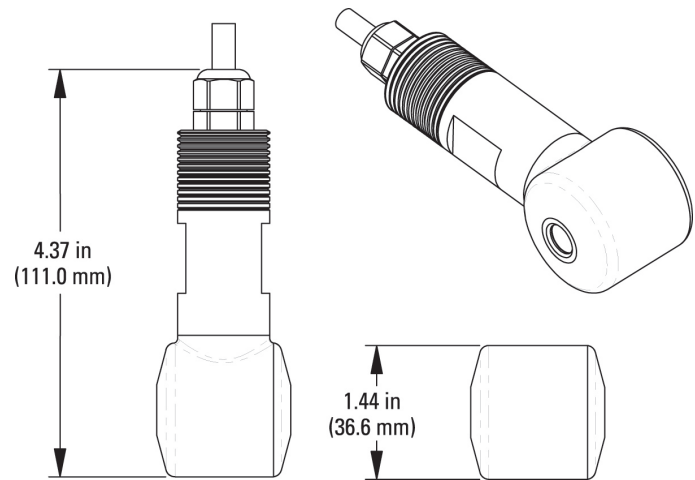

AquaSensors AnalogPlus Toroidal Conductivity Sensor

Global support

With experience that comes from supporting our customers for over 35 years throughout the world, our water quality specialists and customer support teams offer a quick, thorough and professional response to any problem encountered.

Focus on user benefits

We work closely with you to define your needs, and ensure you are using the monitor in a way that helps improve your bottom line. For more information, contact your local water quality specialists or visit: thermofisher.com/water

Ordering information

AquaSensors AnalogPlus Sensor

Description	Cat. No.		
Conductivity sensor	ST-b-u-m		
Body material (b)	2	=	CPVC
	3	=	PEEK
Cable length (u)	1	=	10 feet
	3	=	30 feet
Mounting options (m)	B	=	2" sanitary tri-clamp
	C	=	¾" NPT

Accessories ordering information

AquaSensors AnalogPlus Sensor accessories

Description	Cat. No.
Conductivity solutions - 500 mL bottles	
1000 µS/cm calibration solution	SOL1000
2000 µS/cm calibration solution	SOL2000
5000 µS/cm calibration solution	SOL5000
Mounting hardware	
2.0 Inch union mounting, CPVC	MH3032-T
1 inch immersion mounting with junction box, PVC (7 foot extension is standard)	MH3083-T

Consult factory for additional configurations and accessories

Australia: (613) 9757-4300 **In Australia:** (1300) 735-295 **China:** (86) 21-6865-4588
Germany: (49) 6184-90-6321 **India:** (91) 22-4157-8800 **Japan:** (81) 045-453-9175
North America: 1-978-232-6000 Toll Free: 1-800-225-1480 **Singapore:** (65) 6778-6876

Find out more at thermofisher.com/water

For Research Use Only. Not for use in diagnostic procedures. © 2018 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific and its subsidiaries unless otherwise specified. Viton is a registered trademark of The Chemours Company FC. PEEK is a trademark of Victrex USA, Inc. **S-ASAPTORO-E 0718 Rev C**

ThermoFisher
SCIENTIFIC