

Check Valve

Cast Iron Lift Type PN 16

Interflow™

flanged ends to DIN PN 16 face to face to DIN 3202

Straight pattern:

- Stainless steel trim
- Bronze trim

Application

These check valves are for horizontal pipelines only cold and hot water, steam, oil, air etc

Pressure/ Temperature rating



16 bar - 120 °C | 13 bar - 200 °C

Material

Part	material according to DIN		Ws. no.
body and cover	Cast iron	GG-25	0.6025
disc	stainless steel	X20Cr13	1.4021
seat	stainless steel	X20Cr13	1.4021
disc spring	stainless steel	X12CrNi177	1.4310


On Request

- Fig. 77 all of stainless steel

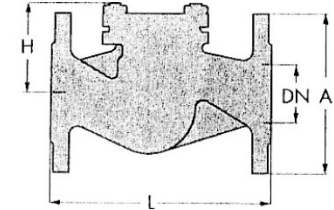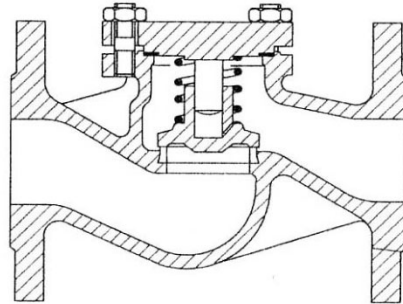

Dimensions (mm)

fig. 77/101				
DN	A	L	wt	
			(kg)	
15	95	130	2.4	
20	105	150	3	
25	115	160	3.8	
32	140	180	5.7	
40	150	200	7.4	
50	165	230	10.3	
65	185	290	15.2	
80	200	310	20.4	
100	220	350	31	
125	250	400	49	
150	285	480	69	
175	315	550	101	
200	340	600	132	

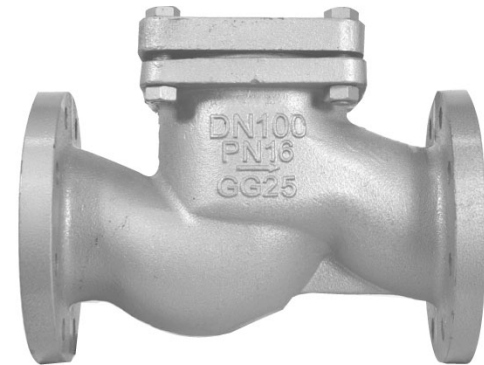

Product Code CC02