


FRONT

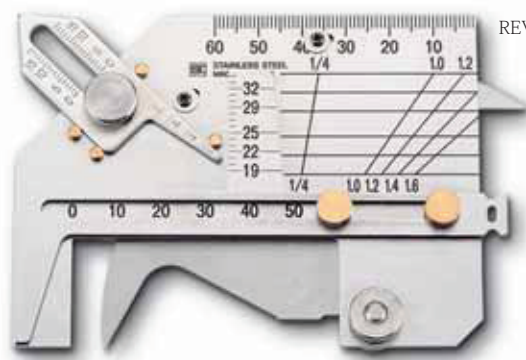

REVERSE

**USE**

- For a wide variety of welding measurements
- Undercut depth/ Groove angle/ Inconsistent level
- Height of fillet weld & bead weld/ Throat thickness of fillet
- Root opening/ Plate thickness/ External diameter of circular workpiece/ Width of bead weld

**MATERIAL**


- Stainless steel (SUS420J2)

**FEATURES**

- Additional functions for measurement of
  - external diameter of circular workpiece
  - swelling of pressure welded reinforcing iron
  - width of bead weld
- Bead stride width: 53mm
- Bevel angle range: 0-70°
- Higher accuracy undercut measurement function

**DIMENSIONS**

Units: mm

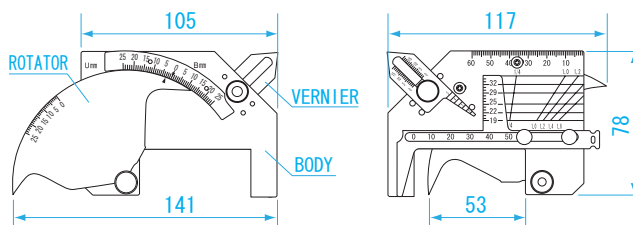

BLOCK GAUGES

PIN GAUGES




PIN VISE

PIN GAUGE ACCESSORIES

Additional functions

Provides quick way to measure the diameter of welded rebar to insure proper dimensions of weld seam.

Scale marked for material diameter ( $\phi$  19, 20, 25, 29, 32) corresponding to various rebar diameters, and amount of expansion (1/4, 1.0~1.6). You can quickly find the ratio by reading the intersection of the two scale lines.

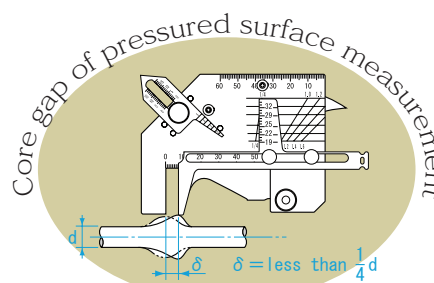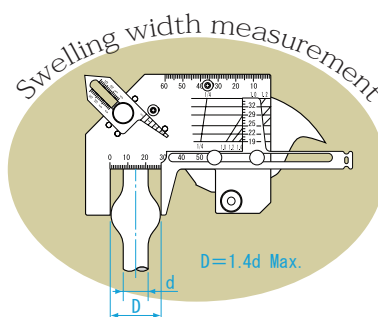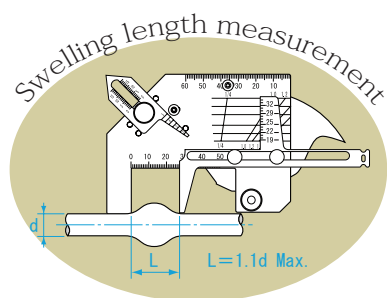

GAUGES

THREAD GAUGES

PLUG GAUGES

RING GAUGES

THICKNESS GAUGES

TAPER GAUGES

WELDING GAUGES

OTHER GAUGES

Order No.	Model No.	Rebar diameter (mm)	Expansion	Weight
007515	WGU-9M	$\phi$ 19 ~ 35	1/4, 1.0 ~ 1.6	190g