
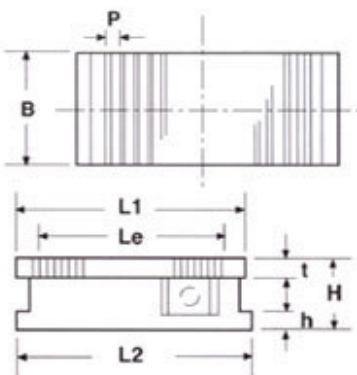


MATCHLING TOOLING

34055 POWERFUL ANGULAR PERMANENT MAGNETIC CHUCK

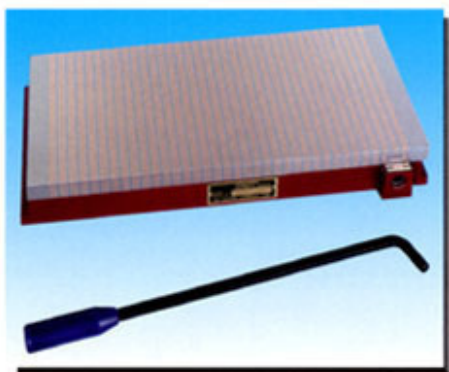

APPLICATION :
Suitable for heavy and light grinding. It can also be used in liquid.

FEATURES :

1. While turning magnetic force ON/OFF, the flat face's accuracy of magnetic force surface doesn't change and can keep high precision processing surface.
2. Wide application to thin and thick work pieces.
3. Brass welding protects faceplate from coolant corrosion.
4. Water-proof property enables face plate & machine body to be used in liquid.
5. Attraction: 14 kg/cm².

Unit:mm


Order No.	Model	Nominal Dimension	Face Plate			Pole pitch	Rotary Base		Height	N.W. (kg)
			B	L1	Le	P	L2	h	H	
34055-05	HMT-407A	100x175	100	175	125	11.2(1.6+2+1.6+6)	187	13	63	7.3
34055-10	HMT-510A	125x250	125	250	200	11.2(1.6+2+1.6+6)	262	13	63	10.4
34055-15	HMT-612A	150x300	150	300	246	11.2(1.6+2+1.6+6)	312	13	63	15.1
34055-20	HMT-614A	150x350	150	350	296	11.2(1.6+2+1.6+6)	362	13	63	17.4
34055-25	HMT-618A	150x450	150	450	396	11.2(1.6+2+1.6+6)	462	13	63	20.1
34055-30	HMT-816A	200x400	200	400	346	11.2(1.6+2+1.6+6)	412	13	63	26.0
34055-35	HMT-818A	200x450	200	450	390	11.2(1.6+2+1.6+6)	462	13	63	30.1
34055-40	HMT-820A	200x500	200	500	446	11.2(1.6+2+1.6+6)	512	13	63	34.7
34055-45	HMT-1020A	250x500	250	500	446	11.2(1.6+2+1.6+6)	512	13	63	45.6

34058 PERMANENT MAGNETIC CHUCK



FEATURES:

- Provides powerful holding power for the thinner work piece as well as for the thicker work piece.
- This is the thinnest profile chuck of it's type, with height of only 50mm.
- Specially designed to minimize face plate precision variation when switched on, providing a higher degree of accuracy on your finished work piece.

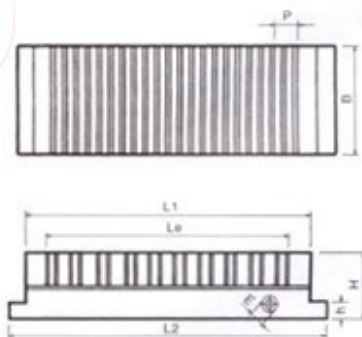

APPLICATION:
This is our latest permanent magnetic chuck designed for a wide range of applications. It's increased attractive forces strengthen the holding power for use on electro discharge machines, in milling operations, as well as in grinding operations.

Unit:mm

Order No.	Model	CHUCKING FACE			POLE PITCH	CHUCK MOUNTING PART			H	HEXAGONAL HANDLE HOLE E	N. W. (kg)
		B	L1	Le	P	B	L2	h			
34058-05	RMT-1018	100	175	137	14.5 (1.5+3.2+1.5+8.3)	100	195	15	50	8	17
34058-10	RMT-1025	100	250	210	14.5 (1.5+3.2+1.5+8.3)	100	270	15	50	8	9.5
34058-15	RMT-1030	100	300	253	14.5 (1.5+3.2+1.5+8.3)	100	320	15	50	8	11.5
34058-20	RMT-1325	125	250	210	14.5 (1.5+3.2+1.5+8.3)	125	270	15	50	8	12
34058-25	RMT-1515	150	150	108	14.5 (1.5+3.2+1.5+8.3)	150	170	15	50	8	8.5
34058-30	RMT-1530	150	300	253	14.5 (1.5+3.2+1.5+8.3)	150	320	15	50	8	17
34058-35	RMT-1535	150	350	296	14.5 (1.5+3.2+1.5+8.3)	150	370	15	50	8	20
34058-40	RMT-1545	150	450	354	14.5 (1.5+3.2+1.5+8.3)	150	470	15	50	8	25
34058-45	RMT-2035	200	350	296	14.5 (1.5+3.2+1.5+8.3)	200	370	15	50	8	26
34058-50	RMT-2040	200	400	354	14.5 (1.5+3.2+1.5+8.3)	200	420	15	50	8	30
34058-55	RMT-2045	200	450	398	14.5 (1.5+3.2+1.5+8.3)	200	470	15	50	8	33
34058-60	RMT-2050	200	500	441	14.5 (1.5+3.2+1.5+8.3)	200	520	15	50	8	37
34058-65	RMT-2060	200	600	543	14.5 (1.5+3.2+1.5+8.3)	200	620	15	50	8	45