

E-RX-J

Adequate for center distance measurement for holes at different levels




Digital direct reading of center distance measurement "between holes with equal diameter at different levels"


Direct reading system
Digital

New

E-RX30J

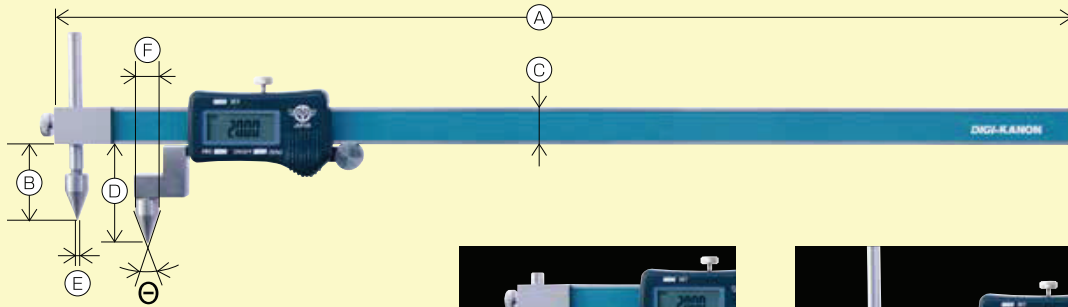

- Since the probe of main scale moves vertically, center distance measurement between holes at different levels is available.



■ E-RX-J : Specifications

(Unit : mm)



Model	Measuring range	Resolution	Instrumental error	Minimum hole diameter	Maximum hole diameter	Power supply	Weight	A	B	C	D	E	F	θ
E-RX30J	10~300	0.01	±0.05	φ 1	φ 10	SR44 1 piece	300g	435	18~52	16	42	φ 1	φ 10	40°

RM-DX



Centerline caliper for distance between center to center distance of holes with equal diameter



Adequate for center to center distance measurement!

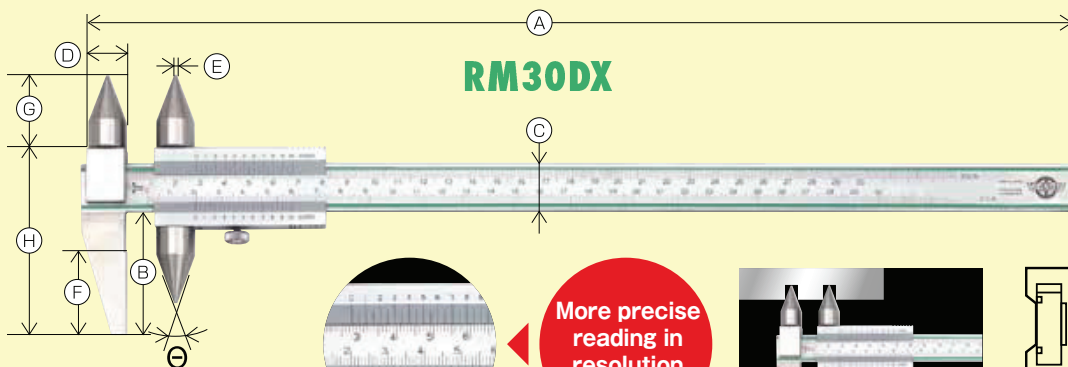

More precise reading in resolution of 0.05!



■ RM-DX : Specifications

(Unit : mm)

Model	Measuring range		Minimum reading	Instrumental error	Minimum hole diameter	Maximum hole diameter	Weight	A	B	C	D	E	F	G	H	I	θ	
	Pitch for upper side	Pitch for lower side																
RM15DX	17~150	9~150	0.05 (Division of 36 mm into 20 equal parts)	±0.07	φ 3	φ 16	400g	280	330	50	20	φ16	φ1.9	34	31	76	4	40°
RM20DX	17~200	9~200																
RM30DX	17~300	9~300																
RM60DX	17~600	9~600																
RM100DX	21~1000	11~1000	±0.11	φ 5	φ 20	3.15kg	1200	90	32	φ20	φ4	67	35	129	8			
			±0.15															

RM(II) Offset centerline caliper



For center to center distance with different diameters!

RM(II) 30

● In addition measurement between holes with different diameters is available because the probe of main scale moves vertically.

■ RM(II) : Specifications (Unit : mm)

Model	Measuring range		Minimum reading	Instrumental error	Minimum hole diameter	Maximum hole diameter	Weight	A	B	C	D	E	F	G	H	I	J	K	θ
	Pitch for upper side	Pitch for lower side																	
RM(II)15	25~150	20~150	0.1 (Division of 29 mm into 10 equal parts)	±0.07	φ 1	φ 5	180g	261	70	φ 6	φ 0.2	—	φ 0.2	φ 6	φ 6	3	40	16	53°
RM(II)30	35~300	25~300		±0.08	φ 3	φ 29	550g	422	120	φ 30	φ 2	50	φ 2	φ 10	φ 30	6	70	25	40°
RM(II)60	35~600	25~600		±0.11			1.3kg	781	φ 4										
RM(II)100	50~1000	40~1000		±0.15	φ 5	3.5kg	1233	124											

RM-S Adequate for center distance measurement for small diameter holes



Vernier caliper for measuring circular hole center distance adequate for "small diameter hole".

RM-S15

■ RM-S : Specifications (Unit : mm)

Model	Measuring range		Minimum reading	Instrumental error	Minimum hole diameter	Maximum hole diameter	Weight	A	B	C	D	E	F	G	H	θ
	Pitch for upper side	Pitch for lower side														
RM-S15	5~150	3~150	0.05 (Division of 39 mm into 29 equal parts)	±0.07	φ 0.8	φ 4	180g	280	96	φ 4	φ 0.8	26	50	20	20	40°