

TOHNICHI – SP-H Preset Click Type Torque Wrench

Brand: Tohnichi - Japan

Model: SP-H Series

Features:


- Made with smaller outside width to work in narrow spaces, including hydraulic piping, where current open-end type is unable to access.
- Preset style.
- The set torque cannot be changed without using a special tool (sold separately), preventing the operator from changing torque by mistake.
- A clear "click" sound signals tightening completion upon reaching the set torque.
- Applicable for international use including the EU region.
- Compliant with ISO 6789 Type II Class B calibration procedures.

Notes

- Models SP38N2X14H to SP67N2X27H come with a resin grip, while SP120N2X32H-MH has a metal grip.



Dimensions

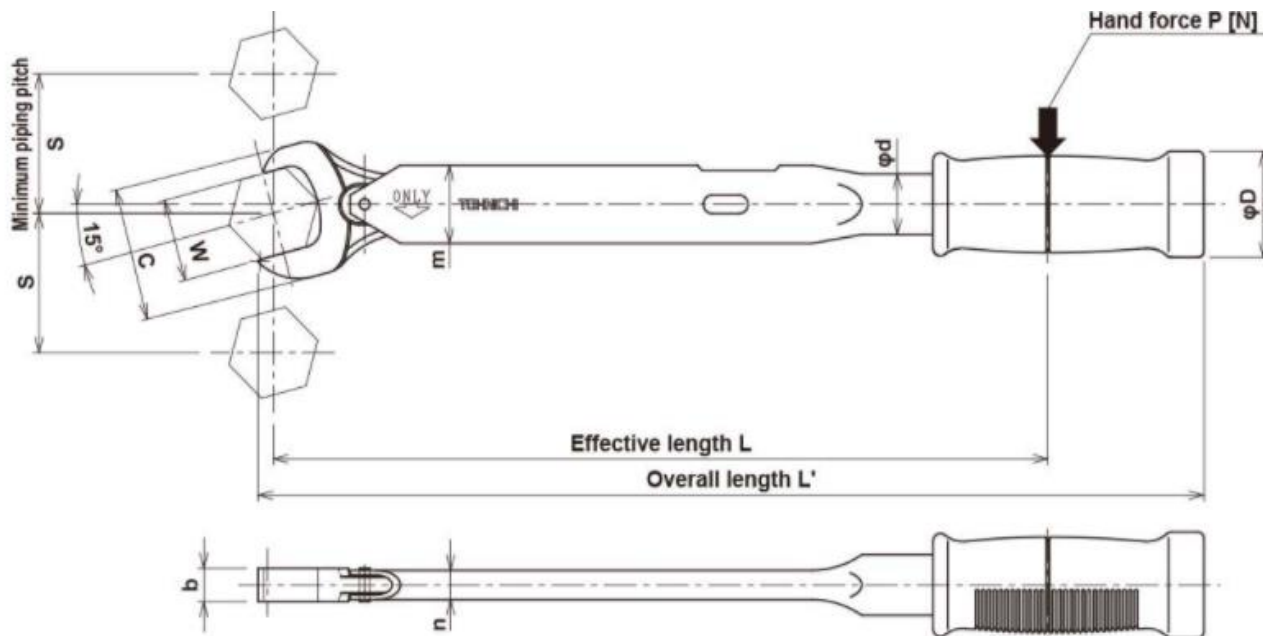

Specification:

MODEL			SP38N2×14H	SP38N2×19H	SP67N2×27H	SP120N2×32H-MH
S.I. RANGE [N • m]			8 ~ 25	8 ~ 39	13 ~ 67	24 ~ 120
METRIC RANGE [kgf • cm]			80 ~ 250	80 ~ 390	130 ~ 670	240 ~ 1200
WIDTH ACROSS FLATS [mm]			14	19	27	32
MINIMUM PIPING PITCH [mm]			26	35	46	54
MAX. HAND FORCE [N]			148	227	277	385
DIMENSION [mm]	EFFECTIVE LENGTH	L	169	172	242	312
	OVERALL LENGTH	L'	218	222	294	363
	HEAD	C	26.3	33.1	43.6	51.6
		b	8			11
	BODY	m	25.5			28
		n	11.2			12.2
		d	20			21.7
		D	34			21.5
WEIGHT[kg]			0.37		0.48	0.75
THRUSTRING TOOL [OPTIONAL ACCESSORY]			No.930			
Accuracy ±3%						