

Uphill Table Deduster With Dust Cleaner & Auto Feeder Model: JMJ-5



Product Introduction:

Uphill Tablet Polishing deduster also employed many new designs, to allow and to ensure a better and safer production. This machine is able to act as both elevating and dedusting machine, which made it a usual combination with other tablet-compressing machine and metal detection machine, and also made it extremely applicable in the field of pharmacy, chemical engineering, electronics and food.


Features :

- Automatic feeding, reduce manual operation, improve efficiency.
- The dust removal path is long, automatic surface polishing, deburring, static electricity, no damage to the tablet, good effect.
- Suitable for different types of tablets, no need to replace parts

Table Deduster Technical Data :

| | |
|----------------------------|--------------------------------|
| Production capacity(pcs/h) | 1,000,000 (Φ6mm) |
| Removal distance(m) | 6.2 |
| Applicable | Φ3-Φ25 |
| Compressed Air | 0.1M ³ /Min 0.05Mpa |
| Vacuum | 2.7M ³ /Min 0.1Mpa |
| Power supply | 220V, 50HZ, 1 phase 0.15kw |
| Dimensions(mm) | 500*550*1400 |
| Weight(kg) | 80KG |

Structure :

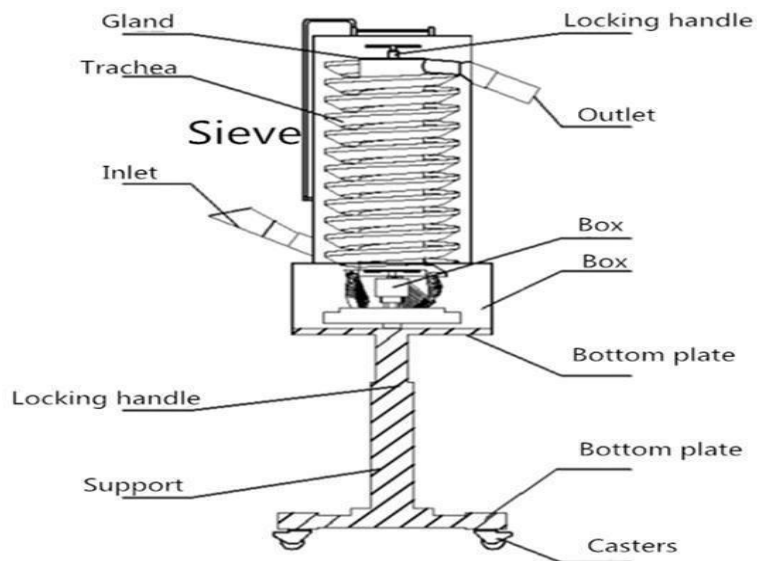

Dust Cleaner (Optional) **1.1kW recommended

Model : X CJ-36

Technical Data :

| | | | |
|----------------------|----------------------|----------------------|----------------------|
| Rated Voltage | 380V 50HZ | | |
| Noise | <75db(A) | | |
| Motor Power | 1.1kw | 1.5KW | 2.2kw |
| Extraction rate | 360m ³ /h | 600m ³ /h | 975m ³ /h |
| Limit vacuum degree | 16KPa | 18KPa | 20 kPa |
| Weight for main | 60kg | 60KG | 80KG |
| Dimension of machine | 800*450*1100mm | 800*450*1100mm | 900*500*1100mm |

AutoFeeder (Optional)

Model : ZDJ-1

Product Introduction:

A vibratory feeder is installed at the bottom of the feeding chute. The operator can control the feeding speed through the feeder control button located on the control panel according to the requirement of the production.

Technical Data :

| | |
|-----------------------------|---|
| Model | ZDJ-1 |
| Production capacity (pcs/h) | 1,000,000 (Φ6mm) , adjust depends on deduster |
| Applicable | Φ3-Φ25 |
| Power supply | 220V, 50HZ, 1 phase, 35W |
| Dimensions (mm) | 405*300*865 |
| Weight (kg) | 15 |