

5 Series

51 56 Series



3/2, 5/2 and 5/3 directional valves
Port size: G 1/4"

Crossover-free switching, guaranteed switch-over function

Compact design

High flow rate of 1000 l/min

Manual override with detent

High cycle life time up to one million cycles

Simple design of softseal spool system

In-line and easy manifold mounting system

Easily interchangeable solenoid



Ordering information

See page 2

Technical data

Medium:

Compressed air, to 40 µm, lubricated or non-lubricated

Operation:

Softseal spool valve, solenoid indirectly controlled

Mounting:

In-line or sub-base

Ports P, B and A G 1/4

Ports R (R1) and S (R2) Exhaust Port G 1/8

Operating pressure:

1.5 8 Bar

Flow characteristics:

750 to 1000 l/min

Ambient & medium temperature:

-5°C to +60°C


Materials

Body/sub-base: aluminium alloy

Softseal spool: NBR/aluminium alloy

Mounting sheets/screws: steel

Springs: stainless steel

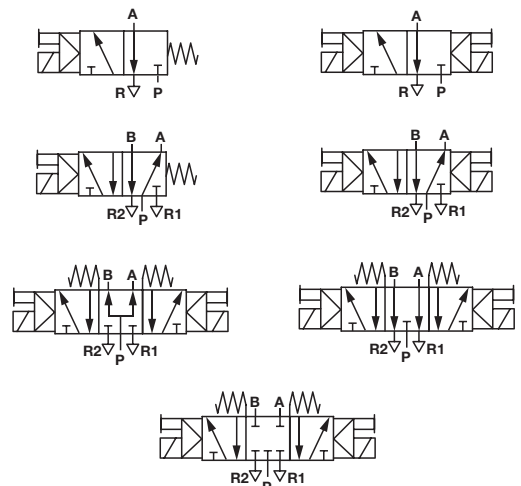

5 Series

51 56 Series

Parameters for solenoid

Symbol	Model	Function	Actuation	Pilot supply	Operating pressure (bar)	Flow (l/min)	Manual override	Weight (kg)	Drawing No.
	5102 000	3/2	Solenoid/spring	Internal	1.5 ... 8	1000	Push & detent	0,20	①
	5102 100	3/2	Solenoid/solenoid	Internal	1.5 ... 8	1000	Push & detent	0,30	②
	5202 000	5/2	Solenoid/spring	Internal	1.5 ... 8	1000	Push & detent	0,20	③
	5202 100	5/2	Solenoid/solenoid	Internal	1.5 ... 8	1000	Push & detent	0,30	④
	5502 200	5/3 APB	Solenoid/solenoid	Internal	2 ... 8	750	Push & detent	0,34	⑤
	5502 300	5/3 COE	Solenoid/solenoid	Internal	2 ... 8	750	Push & detent	0,34	⑤
	5502 400	5/3 COP	Solenoid/solenoid	Internal	2 ... 8	750	Push & detent	0,34	⑤

APB = All Ports Blocked, COE = Centre Open Exhaust, COP = Centre Open Pressure.


Coil codes

Coil code	Voltage
012 00	12 V d.c.
024 00	24 V d.c.
024 50	24 V, 50/60 Hz
048 50	48 V, 50/60 Hz
110 50	110/120 V, 50/60 Hz
230 50	220/240 V, 50/60 Hz

Electrical details for solenoid armature

Voltage tolerances	+/- 10%
Rating	100 % Continuous duty
Inlet orifice	0,8 mm
Materials	PPS (body), NBR (seal)
Insulation class	F class
Connector type	22 mm industrial standard
Protection class	IP65

Numbering Chart

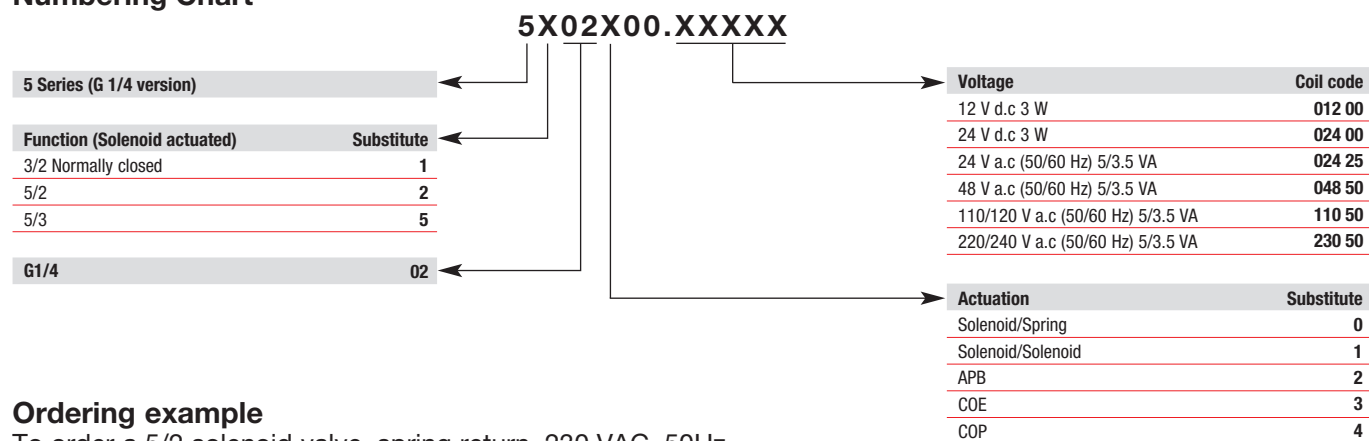

Ordering example

To order a 5/2 solenoid valve, spring return, 230 VAC, 50Hz
Port: G 1/4

Type: **5202 000. 23050**

Connector


Type: **200N/AC**

5 Series

51 56 Series

Manifold sub-base

Manifold for 5 port valves

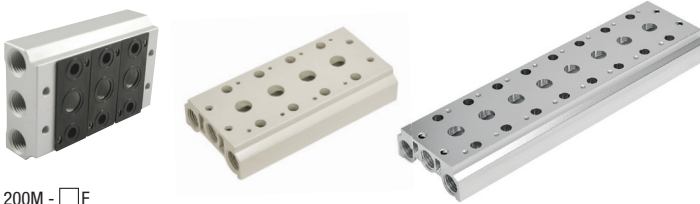

200M - □F

- Number of station 02 ... 09 for 2 ... 9 stations
- Number of station 10 for 10 stations

Accessories

Connectors, 22 mm industrial standard

Silencers, G1/8

Silencers, G1/4

Blanking plate

Blanking plug



200N/DC 15 ... 50 V d.c. LED light (Green)

ASS-100

ASS-200

200M-B 5/2 (for manifold)


MVRC 320-1/4"

200N/AC 70 ... 250 V a.c. LED light (Red)

Valve dimensions


3/2 Single solenoid valve (monostable) Mechanical spring return

①

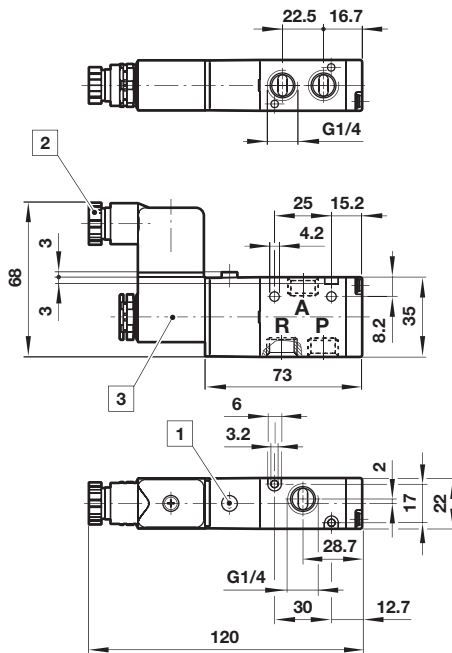

3/2 Double solenoid valve (bistable)

②

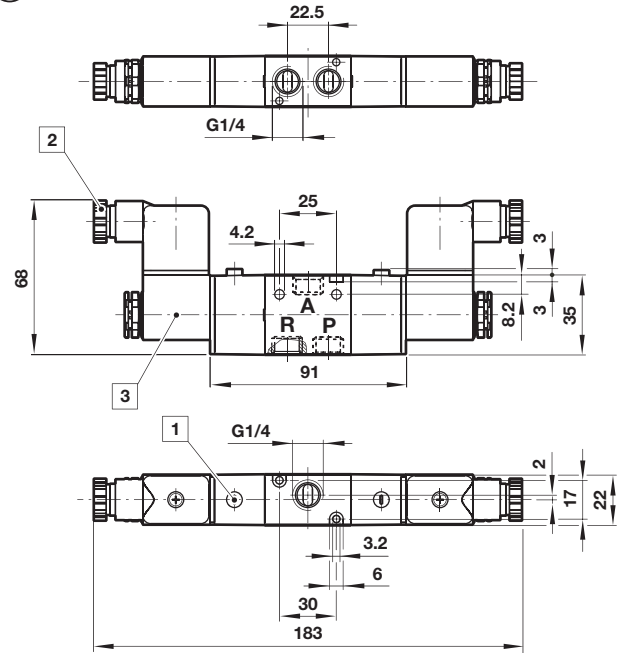

- 1 Manual override (Push and Detent)
- 2 Gland size Pg 11
- 3 Solenoid rotates 4 x 90°


5 Series

51 56 Series

Valve dimensions


5/2 Single solenoid valve (monostable) Mechanical spring return

③

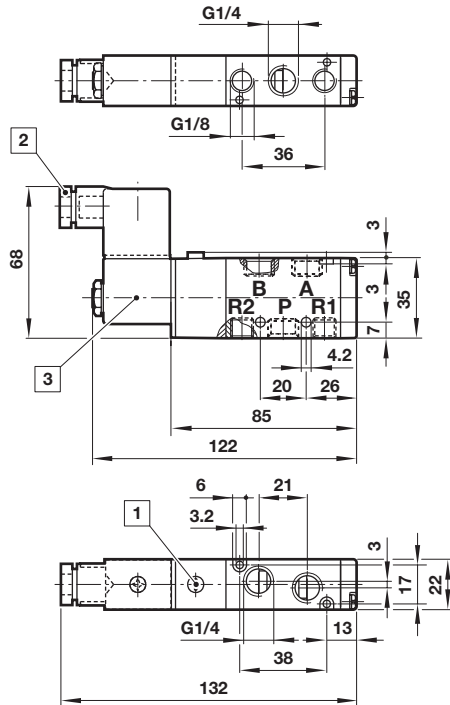


5/2 Double solenoid valve (bistable)

④

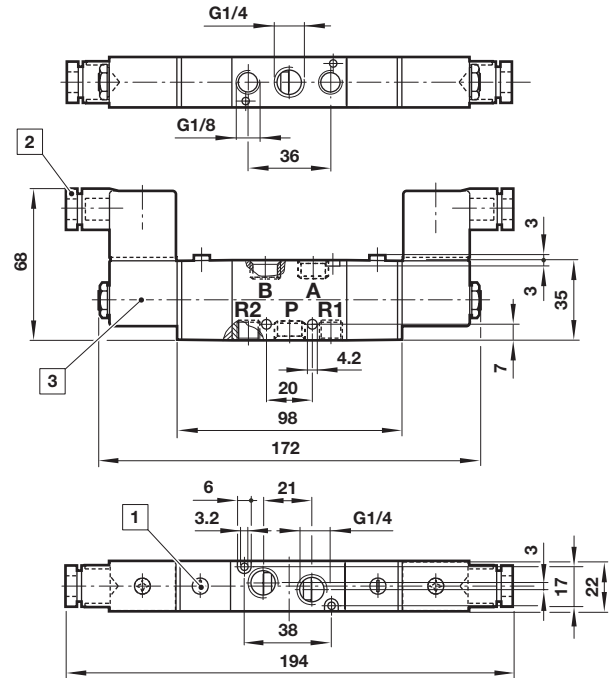

5/3 Double solenoid valve

⑤

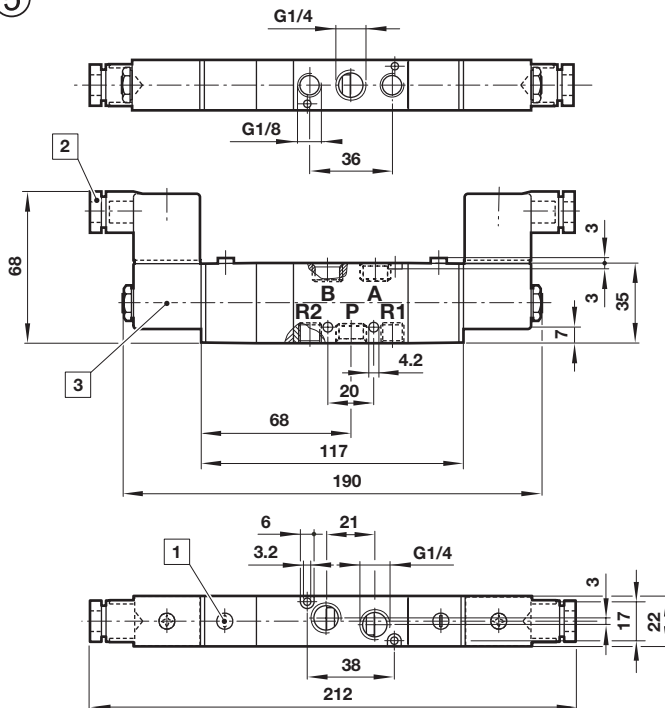



- ① Manual override (Push and Detent)
- ② Gland size Pg 11
- ③ Solenoid rotates 4 x 90°

5 Series

51 56 Series




Manifold sub-base

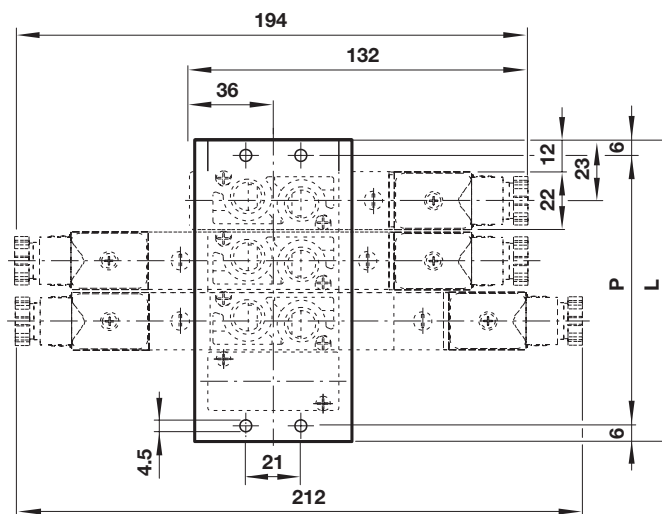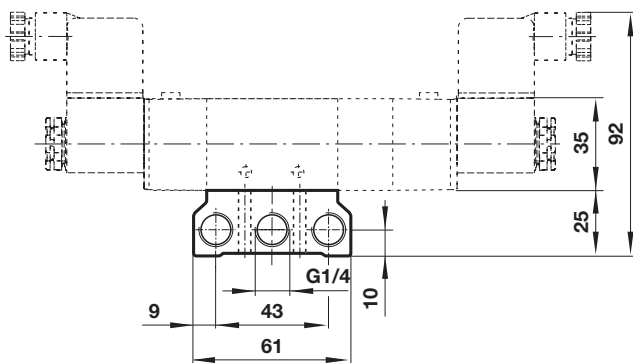

Type	No. of station	P	L	Weight (kg)
200M-2F	2	57	69	0,200
200M-3F	3	80	92	0,261
200M-4F	4	103	115	0,322
200M-5F	5	126	138	0,383
200M-6F	6	149	161	0,440
200M-7F	7	172	184	0,505
200M-8F	8	195	207	0,566
200M-9F	9	218	230	0,627
200M-10F	10	241	253	0,688

Blanking plate for manifold sub-base

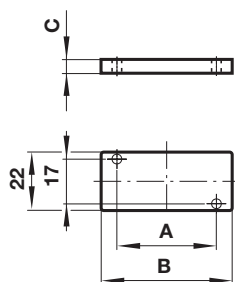

Type	For function	A	B	C	Weight (kg)
200M-B	5/2	38	50	2	0,018

5 Series

51 56 Series


Port size: G 1/4"

Pilot actuated valves

Symbol	Model	Function	Pilot	Mid position	Return	Operating pressure (bar)	Pilot pressure (bar)	Flow (l/min)	Weight (kg)	Drawing No.
	5302 000	3/2	Air		Spring	0 ... 8	1,5 ... 8	1000	0,122	⑬
	5302 100	3/2	Air		Air	0 ... 8	1,5 ... 8	1000	0,134	⑮
	5402 000	5/2	Air		Spring	0 ... 8	1,5 ... 8	1000	0,106	⑰
	5402 100	5/2	Air		Air	0 ... 8	1,5 ... 8	1000	0,134	⑲
	5602 200	5/3	Air	APB	Spring	0 ... 8	1,5 ... 8	750	0,179	⑳
	5602 300	5/3	Air	COE	Spring	0 ... 8	1,5 ... 8	750	0,179	㉑
	5602 400	5/3	Air	COP	Spring	0 ... 8	1,5 ... 8	750	0,179	㉑

APB = All Ports Blocked, COE = Centre Open Exhaust, COP = Centre Open Pressure.

Numbering Chart

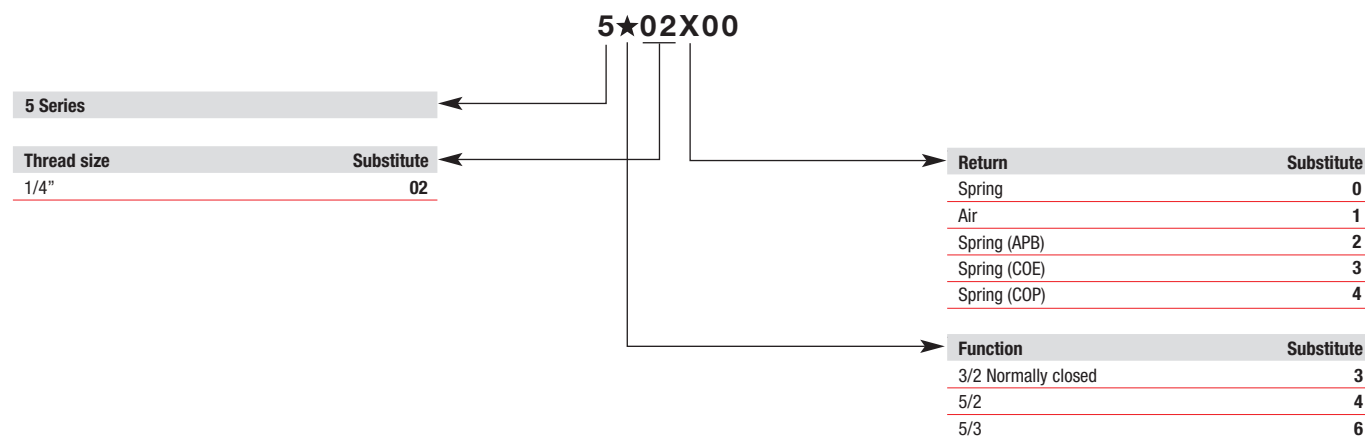

Ordering example


To order a 5/2 valve, G1/4 ports, air pilot, spring return
Type: 5402 000

5 Series

51 56 Series

**3/2 Single air pilot valve,
Port: G 1/4"
Spring return**

⑬

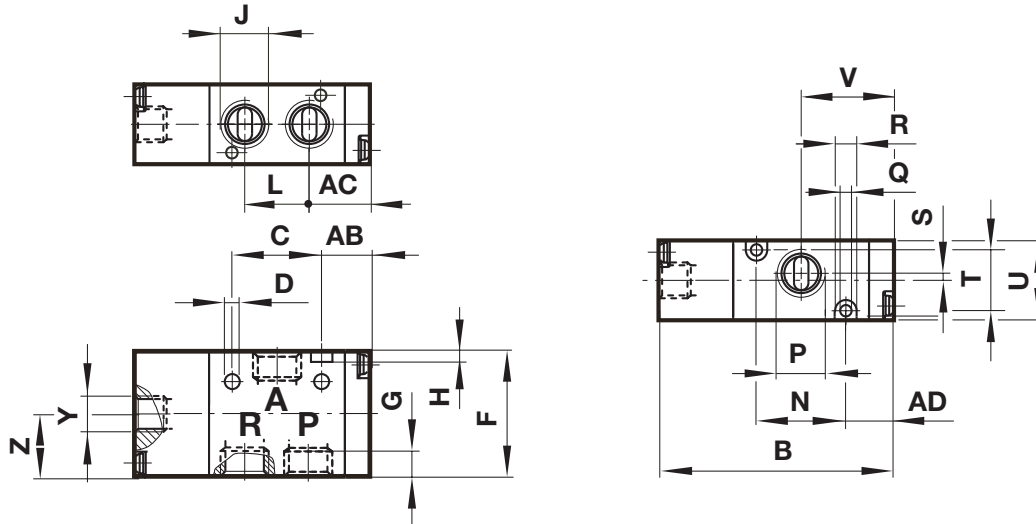

Serie	Drawing	AB	AC	AD	B	C	D	F	G	H	J	L
53	⑬	12,5	16	12,5	70	25	4,3	35	8,5	3	1/4"	22,5

Serie	Drawing	N	P	Q	R	S	T	U	V	X	Y	Z
53	⑬	30	1/4"	3,2	6	2	17	22	27,5	-	1/8"	17,5

Attention:


Port: P, A and R (G 1/4")

5 Series

51 56 Series

**3/2 Double air pilot valve,
Port: G 1/4"**

⑮

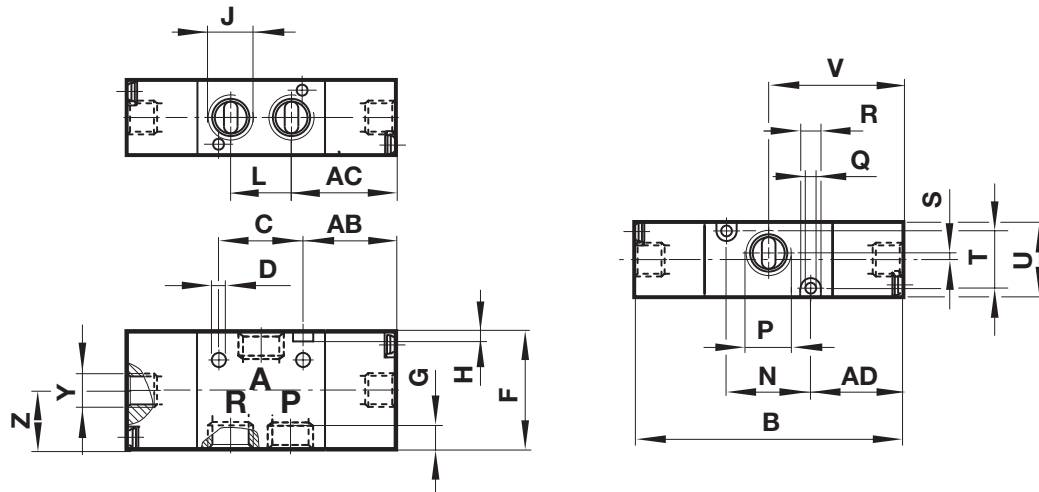

Serie	Drawing	AB	AC	AD	B	C	D	F	G	H	J	L
53	⑮	27	30.75	27	84	25	4,3	35	8,5	3	1/4"	22.5

Serie	Drawing	N	P	Q	R	S	T	U	V	X	Y	Z
53	⑮	30	1/4"	3,2	6	2	17	22	42	-	1/8"	17,5

Attention:


Port: P, A and R (G 1/4")

5 Series

51 56 Series

**5/2 Single air pilot valve,
Port: G 1/4"
Spring return**

⑰

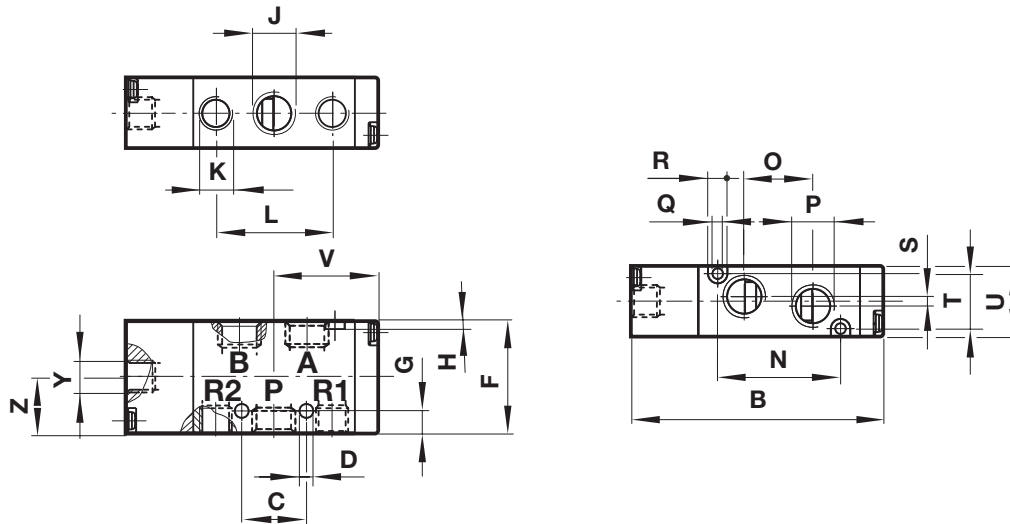

Serie	Drawing	B	C	D	F	G	H	J	K	L	N
54	⑰	77,7	20	4,3	35	7	3	1/4	1/8	36	38

Serie	Drawing	O	P	Q	R	S	T	U	V	Y	Z
54	⑰	21	1/4	3,2	6	3	17	22	31,7	1/8	17,5

Attention:

Port: P, A and B (G 1/4")


Port: R1 and R2 (G 1/8")

5 Series

51 56 Series

**5/2 Double air pilot valve,
Port: G 1/4"**

①

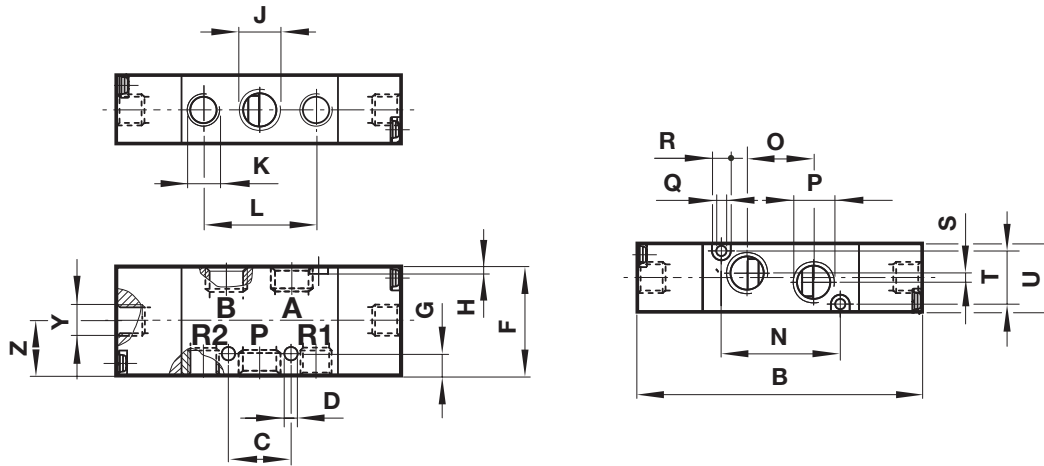

Serie	Drawing	B	C	D	F	G	H	J	K	L	N
54	①	92	20	4,3	35	7	3	1/4"	1/8"	36	38

Serie	Drawing	O	P	Q	R	S	T	U	Y	Z
54	①	21	1/4"	3,2	6	3	17	22	1/8"	17,5

Attention:

Port: P, A and B (G 1/4")


Port: R1 and R2 (G 1/8")

5 Series

51 56 Series

**5/3 Double air pilot valve,
Port: G 1/4"**

②1

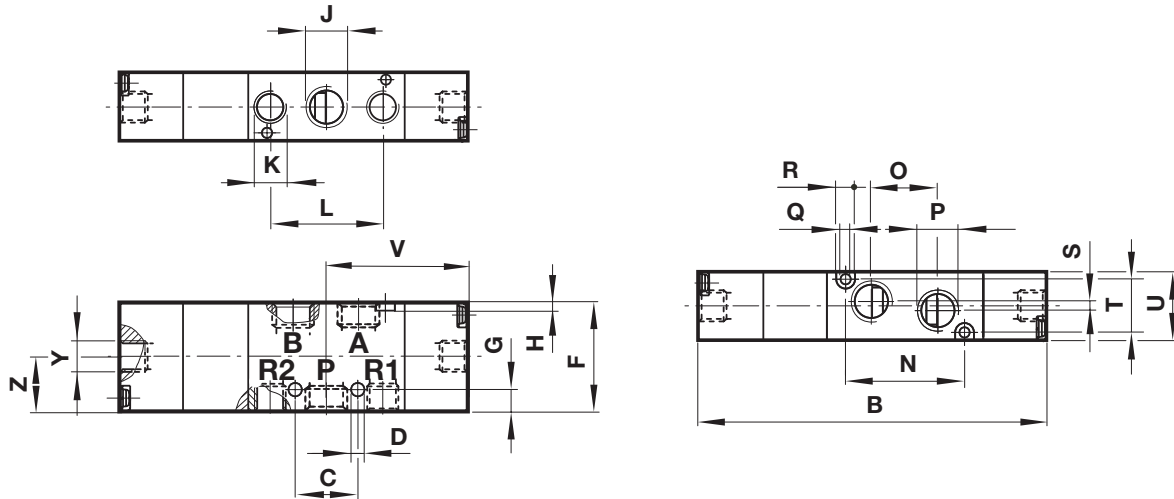

Serie	Drawing	B	C	D	F	G	H	J	K	L	N
56	②1	111	20	4,3	35	7	3	1/4	1/8	36	38

Serie	Drawing	O	P	Q	R	S	T	U	V	Y	Z
56	②1	21	1/4	3,2	6	3	17	22	46	1/8	17,5

Attention:

Port: P, A and B (G 1/4")

Port: R1 and R2 (G 1/8")