


F.R.L
F (Filtr)
R (Reg)
L (Lub)
PresSW
Shutoff
SlowStart
FlmResistFR
Oil-ProhR
MedPresFR
No Cu/
PTFE FRL
Outdrs FR
F.R.L
(Related)
CompFRL
LgFRL
PrecsR
VacF/R
Clean FR
ElecPneR
AirBoost
SpdContr
Silncr
CheckV/
other
Jnt/tube
AirUnt
PresCompn
Mech/
ElecPresSw
ContactSW
AirSens
PresSW
Cool
AirFloSens/
Contr
WaterRtSens
TotAirSys
(Total Air)
TotAirSys
(Gamma)
RefrDry
DesicDry
HiPolymDry
MainFiltr
Dischrg
etc
Ending



Pressure gauge for panel mounting

G53D Series



Features


- A flush panel mount has been added to the conventional pressure gauge.
- M5 female screws are used as standard for the port size.

Specifications

Model No.		G53D
Working fluid		Compressed air
Fluid temperature °C		5 (41°F) to 60 (140°F)
Ambient temperature °C		-5 (23°F) to 60 (140°F) (no freezing)
Accuracy *1		Full scale ±3%
Shape		DT type (rear side screw, stock section square)
Display size		φ52
Material	Stock/Bourdon tube	Copper alloy
	Housing	Steel plate + chrome plating
	Lens	Glass
Pressure range	MPa	0 (≈0 psi, 0 bar) to 0.2 (≈29 psi, 2 bar)
		0 (≈0 psi, 0 bar) to 0.4 (≈58 psi, 4 bar)
		0 (≈0 psi, 0 bar) to 1.0 (≈150 psi, 10 bar)
Port size	R	1/8 (with M5 female thread), 1/4 (with M5 female thread)
Weight	g	100

*1: The guaranteed indicator accuracy temperature is 20±15°C.

How to order




Code	Content
A Port size *1	
6	1/8 (with M5 female thread)
8	1/4 (with M5 female thread)
B Pressure display MPa *2	
P02	0 to 0.2
P04	0 to 0.4
P10	0 to 1.0


⚠ Precautions for model No. selection

- *1: Contact CKD when ordering NPT thread.
*2: Contact CKD for indications other than MPa.


Dimensions




Panel cut dimension




Cross-section A-A

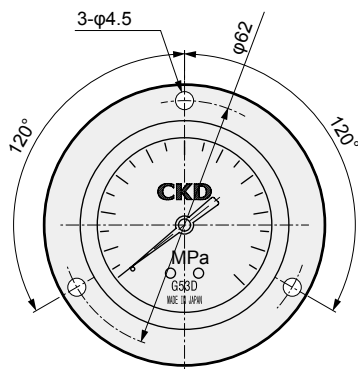


Scale display

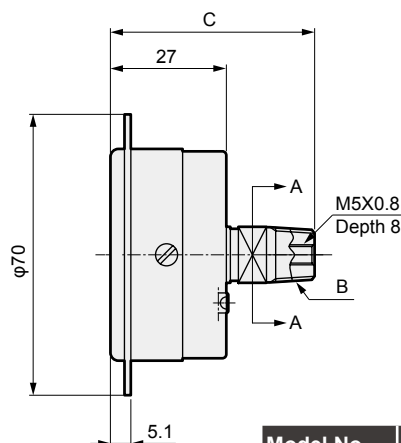


Model No.	B	C
G53D-6	Rc1/8	47
G53D-8	Rc1/4	50



Pressure display: P02



Pressure display: P04



Pressure display: P10

⚠ Safety precautions

- Make sure that impact and vibration are not applied directly onto the body.
- Repeated and sudden increases or decreases in pressure and pressure pulsations must be avoided as they could adversely affect the life of the pressure gauge. Ease the pressure fluctuation in the circuit.

F.R.L
F (Filtr
R (Reg
L (Lub
PresSW
Shutoff
SlowStart
FimResistFR
Oil-ProhR
MedPresFR
No Cu/ PTFE FRL
Outdrs FR
F.R.L (Related)
CompFRL
LgFRL
PrecsR
VacF/R
Clean FR
ElecPneuR
AirBoost
SpdContr
Silncr
CheckV/ other
Jnt/tube
AirUnt
PrecsCompn
Mech/ ElecPresSw
ContactSW
AirSens
PresSW Cool
AirFloSens/ Contr
WaterRtSens
TotAirSys (Total Air)
TotAirSys (Gamma)
RefrDry
DesicDry
HiPolymDry
MainFiltr
Dischrg etc
Ending