

Flexible combination of modules allows application in a variety of transporting situations

Variations are made unlimited simply by rearranging standard parts.



2
axes **YZ type**
Transport/part feed

2
axes **XY type**
Inspection

3
axes **XYZ type**
Adhesive application



Electric actuator

- Complete with axes of various sizes.
- Max. load capacity 250 kg (ball screw drive).
- Max. stroke length 4,450 mm (timing belt drive).
- Use a no lubrication sealant to make it a long term maintenance-free unit.



**Motor
Controller
Set type**

Electric actuator

KBX SERIES

Easy construction of orthogonal transport systems to match a variety of processes.

3
axes


XYZ type



4
axes

XYZR type

It can even trace complex 3D shapes quickly and accurately



4
axes


XYZR type

Sealing

2
axes

XZ type

Stocker

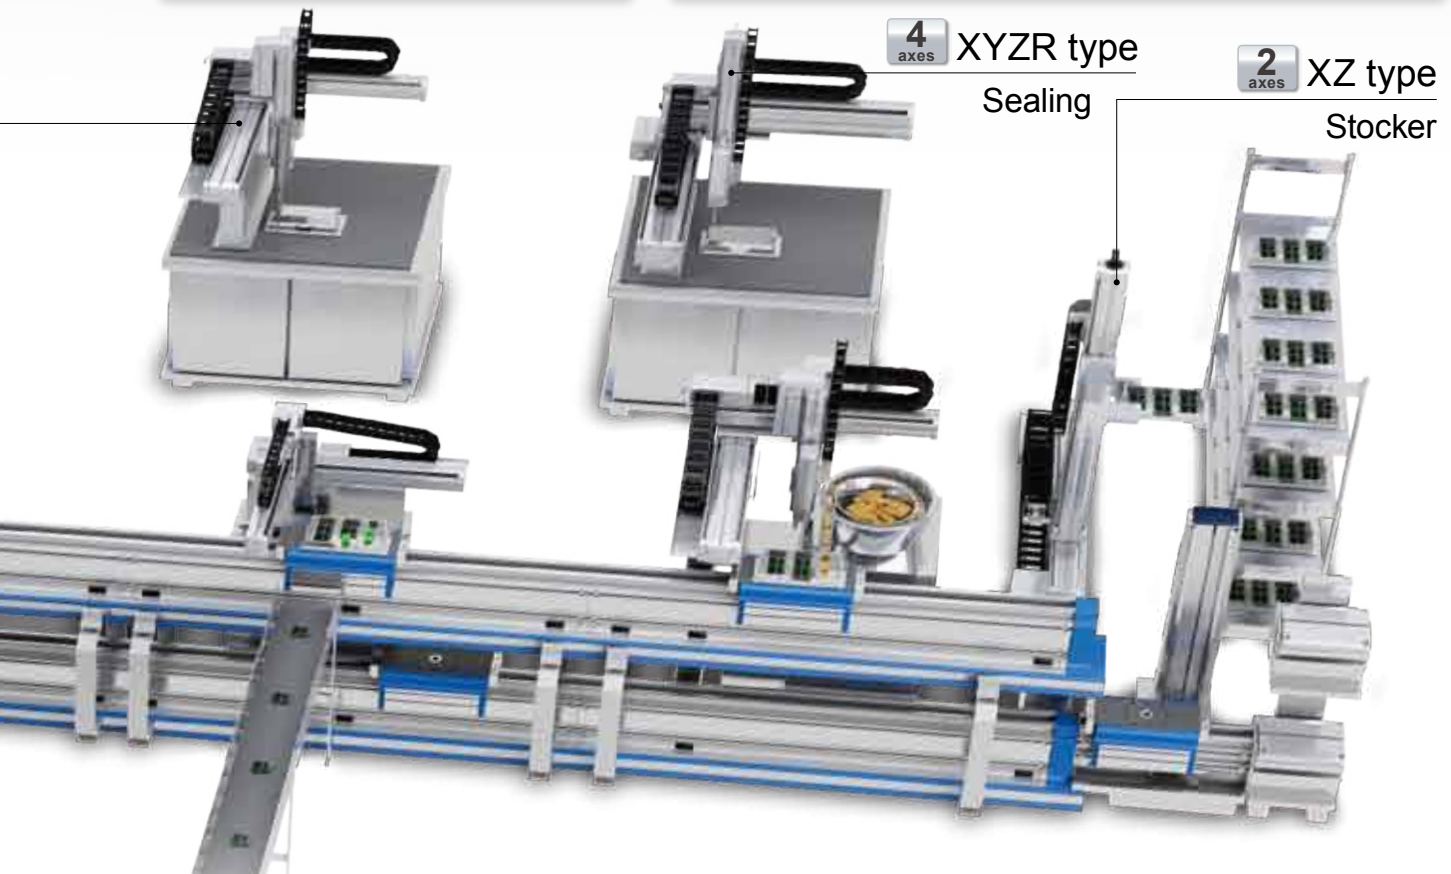

Controller

- Connect single axis controllers with link cables to make a multi-axis controller.
- High tact, max. 4 axes simultaneous control, and complex sealing available.

