


## Model K9

- > Digital touch panel
- > Capacity: 2000 cards / codes
- > Three accesses: Card, PIN, Card + PIN
- > Backlight keys
- > Easy installation

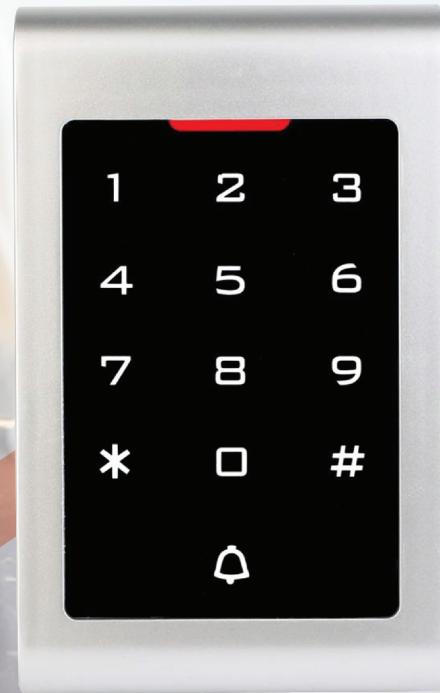

# STANDALONE ACCESS CONTROLLER

### Product Feature:

Full programming from keypad
2000 users, support Card, PIN, Card + PIN
Backlight keys
Adjustable Door Output time, Alarm time, Door Open time
Very low power consumption (30mA)
Fast operating speed, <20ms with 2000 users
Lock output current short circuit protection
Easy to install and program
Build in light dependent resistor (LDR) for anti tamper
Build in buzzer
Red, Yellow and Green LEDs display the working status

### Technical Specification:

Operating Voltage:	DC12V±10%
User Capacity:	2000
Card Reading Distance:	3-6cm
Frequency:	125KHZ
Active Current:	<60mA
Idle Current:	25±5mA
Lock Output Load:	Max 3A
Alarm Output Load:	Max 20A
Operating Temperature:	-45°C~60°C
Operating Humidity:	10%~90% RH
Adjustable Door Relay Time:	0-99 seconds
Adjustable Alarm Time:	0-3 minutes
Product size:	120x78x22mm