









Ceiling Cassette Series **R410A**



Product Line Up

Ceiling Cassette Series

		Indoor Model	Outdoor Model	Capacity Range
TYPE OF REFRIGERANT	R410A	 FFN10/15CV1	 RN10/15FV1	1.0 - 1.5 hp
		 FCN20/25/30/35/40/50FV1 *Panel : BCFG1	 RN20/25CV1  RN28/30CV1  RN35DV1 RN40-50DY1	2.0 - 5.0 hp

Product Features



Technology


High effectively to deactivate bacteria by damaging those microbial DNA and their surface structures by this advanced plasma technology.

It emits massive positive and negative ions, and sterilize surrounding air with more effectively. FCN-F series emit 100 times more ions than ionizer technology in the current market by using our advance i-plasma technology.

Daikin FCN-F series ensures a clean and healthy environment lifestyle for you and your family.

Emit 100x more ions*
than Ionizer technology.

*positive + negative ions

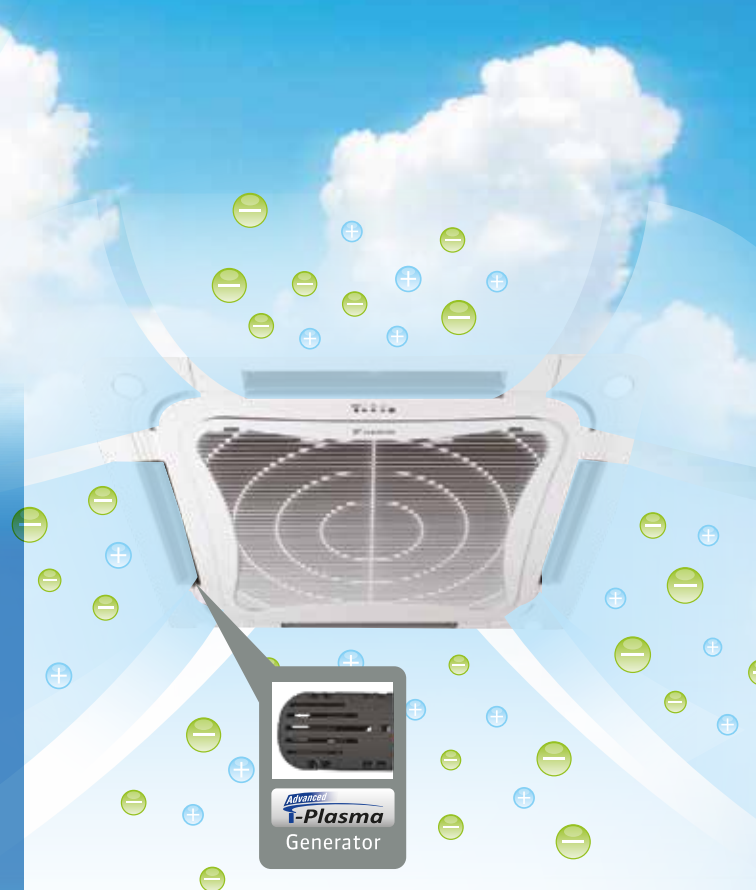

Inspired by nature

Elegant Design Panel

Inspired by Nature. Combining with “butterfly” concept into modern ceiling cassette panel design to provide user a totally different outlook which match into current living lifestyle.



Cassette
Panel



Intake
Grille



Daikin Ceiling Cassette F Series has won Malaysia Good Design Award 2015 in recognition of product design excellence, innovation and creativity.

Product Features

Exclusive Surround Air Flow

* Applicable for FCN-F series only.

Surround air flow feature provides an even air distribution and remarkably fast cooling to the entire area.



Compact and Easy-To-Use Controller

* Applicable for FFN-C and FCN-F with BCFG1 Panel only.

- Prominent temperature display.
- Real-time clock display.
- Easily accessible buttons.



DGS01 Wireless Controller

High Efficiency Hydrophilic Fin

The hydrophilic coated fin ensures the condensate water moves easily to the drain pan thus enhancing the cleanliness and lifespan of the cooling coil.


5 + 1 Years Warranty

Designed for durability and component quality, the units comes with 5 years warranty for compressor and 1 year warranty for general parts.




Built-in High Head Drain Pump

The unit comes with a built-in high head drain pump up to 700mm. A safety float is incorporated in the drain pump to monitor its water level.



Elegantly Designed Panel

The slim panel can be blended into any decoration and design.



Slim Wired Controller (Optional)

The unit also offers an optional wired controller upon your special requirement.

* Not applicable for CoolLight Series


- Dedicated buttons for Quiet and Turbo functions.
- Key lock function.
- Real-time timer. (7 days option, 2 events daily)



DSLM8 Wired Controller

Auto Random Restart

In the event of a sudden power failure during operation, unit can be automatically restarted (subject to certain protection conditions) from last setting condition. This eliminates the need to restart manually after each power failure.

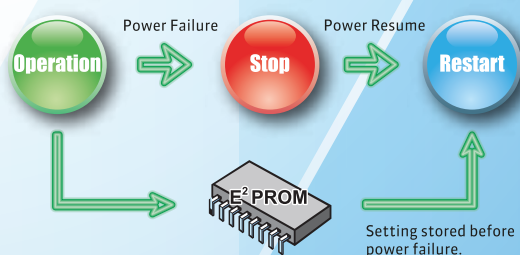



FFN10/15CV1



FCN20/25/30/35/40/50FV1
*Panel : BCFG1

Specifications

R410A

MODEL	INDOOR UNIT		FFN10CV1	FFN15CV1
	OUTDOOR UNIT		RN10FV1	RN15FV1
TOTAL COOLING CAPACITY		Btu/hr	9,500	12,500
		kW	2.78	3.66
INPUT POWER		W	950	1,250
RUNNING CURRENT, 1Ø[3Ø]		A	4.26	5.60
EER		Btu/hr/W /W/W	10.00 / 2.93	10.00 / 2.93
POWER SOURCE		V/Ph/Hz	220-240 / 1 / 50	
REFRIGERANT TYPE/CONTROL			R-410A / OUTDOOR CAP. TUBE	
AIR FLOW		CFM	410	
SOUND PRESSURE LEVEL	HIGH	dBA	41	41
	LOW		35	34
UNIT DIMENSION (WITH PANEL) (HxWxD)	INDOOR UNIT	mm	250 x 570 x 570 (295 x 640 x 640)	
	OUTDOOR UNIT		550 x 658 x 273	
UNIT WEIGHT	INDOOR UNIT (UNIT + PANEL)	kg	15.5 + 2	
	OUTDOOR UNIT		28	29
COPPER PIPE SIZE	LIQUID	mm/in	6.35 / 1/4	
	GAS	mm/in	9.52 / 3/8	12.7 / 1/2
HEAT INSULATION			BOTH LIQUID AND GAS PIPING	

MODEL			INDOOR UNIT		FCN20FV1	FCN25FV1	FCN30FV1		FCN35FV1	FCN40FV1	FCN50FV1
			OUTDOOR UNIT		RN20CV1	RN25CV1	RN28CV1	RN30CV1	RN35DV1	RN40DY1	RN50DY1
TOTAL COOLING CAPACITY			Btu/hr	18,500	23,000	28,000	30,000	36,000	42,000	46,000	
			kW	5.42	6.7	8.21	8.79	10.55	12.31	13.50	
INPUT POWER			W	1,795	2,090	2,810	2,930	3,770	4,110	4,800	
RUNNING CURRENT, 1Ø[3Ø]			A	7.92	9.24	13.0	13.6	16.7	[6.57]	[8.39]	
EER			Btu/hr/W /W/W	10.51 / 3.02	11.23 / 3.22	9.87 / 2.92	10.24 / 3.00	9.55 / 2.80	10.24 / 3.00	9.59 / 2.81	
POWER SOURCE			V/Ph/Hz	220-240 / 1 / 50					380-415 / 3 / 50		
REFRIGERANT TYPE AND CONTROL				R410A / Outdoor Cap.Tube							
AIR FLOW			CFM	840	890	890		1030	1120	1120	
SOUND PRESSURE LEVEL	HIGH	dBA	39	41	41		46	48	48		
	LOW		34	35	35		37	41	41		
UNIT DIMENSION (WITH PANEL) (HXWXD)	INDOOR UNIT		mm	246 x 840 x 840 (305 x 950 x 950)				288 x 840 x 840 (347 x 950 x 950)			
	OUTDOOR UNIT			651 x 855 x 328		753 x 855 x 328		852 x 1,030 x 400			
UNIT WEIGHT	INDOOR UNIT (UNIT + PANEL)		kg	22 + 5				25 + 5		25 + 5	
	OUTDOOR UNIT			43	47	57		71	95	84	
PIPE CONNECTION		SIZE	LIQUID	mm	6.35 / 1/4		9.52 / 3/8				
			GAS	mm	12.7 / 1/2	15.88 / 5/8					
HEAT INSULATION				BOTH LIQUID AND GAS PIPING							

1) DUE TO OUR POLICY OF INNOVATION, ALL SPECIFICATIONS ARE SUBJECTED TO CHANGE BY THE MANUFACTURER WITHOUT PRIOR NOTICE.
2) ALL UNITS ARE BEING TESTED AND COMPLY TO ISO 5151.
3) NOMINAL COOLING CAPACITY ARE BASED ON THE CONDITIONS BELOW :
COOLING 27°C DB / 19°C WB INDOOR AND 35°C DB OUTDOOR.
4) SOUND PRESSURE LEVEL ARE MEASURED IN ANECHOIC CHAMBER. DURING ACTUAL OPERATION,
SOUND PRESSURE LEVEL WILL BE HIGHER AS A RESULT OF ROOM SEPCIFICATION CONDITION.



www.daikin.com.my

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(109719-M)

Head Office Tel: 03-7953 8388 Fax: 03-7956 4371
Email: sales_enquiry@daikin.com.my, customer_service@daikin.com.my

Branches:	• Kedah	Tel: 04-730 5670	• Johor	Tel: 07-557 7788
	• Penang	Tel: 04-331 1670	• Pahang	Tel: 09-567 6778
	• Perak	Tel: 05-548 2307	• Kelantan	Tel: 09-747 4578
	• Negeri Sembilan	Tel: 06-768 8969	• Sabah	Tel: 088-722 194
	• Melaka	Tel: 06-288 1133	• Sarawak	Tel: 082-333 299

Authorized dealer: