

#### HD 7/11-4 Classic

Reliable single-phase high-pressure cleaner HD 7/11-4 Classic with 700 l/h water flow, strong crankshaft pump, ceramic piston and the latest sealing technology. For long service intervals.
















#### 1 Durable and robust

- Extra large crankshafts and connecting rods with robust ball bearings
- Ceramic pistons for reduced wear and tear.

#### 2 Especially easy to maintain

- Wide-opening machine cover for easy access to all service and maintenance-relevant components.
- Large water fine filter for optimal protection of the pump.

#### 3 Improved cleaning performance


- Patented K\u00e4rcher power flat jet nozzles: up to 40 percent more impact force than conventional nozzles.
- High area coverage and thorough dirt removal.

#### 4 Excellent mobility

- Large wheels and ergonomic push handle ensure optimal turning manoeuvrability and easy handling.
- The foldable push handle enables space-saving storage.

#### **TECHNICAL DATA AND EQUIPMENT**



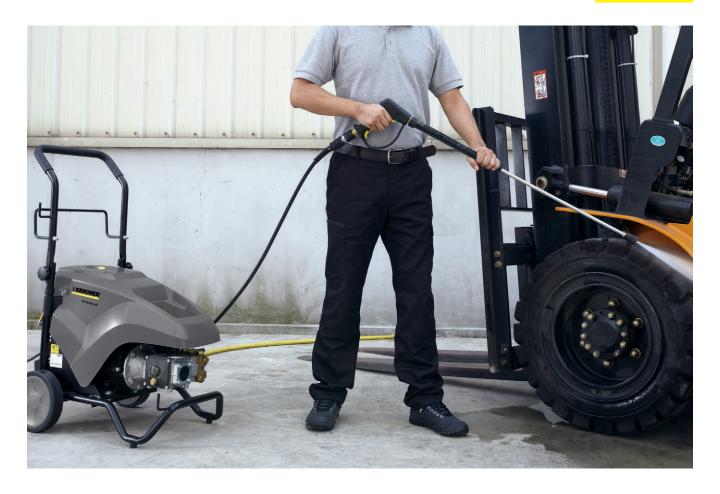

#### HD 7/11-4 Classic

- Durable crankshaft pump with ceramic-coated pistons
- Large, transparent water filter
- Infinitely variable pressure regulation

Technical data		
Order no.		1.367-305.0
EAN code		4039784858749
Current type	Ph / V / Hz	1 / 220 - 240 / 50
Flow rate	l/h	520 - 700
Working pressure	bar / MPa	70 - max. 150 / 7 - 11
Max. pressure	bar	150
Max. inlet temperature	°C	60
Connected load	kW	2.9
Number of simultaneous users		1
Portability		cart
Weight	kg	49.1
Dimensions (L × W × H)	mm	709 × 469 × 1000

Equipment		
Spray gun		Standard
High-pressure hose	m	10 / DN 6, 250 bar
Spray lance	mm	850
Power nozzle		1
ANTI!Twist		-
Pressure switch-off		I
Servo control		-
Crankshaft pump with ceramic pistons		1

■ Included in the scope of supply.













		Order no.	Flow rate		Price	Description
Trigger guns				'		
Standard trigger gun	1	9.751-139.0				High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 × 1.5.
EASY!Force Advanced	2	4.118-005.0				Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.
EASY!Force conversion kit 2 - from machine	3	4.111-051.0				Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.
Quick connect						
Quick coupling	4	6.401-458.0				For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray Lance interface. With M 22 x 1.5 internal thread.
Male coupling	5	6.401-459.0				Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.

<sup>■</sup> Included in the scope of supply. 

Available accessories.





		Order no.	Max. working pressure	Length	Price	Description
Spray lance						
Spray lance 850mm	1	9.751-044.0				600mm zinc-coated spray lance with hand screw connection is suitable for machines of the HD Classic range. Spray lance is non-rotatable.
250 mm lance, non-rotatable	2	4.760-667.0		250 mm		250 mm stainless steel lance. With manual coupling. Non-ro-tatable.
550 mm lance, non-rotatable	3	4.760-665.0		550 mm		550 mm stainless steel lance. With manual coupling. Non-rotatable.
600 mm spray lance	4	9.751-140.0				600 mm long, zinc coated spray lance with hand screw connection. Not rotatable.
Rotating spray lances						
Spray lance	5	4.760-664.0	300 bar	600 mm		600 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.
	6	4.760-663.0	300 bar	840 mm		850 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.
	7	4.760-660.0	300 bar	1050 mm		1050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.
	8	4.760-661.0	300 bar	1550 mm		1550 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.
	9	4.760-662.0	300 bar	2050 mm		2050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360° under pressure.
Angular spray lance		,	,			,
Spray lance for toilets and rain gutters	10	4.760-073.0				Stainless steel lance WC and gutter with nozzle insert. Spe- cially shaped for effective and hygienic cleaning of gutters and toilets.
Flexible spray lance		1	1			,
Flexible lance	11	6.394-654.0	210 bar	1050 mm		1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.
High pressure articulated joint	12	4.481-039.0	300 bar			High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.
Telescopic spray lance						, p
Strap for telescopic spray pipe	13	6.373-987.0				Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.
Gutter cleaner						
Gutter cleaning lance	14	2.642-305.0				The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.
Undercarriage spray lance				,		,
Underbody lance	15	4.760-245.0		700 mm		Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.

<sup>■</sup> Included in the scope of supply. □ Available accessories.







		Order no.	Nozzle size		Price	Description
Power nozzle spray angle 25°						
Power nozzle	1	2.883-399.0	50			Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.
HP nozzle spray angle 0°						
Power nozzle	2	2.884-535.0	50			High-pressure nozzle with powerful jet for extremely stubborn dirt. $\hfill\Box$
Power nozzle spray angle 15°						
Power nozzle	3	2.883-390.0	55			Fan jet nozzle with 15° spray angle suitable for stubborn dirt.
Power nozzle spray angle 40°						
Power nozzle	4	2.884-524.0	50			Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. $\hfill\Box$

<sup>■</sup> Included in the scope of supply. 

□ Available accessories.









		Order no.	Max. working pressure	Nozzle size		Price	Description	
Dirt Blaster, small								
Dirt blaster	1	4.767-233.0	180 bar	50			Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor.	
Dirt blaster, large								
Dirt blaster	2	4.763-253.0	300 bar	50			The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	
Triple nozzles								
Triple nozzle	3	4.767-155.0	300 bar	53			Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5.	

 $<sup>\</sup>blacksquare$  Included in the scope of supply.  $\hfill\Box$  Available accessories.

















		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sig	les						· ·	Н
High-pressure hose	1	6.391-342.0	DN 8	315 bar	10 m		To extend the operating radius with the high-pressure clean er. Connection on both sides M22 x 1.5.	
	2	6.390-010.0	DN 8	315 bar	15 m		With screw connections on both sides, M 22 x 1.5 with bence protection.	
	3	6.390-031.0	DN 8	315 bar	20 m		Screw connections at both ends, M 22 x 1.5, with kink protection.	
	4	6.390-293.0	DN 8	315 bar	30 m		To extend the operating radius with the high-pressure clean er. Connection on both sides M22 x 1.5.	-
Longlife 400 with unions on both	sides							
High-pressure hose Longlife	5	6.392-282.0	DN 8	400 bar	1.5 m		Screw connections at both ends, M 22 x 1.5, with kink protection. Dual layer steel wire reinforced.	
	6	6.390-178.0	DN 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	
	7	6.388-083.0	DN 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	
	8	6.389-709.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	
	9	6.390-027.0	DN 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	
	10	6.390-294.0	DN 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	

<sup>10 | 6.390-294.0 |</sup> DN 8 ■ Included in the scope of supply. □ Available accessories.





















					,		
		Order no.	Max. working	Nozzle size	Diame- ter	Price	Description
Pipe cleaning hose. ID 6			<b> </b>				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	1	6.110-046.0	250 bar				The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	2	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	3	6.110-008.0	250 bar				nozzle R 1/8).
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	4	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	5	6.110-047.0	250 bar				The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	6	6.390-030.0	250 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).
Pipe cleaning nozzle							
Pipe cleaning dirt blaster D21/060	7	4.765-002.0		60	21 mm		The forward-tilted rotating pencil jet removes the most
Pipe cleaning dirt blaster D30/060	8	4.765-005.0		60	30 mm		stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.
Pipe cleaning nozzle	9	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet
	10	5.763-016.0		60	16 mm		directions for environmentally-friendly cleaning of blocked drains and pipes.
	11	5.763-017.0		50	30 mm		Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 x 30° backwards, diameter 30 mm.)
Rotating pipe cleaning nozzle	12	6.415-428.0		50	16 mm		Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.
Drum and tank cleaning							
Add-on kit mud sucker	13	2.641-798.0					For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.

<sup>■</sup> Included in the scope of supply. 

Available accessories.























T			T	1		1		_
	Order no.	Flow rate	Nozzle size	Diame- ter		Price	Description	
		·	'					
1	2.642-999.0							,
2	2.642-910.0						For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	
3	4.440-939.0						5m extension hose for FRV 30. Connection sleeve included.	
4	2.642-528.0						Suction cup for fixing the suction hose to smooth surfaces.	
5	2.642-532.0						Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	
6	2.642-997.0			300 mm			conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and	t
7	2.640-355.0			300 mm			Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	
8	2.640-679.0			500 mm				
1	ı							
9	2.639-187.0	650 - 850 l/h					Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	Ε
V								
10	2.642-433.0		50				Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
		1						
11	2.642-911.0						Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
12	4.441-040.0						5 m extension hose for FRV 30 Me. Includes connecting adapter.	
	2 3 4 5 5 6 6 8 9 9 10 11 11	1 2.642-999.0 2 2.642-910.0 3 4.440-939.0 4 2.642-528.0 5 2.642-532.0 6 2.642-997.0 7 2.640-355.0  8 2.640-679.0  10 2.642-433.0  11 2.642-911.0	1 2.642-999.0  2 2.642-910.0  3 4.440-939.0  4 2.642-528.0  5 2.642-532.0  6 2.642-997.0  7 2.640-355.0  8 2.640-679.0  8 9 2.639-187.0 650 - 850 l/h  NV  10 2.642-433.0  11 2.642-911.0	1 2.642-999.0  2 2.642-910.0  3 4.440-939.0  4 2.642-528.0  5 2.642-532.0  6 2.642-997.0  7 2.640-355.0  8 2.640-679.0  9 2.639-187.0 650 - 850 l/h  NV  10 2.642-433.0 50	Order no.   Flow rate   Nozzle size   ter	1   2.642-999.0	1   2.642-999.0	Price   Description

<sup>■</sup> Included in the scope of supply. 

Available accessories.

















		Order no.	Flow rate		Price	Description
Cup foam lance						
Cup foam lance Advanced 042	1	6.394-969.0				Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.
1-litre cleaning agent container for basic foam lance	2	5.071-414.0				For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).
1-litre cleaning agent container for advanced foam lance	3	6.414-050.0				Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).
Inno Foam Kit						
Inno Foam Set with detergent injector	4	2.640-151.0				High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.
Easy Foam Set						
Easy Foam Set with RM injector	5	2.640-691.0				HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.
Nozzle kits for Inno/Easy Foam Set						
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	6	2.640-688.0	700 - 1000 l/h			Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.
Foam nozzle mounting kit			1			
Foam nozzle attachment kit	7	2.637-926.0				Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.

<sup>■</sup> Included in the scope of supply. 

Available accessories.































		Order no.		Price	Description	
Cleaning agent injector						_
Cleaning agent injector for high pressure (without nozzle)	1	3.637-170.0			Cleaning agent dosage at high pressure 3 - 5 %	
Cleaning agent injector for high and low pressure (without nozzles)	2	3.637-001.0			Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	
Machine-specific nozzle kit with or		. 4.637-033.0	I		dosage. Waximom dosage about 15%.	_
Nozzle kit 750-1000 l/h	3				For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP	1
Nozzle kit 750-1000 l/h	4				power nozzle + union	ľ
Nozzle insert with order no. 4.637-	032.0		<u> </u>	_		Ť
Nozzle insert up to 1,100 l/h - high pressure	5	4.769-003.0			Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	
Nozzle insert up to 1,100 l/h - low pressure	6	4.769-001.0			For low pressure with machines up to 1.100 l/h	
Rotary coupling		l				
Rotary coupling	7	4.401-091.0			Reliably prevents twisting of HP hoses. Connection M $22\ x$ 1.5 m. Handle protection	
Coupling				•		
Coupler -2 × M22 × 1,5	8	4.403-002.0			For connecting and extending high-pressure hoses. Connection $2 \times M$ $22 \times 1.5$ .	-
Connector						
Nozzle screws / screw socket	9	4.402-022.0			Nozzle connector/screw connector for connecting high-pres sure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	
Y distributor	10	4.405-048.0			Offers the option to connect two spray units to the machine	e.
	11	4.111-024.0			Installation on the high pressure outlet.	Ī
Adapters		<u> </u>	·	<u>'</u>		
Sealing cone complete	12	4.424-004.0			In order to install high-pressure hose with male coupling or thread with M22 x 1.5 Alternative:4.111-032.0 Adapter 4 - Device new / Hose old Swivel	
EASY!Lock adapter			,		_	ı,
Adapter 1 M22AG-TR22AG	13	4.111-029.0			Adapter 1 to connect the old hose with the new hose	
Adapter 2 M22IG-TR22AG	14	4.111-030.0			Adapter 2 to connect the old device with the new hose and the old gun with the new hose	1
Adapter 3 M22IG-TR22AG	15	4.111-031.0			Adapter 3 to connect the old gun with the new spray lance and new servo regulator	
Adapter 5 TR22IG-M22AG	16	4.111-033.0			Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	
Adapter 6 TR22IG-M22AG	17	4.111-034.0			Adapter 6 to connect the new device with the old hose and the old hose with the new gun	ı
Adapter 7 M18IG-TR20AG	18	4.111-035.0			Adapter 7 to connect the old spray lance with the new nozzle	
Adapter 8 TR20IG-M18AG	19	4.111-036.0			Adapter 8 to connect the new spray lance with the old nozzle	
Adapter 12 rotary coupling	20	4.111-046.0			Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	

<sup>■</sup> Included in the scope of supply. 

Available accessories.



















		1				1	_
		Order no.	Length		Price	Description	
Automatic, self-winding hose reels	for wa	all mounting					
Add-on kit hose reel stainless steel K/P	1	6.391-520.0	20 m				
Automatic stainless steel hose reel	2	6.392-442.0	40 m			Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	- 1
Powder-coated swivel holder	3	2.639-931.0				Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose Rotatable 120°. Galvanised steel.	2. 🗆
Stainless steel swivel holder	4	2.641-867.0				Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	
Automatic plastic hose reel incl. high-pressure hose	5	2.639-257.0	15 m			Spring-mounted and ready-to-use automatic hose reel for wall mounting. Simplifies handling of the high-pressure hose, shortens set-up times and increases occupational safety.	
Automatic hose reel, powder-coated steel / plastic	6	6.392-074.0	20 m			Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / syn- thetic material hose drum	7	6.392-083.0	20 m			Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated	8	6.392-106.0	20 m			Automatic hose reel of durable plastic. Painted steel bracket Suitable for 20 m high-pressure hose.	
Hose reel, automatic, basalt grey-coated	9	6.392-105.0	20 m			Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	$l_{\Box}$
Automatic hose reel, stainless steel, includes swivel holder	10	6.392-076.0	20 m			Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel	11	6.392-122.0	20 m			High-grade, automatic steel hose reel. Especially suitable fo use in the food industry. The material and finish provide for a corrossion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	

 $<sup>\</sup>blacksquare$  Included in the scope of supply.  $\qed$  Available accessories.





		Order no.	Flow rate	Inlet tempera-	Length	Length	Price	Description
Schläuche								
iSolar HP hose 7	1	6.392-978.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.
iSolar HP hose 10	2	6.392-977.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.
iSolar HP hose 14	3	6.392-976.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.

<sup>■</sup> Included in the scope of supply. 

Available accessories.









		1	T				_
		Order no.	Nozzle size		Price	Description	ı
Wet blasting attachment (without n	ozzle)						
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0				Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abra- sive to the high-pressure jet.	
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0				Paint, rust and scale removal made easy: Kärcher wet blast- ing attachment with flow control for adding blasting abra- sive to the high-pressure jet. Without flow control.	
Nozzle kits for wet jet unit							
Nozzle kit for wet jet unit 050	3	2.637-902.0	50			Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	
Boron carbide nozzle							
Boron carbide nozzle, for ma- chines up to 1,000 l/h	4	6.415-084.0	6 mm			In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	

<sup>■</sup> Included in the scope of supply. 

Available accessories.



















<u> </u>							
		Order no.			Price	Description	
Geka coupling				 1			
Geka connector with hose barb, R 3/4"	1	6.388-455.0				with hose liner	
Geka connector with inner thread, R 3/4"	2	6.388-473.0				with female thread	
Suction filter							
Water suction filter	3	6.414-956.0				Suitable for ponds, storage tanks or similar, polyamide filte casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	
Suction filter with check valve	4	4.730-012.0				Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Water fine filter							
Universal water fine filter, 25 $\mu m$	5	2.637-020.0				Water fine filter, mesh size 25 µm, max. temperature 50 °C. Protects the machine from small dirt particles in the water. Water volume up to 1200 l/h. 3/4" connection, with 1" adapter.	
Water fine filter, with adapter	6	4.730-102.0				Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	;- C
Water supply hose							
Water supply hose	7	4.440-038.0				NW 13 R1" / R 3/4", up to 30 °C	
Backflow check valve							
Backflow preventer	8	2.641-374.0				To prevent detergent getting into the drinking water cycle case of inlet at low-pressure hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakag protection	)
Other HP Accessories							
Starting current limiter	9	2.637-495.0				Reduces starting current in single-phase supply and protect line fuse.	is [

<sup>■</sup> Included in the scope of supply. 

Available accessories.









		Order no.	Flow rate		Price	Description	
Push-on washing brush				'			
Push-on wash brush	1	4.762-497.0				The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	
Rotating washing brush							
Rotating wash brush for < 800 l/h machines, nylon bristles	2	4.762-561.0	500 - 800 l/h			The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to $60^{\circ}$ C. (M 18 x 1.5, replaceable brush insert).	
Rotating wash brush for < 800 l/h machines, natural bristles	3	4.762-560.0	500 - 800 l/h			Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	

<sup>■</sup> Included in the scope of supply. 

Available accessories.