




OS 5.320 SV oscillating sprinkler

OS 5.320 SV oscillating sprinkler with adjustable width of spray and splash guard for convenient alignment. For medium-sized/large surfaces up to 320 m². Adjustable water volume (0-max.)

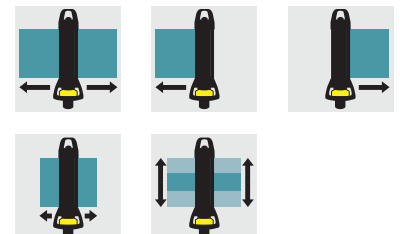

1 Continuous reach adjustment

- Precise watering.

3 Adjustable width of spray

- Different spray angles for targeted watering.

2 Loop for hanging the device integrated into the handle

- For simple storage/hanging.

4 Splash guard

- Convenient alignment



OS 5.320 SV oscillating sprinkler

- With splash guard for convenient alignment of the sprinkler without needing to get wet
- Continuous adjustment of the water volume (0-max.)
- Floor fixing
- Suspension brackets for secure storage
- Dirt-resistant, long-lasting gear
- Max. watering area (for 4 bar system pressure): 320 m
- Nozzle deactivation to reduce the width of spray by up to 60%

Technical data

Order no.	2.645-135.0	
EAN code	4039784426351	
Sprinkling area (2 bar)	20 - 190 m ²	
Sprinkling area (4 bar)	30 - 320 m ²	
Width of spray (2 bar)	m	5 × 12
Width of spray (4 bar)	m	6 × 16
Area coverage (2 bar)	m	5 / 16
Area coverage (4 bar)	m	6 / 20
Weight	kg	0.81
Weight incl. packaging	kg	0.93
Dimensions (L × W × H)	mm	546 × 160 × 88

OS 5.320 SV OSCILLATING SPRINKLER 2.645-135.0

KÄRCHER



		Order no.					Price	Description	
Hoses									
PrimoFlex® Premium hose 1/2" - 20 m	1	2.645-150.0						20 m PrimoFlex® Premium quality garden hose (1/2"). With patented dual-reinforcement technology. Contains no substances that are harmful to health. Bursting pressure: 50 bar. High temperature resistance from -20 to 65 °C.	<input type="checkbox"/>
Hose connection systems									
Premium universal hose coupling	2	2.645-195.0						Premium universal hose coupling made of metal. Comes with a robust hose clamp made of corrosion-free aluminium and soft plastic recessed grips. Compatible with all click systems.	<input type="checkbox"/>
Premium universal hose coupling with Aqua Stop	3	2.645-196.0						Premium universal hose coupling made of metal. Comes with Aqua Stop and a robust hose clamp made of corrosion-free aluminium and soft plastic recessed grips. Compatible with all click systems.	<input type="checkbox"/>
G3/4 tap adaptor with G1/2 reducer	4	2.645-006.0						Extremely tough tap connector 3/4" thread with 1/2" thread reducer. The reducer allows connection to two thread sizes. Compatible with all click systems.	<input type="checkbox"/>

☐ Available accessories.