

# ALP SERIES SUPER MATERIAL LIFT



# ALP SERIES SUPER MATERIAL LIFT

## Easy, convenient lifting

Mantall super-material lift, is a no power source, manually operated material lift. It is designed compact, lightweight, highly mobile and can be easily through standard doorways, while easily handling, Super-lifting, even if the weight of 454kg in weight, can also be upgraded to a maximum 3.48m, or 295kg to 7.95m.

ALP series material lift platform can be fully used in the construction, industry, storage, exhibition, stage construction, the advertising industry, central air-conditioning.

Only Mantall can provide you with so humanized design aerial work platform.



### Lowering easily

To make you lift quickly and convenient, Mantall super material lift can be operated by one person for lifting and moving the goods.






# ALP SERIES SUPER MATERIAL LIFT



## Multiple optional parts Lighthouse device

ALP series can be equipped with multiple fork, such as the lighthouse device can be used for emergency lighting and other uses

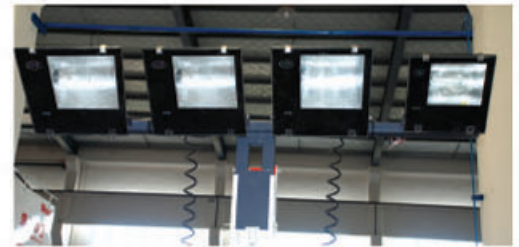

The stowed height of all ALP series product is lower than 2m. That makes users can cross standard doorways. The roller equipped on the back makes the transportation more convenient.



### Standard Features

- Incorporates a silent ratchet system
- Transportation wheels
- Roller wheels with brake
- Standard forks
- Telescopic mast design
- Solid Steel base

### Options Features

- Adjustable Forks
- Flat Forks
- Boom
- Pipe cross Forks
- Load Platform
- Anti-fall function

# ALP SERIES SUPER MATERIAL LIFT

Model	ALP-10	ALP-15	ALP-20	ALP-25
<b>Measurements</b>				
<b>Working height</b>				
(1)standard forks-up	3.48 m	5.00m	6.45m	7.95m
(2)standard forks-down	2.96 m	4.48m	5.93m	7.43m
Adjustable forks-up	3.48m	5.00m	6.45m	7.95m
Adjustable forks-down	2.96m	4.48m	5.93m	7.43m
Flat forks	2.96m	4.48m	—	—
Boom***	3.28m	4.76m	6.25m	7.42m
Load platform**-fork up	3.49m	4.98m	6.46m	7.94m
Load platform**-fork down	2.97m	4.46m	5.94m	7.42m
(3)Height-stowed	1.98m	1.98m	1.98m	1.98m
(4)Length-stowed	0.75m	0.75m	0.75m	0.83m
(5)Length-operating	2.2m	2.2m	2.2m	2.2m
(6)Width-stowed*	0.79m	0.79m	0.79m	0.79m
-stabilizers lowered	1.9m	1.9m	1.9m	1.9m
<b>Width-straddle base*</b>				
Minimum	0.80m	0.80m	—	—
Maximum	1.47m	1.47m	—	—
Maximum inside	1.27m	1.27m	—	—
(7)Ground clearance-center	0.05m	0.05m	0.05m	0.05m
Load height minimum	0.15m	0.15m	0.15m	0.15m
<b>Productivity</b>				
<b>Load capacity</b>				
46cm load center	454kg	363kg	363kg	295kg
61cm load center	454kg	363kg	272kg	204kg
1.07m load center	181kg	227kg	159kg	113kg
<b>Power</b>				
Power	Single speed winch			
<b>Weight</b>				
Standard	163kg	183kg	203kg	224kg

\*Outside dimensions.

\*\*For use with standard and adjustable forks only.

\*\*\*Measured from ground to bottom of shackle.

