

Be sure. **testo**



Intuitive air velocity and IAQ.

The new testo 440 combines versatility and maximum convenience.

The new testo 440 air velocity & IAQ measuring instrument: versatility in a compact format.

Welcome to a new era: the new testo 440 combines the benefits of a compact handheld device with intuitive measurement menus and a comprehensive selection of air velocity & IAQ probes. This means you have all measuring tasks on air conditioning and ventilation systems reliably under control.



Intuitive:

clearly structured measurement menus for volume flow, K-factor, degree of turbulence, heating/cooling output, mould indication and long-term measurement.

Wireless:

Bluetooth® probes for greater measuring convenience and a reduced tangle of cables in the measurement case.

Space-saving:

a universal handle for all probes – more applications, less equipment.

Clear overview:

all the essentials combined in a single handheld measuring instrument.
Parallel display of 3 measuring values; configuration and results at a glance.

Reliable and secure:


internal memory for up to 7500 measurement protocols, USB interface for data export and optional printout of measuring values. Operated with AA batteries.

The testo 440 air velocity & IAQ measuring instrument is available in two versions.

The testo 440 dP model version also has an integrated differential pressure sensor. This makes measurements at filters as well as Pitot tube and K-factor measurements possible.


The intuitive measurement menus: suitable for any application.

Based on our many years of experience in the development of cutting-edge measuring technology, we know precisely what you need to carry out your routine work. Which is why measurement menus for the essential air conditioning and ventilation applications are already pre-stored in the testo 440. These menus enable you to accomplish the relevant measuring task more quickly, more efficiently and more reliably.

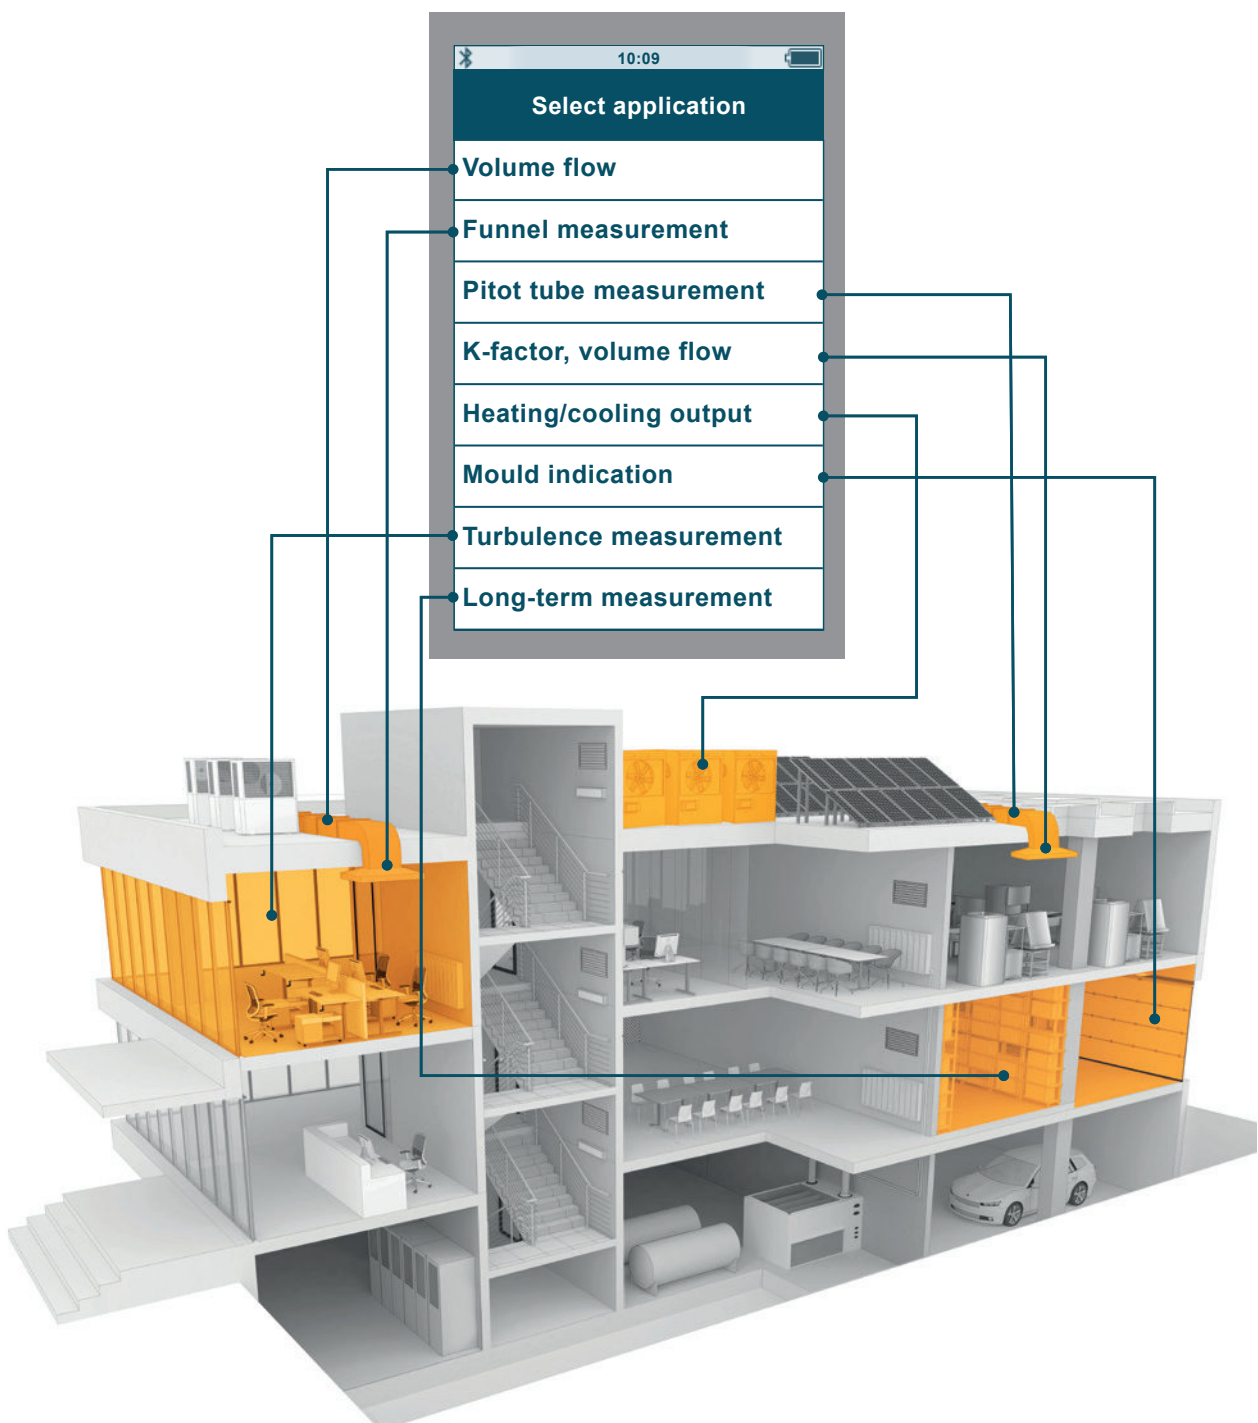

The testo 440 probe system: you'll never want to work any other way again.

Completely versatile: a universal handle for all air velocity & IAQ probes. This saves space and reduces the weight, enabling you to perform accurate measurements in any application. With the testo 440, you have all air conditioning and ventilation measurements systematically under control.

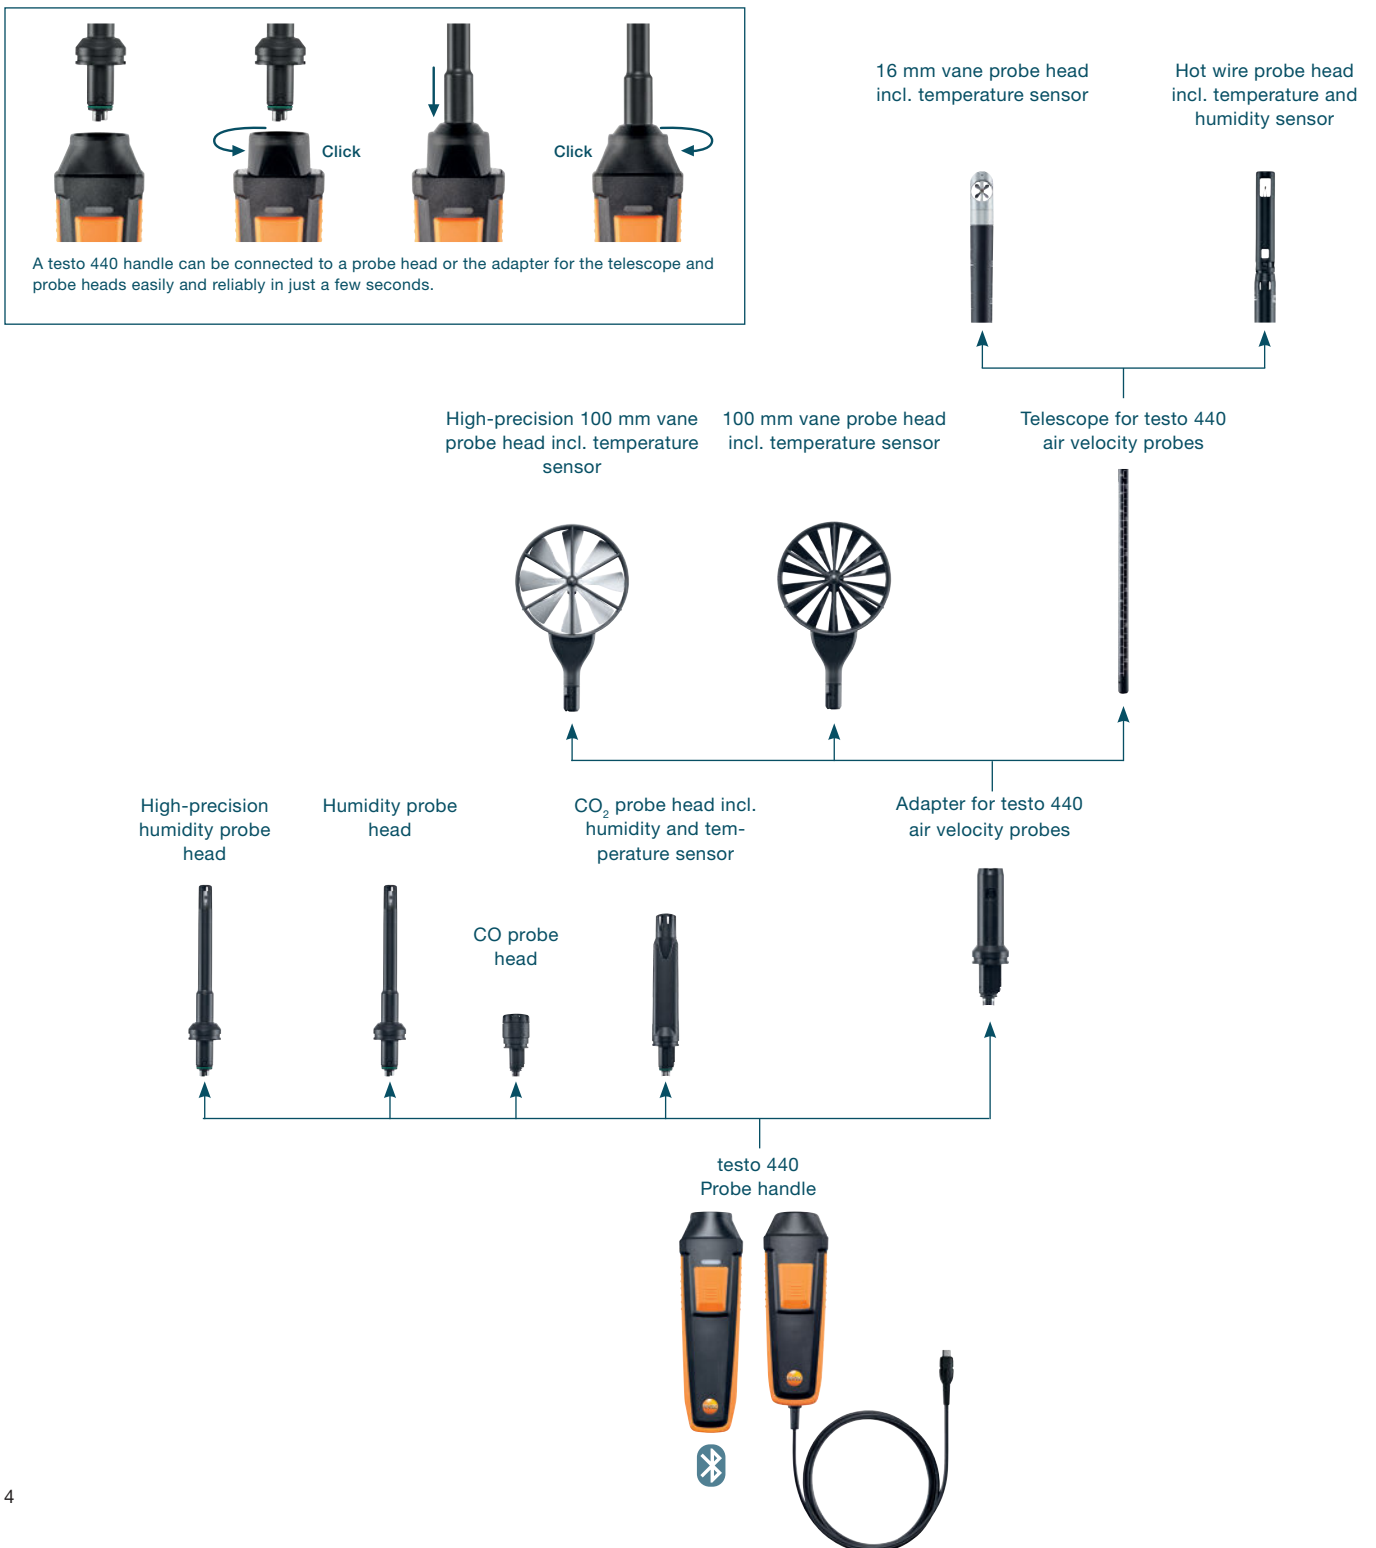

The testo 440 probe system: in ducts, at outlets, in rooms, at filters or with Pitot tubes.



All testo 440 air velocity probes for measurements in ducts have a scaled, extendible telescope (optionally extendible from 1 m to 2 m).



The 100 mm vane probe can be easily combined with the 90° angle and telescope, making measurements at ceiling outlets easier.



Do you need to carry out measurements in places where Bluetooth isn't possible? No problem: simply switch the probe head over from Bluetooth to the cable handle and you're ready.



With the testo 440 dP model, incl. differential pressure sensor, you can ensure that the filters in air conditioning systems are working properly and no contamination in the outdoor air gets into the indoor air.













For measuring the volume flow in the case of high flow velocities or heavily contaminated flow, we recommend the testo 440 dP and a Pitot tube.


Your measuring application, our solution: the right probe for every application.

Whatever air conditioning, ventilation or comfort level parameters you want to measure, our comprehensive range of air velocity & IAQ probes provides you with precise and reliable support with your tasks, enabling you to master any measuring challenge.







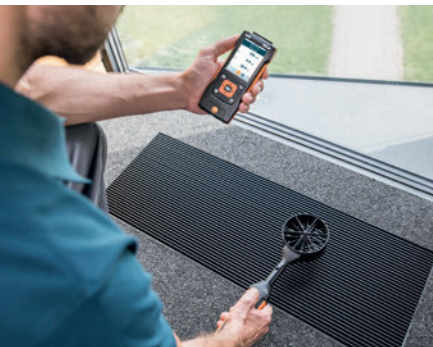

Air velocity measurement in ducts

| | |
|--|---|
|  | <p>Hot wire probe incl. temperature and humidity sensor</p> <p>Bluetooth/fixed cable  </p> |
|  | <p>Vane probe (Ø 16 mm) incl. temperature sensor</p> <p>Bluetooth/fixed cable  </p> |
|  | <p>Hot wire probe incl. temperature sensor</p> <p>fixed cable </p> |
|  | <p>Vane probe (Ø 16 mm)</p> <p>fixed cable </p> |






Air velocity measurement at outlets














| | |
|--|--|
|  | <p>High-precision vane probe (Ø 100 mm) incl. temperature sensor</p> <p>Bluetooth/fixed cable  </p> |
|  | <p>Vane probe (Ø 100 mm) incl. temperature sensor</p> <p>Bluetooth/fixed cable  </p> |














Heating


| | |
|---|---|
|  | <p>CO probe</p> <p>Bluetooth/fixed cable  </p> |
|---|---|



Intelligent calibration concept: only the probes need to be calibrated. Handles and measuring instrument still work and can continue to be used for measurements with a different probe.


| Comfort level measurement | |
|---|---|
|  | CO₂ probe incl. temperature and humidity sensor Bluetooth/fixed cable   |
|  | Turbulence probe fixed cable  |
|  | Humidity/temperature probe Bluetooth/fixed cable   |
|  | Lux probe fixed cable  |
|  | CO probe Bluetooth/fixed cable   |

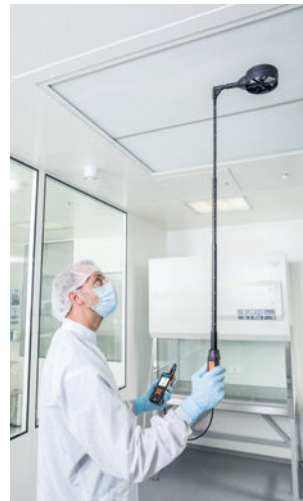

| Lab and cleanroom | |
|---|--|
|  | High-precision vane probe (Ø 100 mm) incl. temperature sensor Bluetooth/fixed cable   |
|  | High-precision humidity/temperature probe Bluetooth/fixed cable   |
|  | Hot wire probe incl. temperature and humidity sensor Bluetooth/fixed cable   |
|  | Fume hood probe fixed cable  |



| Industrial processes (drying) | |
|---|---|
|  | Robust humidity/temperature probe for temperatures up to +180 °C fixed cable  |

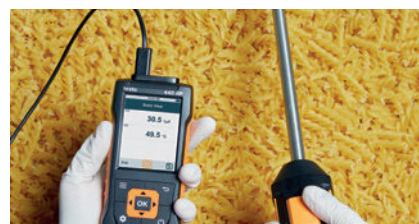


Measurement in ducts: precision in any cross-section.

In order for air conditioning and ventilation systems to run smoothly and efficiently, the flow velocity in the ventilation duct must be regularly checked. Indoor air quality also

depends on whether the air flow velocities in the duct correspond to the sizing. You can rely on testo 440 kits for measurements in ducts.

testo 440 Hot Wire Kit

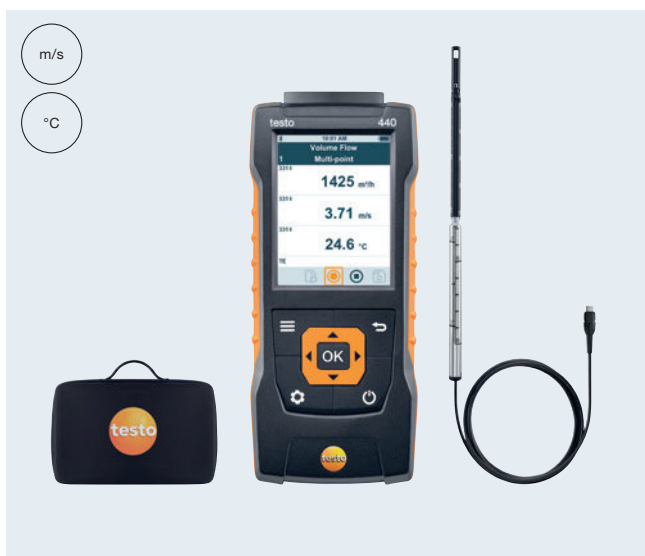


Comprising:

- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ Hot wire probe incl. temperature sensor, fixed cable (1.8 m) with telescope (0.85 m)
- ✓ Measurement menu, e.g. for determining the volume flow and timed and multi-point mean calculation
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4400

testo 440 16 mm Vane Kit

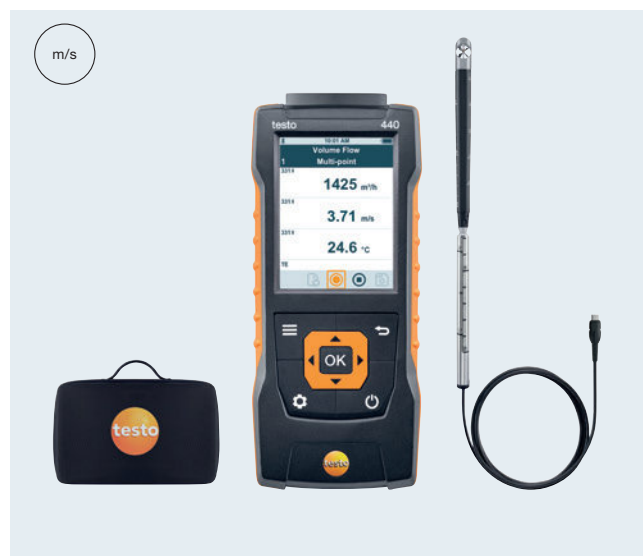

Comprising:

- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ Vane probe, fixed cable (1.8 m) with telescope (0.85 m)
- ✓ Measurement menu, e.g. for determining the volume flow and timed and multi-point mean calculation
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4401




Measurement at outlets: the optimum climate in no time at all.

For good indoor air quality, the incoming/outgoing air volume flows must be optimally adjusted. The 100 mm vane kit for the testo 440 now makes this task even simpler. With the optional funnel set or telescope, you can perform

measurements at outgoing air or ceiling outlets conveniently and safely. Our flow straightener helps you perform accurate measurement of turbulent flows.


testo 440 100 mm Vane Kit with BT

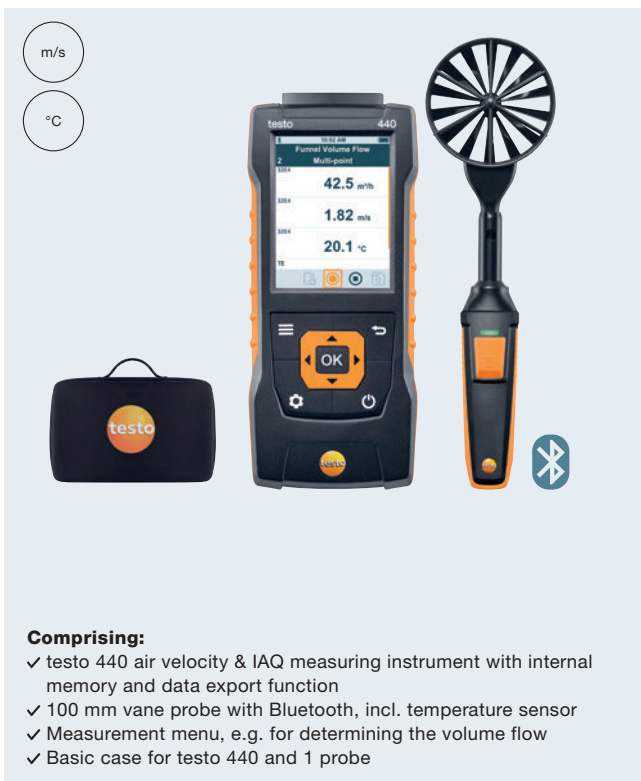





Comprising:

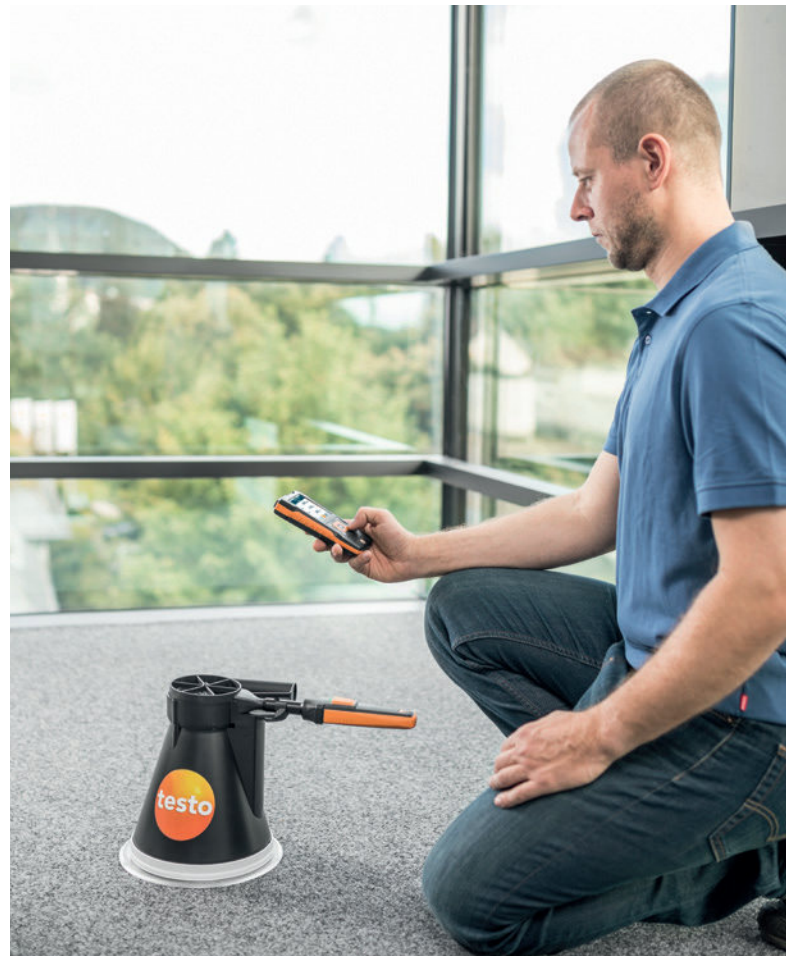- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ 100 mm vane probe with Bluetooth, incl. temperature sensor
- ✓ Measurement menu, e.g. for determining the volume flow
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4403




| Optional accessories | Order no. |
|---|-----------|
|  testovent 417 Funnel set | 0563 4170 |
|  testovent 417 volume flow straightener | 0554 4172 |

| Optional accessories | Order no. |
|---|-----------|
|  Extendible telescope for testo 440 air velocity probes (37.5 to 100 cm incl. 90° angle) | 0554 0960 |
|  testo 605i thermohygrometer with smartphone operation | 0560 1605 |

Measurement in ducts and at outlets: all air velocity & IAQ parameters at a glance.

Ventilation ducts, plate outlets or ceiling outlets:
with the testo 440 ComboKits you can always perform
precise and reliable measurements in ducts and at outlets.

testo 440 Air Flow ComboKit 1 with BT

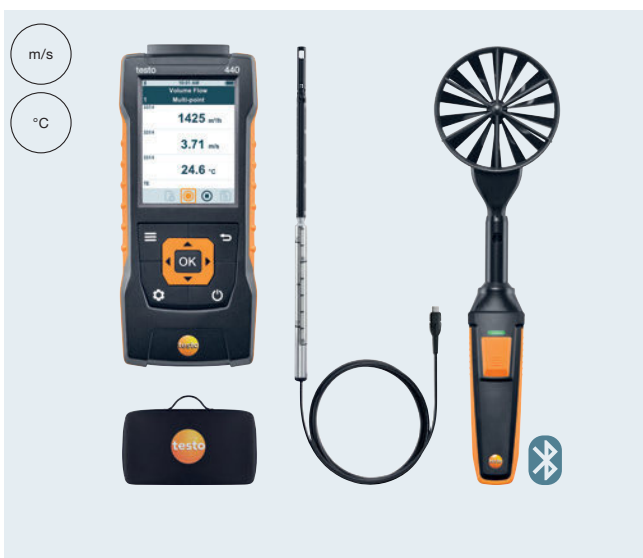


Comprising:

- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ 100 mm vane probe with Bluetooth, incl. temperature sensor
- ✓ Hot wire probe with telescope (0.85 m) incl. temperature sensor, fixed cable (1.8 m)
- ✓ Measurement menu, e.g. for determining the volume flow
- ✓ Combi case for testo 440 and multiple probes

Order no. 0563 4406

testo 440 Air Flow ComboKit 2 with BT

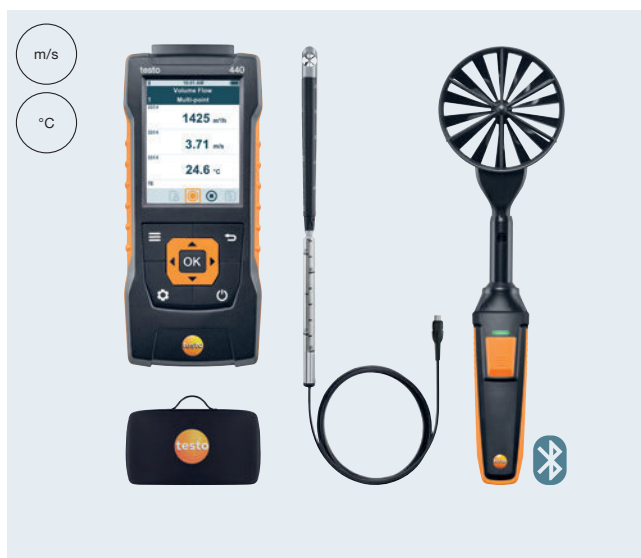

Comprising:

- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ 100 mm vane probe with Bluetooth, incl. temperature sensor
- ✓ 16 mm vane probe with telescope (0.85 m), fixed cable (1.8 m)
- ✓ Measurement menu, e.g. for determining the volume flow
- ✓ Combi case for testo 440 and multiple probes

Order no. 0563 4407



Measurement in ducts, at outlets and at filters: as versatile as your challenges.

With the testo 440 dP model version (incl. differential pressure sensor), even measurements at filters, as well as Pitot tube and K-factor measurements, can be carried out without any problems.

testo 440 delta P Air Flow ComboKit 1 with BT

Comprising:

- ✓ testo 440 dP air velocity & IAQ measuring instrument incl. differential pressure with internal memory and data export function
- ✓ Universal probe handle with Bluetooth
- ✓ Hot wire probe head incl. temperature and humidity sensor
- ✓ 100 mm vane probe head incl. temperature sensor
- ✓ Telescope (1 m) and 90° angle to fit both probes
- ✓ Combi case for testo 440 dP and multiple probes




Order no. 0563 4409


testo 440 delta P Air Flow ComboKit 2 with BT

Comprising:

- ✓ testo 440 dP air velocity & IAQ measuring instrument incl. differential pressure with internal memory and data export function
- ✓ Universal probe handle with Bluetooth
- ✓ 16 mm vane probe head
- ✓ 100 mm vane probe head incl. temperature sensor
- ✓ Humidity probe head incl. temperature sensor
- ✓ Telescope (1 m) and 90° angle for both probes
- ✓ Combi case for testo 440 dP and multiple probes

Order no. 0563 4410

| Optional accessories | Order no. |
|---|-----------|
|  Telescope extension (0.9 m) for testo 440 air velocity probes | 0554 0990 |
|  Stainless steel Pitot tube (length 500 mm, Ø 7 mm) | 0635 2045 |
|  CO probe head | 0632 1270 |

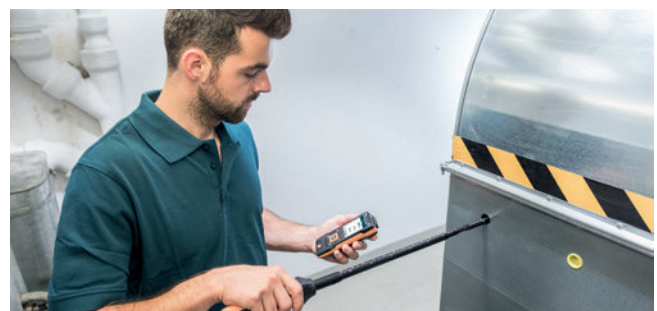

Measuring comfort level/indoor air quality: no task is too challenging.

Measurement of indoor air quality and comfort levels in workplaces enables precise adjustment of the indoor climate and reduces the risk of staff shortages due to illness.

These special testo 440 kits measure all relevant parameters: CO₂ content of the air, degree of turbulence, temperature, humidity and illuminance.



testo 440 Indoor Comfort ComboKit with BT

- m/s
- °C
- CO₂
- %RH

Comprising:

- ✓ testo 440 air velocity & IAQ measuring instrument with internal memory and data export function
- ✓ Turbulence probe (400 mm)
- ✓ CO₂ probe with Bluetooth, incl. temperature and humidity sensor
- ✓ Combi case for testo 440 and multiple probes

Order no. 0563 4408

testo 440 CO₂ Kit with BT

- ✓ testo 440 air velocity & IAQ measuring instrument
- ✓ CO₂ probe with Bluetooth, incl. temperature and humidity sensor
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4405

testo 440 Humidity Kit with BT

- ✓ testo 440 air velocity & IAQ measuring instrument
- ✓ Humidity and temperature probe with Bluetooth
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4404

testo 440 Lux Kit

- ✓ testo 440 air velocity & IAQ measuring instrument
- ✓ Lux probe
- ✓ Basic case for testo 440 and 1 probe

Order no. 0563 4402

No application too specialised: high-precision probes.


The perfect testo 440 probes are available even for control measurements of critical processes that call for the highest level of precision and robust equipment.


Ideal for industrial environments where high temperatures are common, and for labs where it is crucial to record even the smallest values with a high degree of accuracy.

CO probe



High-precision probe for measuring the CO concentration indoors (e.g. boiler rooms).


 with Bluetooth
Order no. 0632 1271


 fixed cable
Order no. 0632 1272

High-precision vane probe



High-precision vane, Ø 100 mm, incl. temperature sensor with low start-up speed (1 m/s) for flow velocity and temperature. Ideal for laminar flow measurements.


 with Bluetooth
Order no. 0635 9371


 fixed cable
Order no. 0635 9372

High-precision humidity/ temperature probe



High-precision probe with fast response time for measuring humidity in critical processes. Accuracy: $\pm(0.6\% \text{ RH} + 0.7\% \text{ of m.v.})$ in the range between 0 and 90% RH.


 with Bluetooth
Order no. 0636 9771

 fixed cable
Order no. 0636 9772

Fume hood probe




High-precision probe for measuring flow velocity and volume flow in fume hoods as per DIN EN 14175-3/4.

 fixed cable
Order no. 0635 1052

Robust humidity/temperature probe


















Measures humidity in tough environmental conditions up to +180 °C. Application in industrial outgoing air, bulk materials and climate cabinets.



















 fixed cable
Order no. 0636 9775

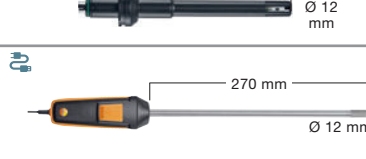

Overview of order details: digital probes.

| Probe type | Measuring range | Accuracy | Resolution | Order no. | |
|--|---|--|--|-------------------------------|-----------|
| Digital air velocity probes | | | | | |
| Hot wire probe with Bluetooth, incl. temperature and humidity sensor |  | | | 0635 1571 | |
| Hot wire probe, fixed cable, incl. temperature and humidity sensor |  | 0 to 50 m/s -20 to +70 °C 5 to +95% RH | ±(0.03 + 4% of m.v.) (0 to 20 m/s) ±(0.5 m/s + 5% of m.v.) (20.01 to 30 m/s) ±0.5 °C (0 to +70 °C) ±0.8 °C (-20 to 0 °C) ±3.0% RH (10 to 35% RH) ±2.0% RH (35 to 65% RH) ±3.0% RH (65 to 90% RH) ±5% RH (remaining meas. range) | 0.01 m/s 0.1 °C 0.1% RH | 0635 1572 |
| Hot wire probe head, incl. temperature and humidity sensor |  | | | 0635 1570 | |
| Vane probe (Ø 16 mm) with Bluetooth, incl. temperature sensor |  | | | 0635 9571 | |
| Vane probe (Ø 16 mm), fixed cable, incl. temperature sensor |  | 0.6 to 50 m/s -10 to +70 °C | ±(0.2 m/s + 1% of m.v.) (0.6 to 40 m/s) ±(0.2 m/s + 2% of m.v.) (40.1 to 50 m/s) ±1.8 °C | 0.1 m/s 0.1 °C | 0635 9572 |
| Vane probe head (Ø 16 mm), incl. temperature sensor |  | | | 0635 9570 | |
| Hot wire probe, fixed cable, incl. temperature sensor |  | 0 to 30 m/s -20 to +70 °C | ±(0.03 m/s + 4% of m.v.) (0 to 20 m/s) ±(0.5 m/s + 5% of m.v.) (20.01 to 30 m/s) ±0.5 °C | 0.01 m/s 0.1 °C | 0635 1032 |
| Vane probe (Ø 16 mm) fixed cable |  | 0.6 to 50 m/s | ±(0.2 m/s + 1% of m.v.) (0.6 to 40 m/s) ±(0.2 m/s + 2% of m.v.) (40.1 to 50 m/s) | 0.1 m/s | 0635 9532 |
| Fume hood probe, fixed cable |  | 0 to 5 m/s 0 to +50 °C | ±(0.02 m/s + 5% of m.v.) (0 to 5 m/s) ±0.5 °C | 0.01 m/s 0.1 °C | 0635 1052 |
| To measure flows in ducts with a large cross-section, we recommend an extension set (0554 0990). This enables the telescope to be extended to up to 2 m for all air velocity probes with an interchangeable handle. | | | | | |
| High-precision vane probe (Ø 100 mm) with Bluetooth, including temperature sensor |  | | | 0635 9371 | |
| High-precision vane probe (Ø 100 mm), fixed cable, incl. temperature sensor |  | 0.1 to 15 m/s -20 to +70 °C | ±(0.1 m/s + 1.5% of m.v.) (0.1 to 15 m/s) ±0.5 °C | 0.01 m/s 0.1 °C | 0635 9372 |
| High-precision vane probe head (Ø 100 mm), incl. temperature sensor |  | | | 0635 9370 | |
| Vane probe (Ø 100 mm) with Bluetooth, incl. temperature sensor |  | | | 0635 9431 | |
| Vane probe (Ø 100 mm), fixed cable, incl. temperature sensor |  | 0.3 to 35 m/s -20 to +70 °C | ±(0.1 m/s + 1.5% of m.v.) (0.3 to 20 m/s) ±(0.2 m/s + 1.5% of m.v.) (20.01 to 35 m/s) ±0.5 °C | 0.01 m/s 0.1 °C | 0635 9432 |
| Vane probe head (Ø 100 mm), incl. temperature sensor |  | | | 0635 9430 | |
| For convenient ceiling measurements, the telescope with 90° angle (0550 0960) has been developed. It can simply be fitted to the 100 mm vane probes. | | | | | |










¹⁾ For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111) in conjunction with an adapter (order no. 0554 2160).

| Probe type | | Measuring range | Accuracy | Resolution | Order no. |
|---|--|---|--|--|-----------|
| Digital humidity probes | | | | | |
| Humidity/temperature probe with Bluetooth |  | | | | 0636 9731 |
| Humidity/temperature probe, fixed cable |  | 0 to 100% RH -20 to +70 °C | ±2% RH (5 to 90% RH) ±0.5 °C | 0.1% RH 0.1 °C | 0636 9732 |
| Humidity/temperature probe head |  | | | | 0636 9730 |
| High-precision humidity/temperature probe with Bluetooth |  | | | | 0636 9771 |
| High-precision humidity/temperature probe, fixed cable |  | 0 to 100% RH -20 to +70 °C | ±(0.6% RH + 0.7% of m.v.) (0 to 90% RH) ±(1.0% RH + 0.7% of m.v.) (90 to 100% RH) ±0.3 °C (15 to 30 °C) ±0.5 °C (remaining meas. range) | 0.01% RH 0.1 °C | 0636 9772 |
| High-precision humidity/temperature probe head |  | | | | 0636 9770 |
| Robust humidity/temperature probe for temperatures up to +180 °C, fixed cable |  | 0 to 100% RH -20 to +180 °C | ±3% RH (0 to 2% RH) ±2% RH (2.1 to 98% RH) ±3% RH (98.1 to 100% RH) ±0.5 °C (-20 to 0 °C) ±0.4 °C (0.1 to +50 °C) ±0.5 °C (+50.1 to +180 °C) | 0.1% RH 0.1 °C | 0636 9775 |
| Digital comfort probes | | | | | |
| Turbulence probe, fixed cable |  | 0 to +5 m/s 0 to +50 °C | ±(0.03 m/s + 4% of m.v.) (0 to 5 m/s) ±0.5 °C | 0.01 m/s 0.1 °C | 0628 0152 |
| Lux probe, fixed cable |  | 0 to 100,000 lux | Class C According to DIN 5032-7 f1 = 6% = V-Lambda f2 = 6% cos | 0.1 lux (< 10,000 lux) 1 lux (≥ 10,000 lux) | 0635 0551 |
| CO ₂ probe with Bluetooth, incl. temperature and humidity sensor |  | | | | 0632 1551 |
| CO ₂ probe, fixed cable, incl. temperature and humidity sensor |  | 0 to 10,000 ppm CO ₂ 5 to +95% RH -0 to +50 °C | ±(50 ppm + 3% of m.v.) (0 to 5000 ppm) ±(100 ppm + 5% of m.v.) (5001 to 10,000 ppm) ±3% RH (10 to 35% RH) ±2% RH (35 to 65% RH) ±3% RH (65 to 90% RH) ±5% RH (remaining meas. range) ±0.5 °C | 1 ppm 0.1% RH 0.1 °C | 0632 1552 |
| CO ₂ probe head incl. temperature and humidity sensor |  | | | | 0632 1550 |
| CO probe with Bluetooth |  | | | | 0632 1271 |
| CO probe, fixed cable |  | 0 to 500 ppm | ±3 ppm (0 to 30 ppm) ±10% of m.v. (30.1 to 500 ppm) | 0.1 ppm | 0632 1272 |
| CO probe head |  | | | | 0632 1270 |
| Probe handle and adapter | | | | | |
| Cable handle for connecting testo 440 probe heads |  | | | | 0554 2222 |
| Bluetooth handle for connecting testo 440 probe heads |  | | | | 0554 1111 |
| Handle adapter for connecting testo 440 air velocity probes |  | | | | 0554 2160 |

²⁾ For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111).

Overview of order details: Kits, measuring instruments, probes and accessories.

| testo 440 / testo 440 dP kits | Order no. |
|--|-----------|
| testo 440 Hot Wire Kit | 0563 4400 |
| testo 440 16 mm Vane Kit | 0563 4401 |
| testo 440 Lux Kit | 0563 4402 |
| testo 440 100 mm Vane Kit with BT | 0563 4403 |
| testo 440 Humidity Kit with BT | 0563 4404 |
| testo 440 CO ₂ Kit with BT | 0563 4405 |
| testo 440 Air Flow ComboKit 1 with BT | 0563 4406 |
| testo 440 Air Flow ComboKit 2 with BT | 0563 4407 |
| testo 440 Indoor Comfort ComboKit with BT | 0563 4408 |
| testo 440 delta P Air Flow ComboKit 1 with BT | 0563 4409 |
| testo 440 delta P Air Flow ComboKit 2 with BT | 0563 4410 |
| testo 440 instruments | Order no. |
|  testo 440 Air velocity & IAQ measuring instrument | 0560 4401 |
|  testo 440 dP Air velocity & IAQ measuring instrument incl. differential pressure | 0560 4402 |

| Accessories | Order no. |
|---|-----------|
|  Extendible telescope for testo 440 flow probes (37.5 to 100 cm incl. 90° angle) | 0554 0960 |
|  Service case for volume flow measurement | 0516 4900 |
|  Combi case for testo 440 and multiple probes | 0516 4401 |
| Temperature probe | Order no. |
|  Fast-reaction surface probe (TC type K) | 0602 0393 |
|  Robust air probe, TC type K, fixed cable | 0602 1793 |
|  Surface probe with widened measuring tip (TC type K) | 0602 1993 |
|  Temperature probe with Velcro strip (TC type K) | 0628 0020 |
|  Robust air temperature probe (NTC) | 0615 1712 |
|  Clamp probe (NTC) for measurements on pipes (Ø 6 - 35 mm) | 0615 5505 |
|  Watertight immersion/penetration probe (NTC) | 0615 1212 |

Further accessories and DAkkS and ISO certificates can be found on www.testo.com



TESTO SMI SDN BHD (REGIONAL OFFICE)
 Singapore, Malaysia & Indonesia
 100.3.017, 129 Offices, Block J,
 Jaya One, No.72A, Jalan Universiti,
 46200 Petaling Jaya, Selangor,
 Malaysia Email : info@testo.my
 Tel : +603 7932 5990
 Fax : +603 7932 3995

www.testo.com