



EVERSHINE
GROUP OF COMPANIES

Sole Distributor
for

SULO

4-Wheeled Bin Systems

MGB 660



Product Details

MATERIAL AND DESIGN

- Polymer components injection moulded from specially designed HDPE
- Resistant to decay, frost, heat and many chemicals
- Special UV-stabilisation provides excellent ageing characteristics
- Metal components are corrosion resistant
- Quiet-running solid rubber tyres
- Compatible with identification and weighing systems
- Fitted as standard with chip nest in accordance with RAL GZ 951/1

QUALITY

- Certified according to EN 840 and RAL GZ 951/1
- Certified management systems according to DIN EN ISO 9001 and DIN EN ISO 14001 and BS OHSAS 18001:2007
- Constant supervision of quality through own laboratory and independent institutes
- High quality materials and most advanced manufacturing processes for long service life
- All container parts are recyclable
- Additives are cadmium free and environmentally friendly

SAFETY AND HANDLING


- Large lifting trunnions with steel insert for increased safety during emptying
- Double angle rail for highest safety during emptying with comb lifting devices
- Easy-grip handles on all sides of the body
- Safe, easy handling, even with heavy loads
- Reinforced base and front and rear panels for highest stability
- Various wheel assembly configurations for different applications
- Special ribs prevent containers from becoming jammed when stacked
- Easy-grip handles on the front and sides of lid for easy lifting
- Stable and lightweight lid
- Rounded lid profile for improved rainwater dispersal
- No water ingress when opening the lid
- Easy to clean due to smooth surfaces and rounded internal corners

COLOURS

- Standard colours: grey, green, brown, blue
- Option colours: red, yellow, white, orange
- Special colours are available on request

SPECIFICATIONS

NOMINAL VOLUME (L)	EMPTY WEIGHT (KG)	MAX. FILLING WEIGHT (KG)	APPROVED TOTAL WEIGHT (KG)
660	43,0	264,0	310,0

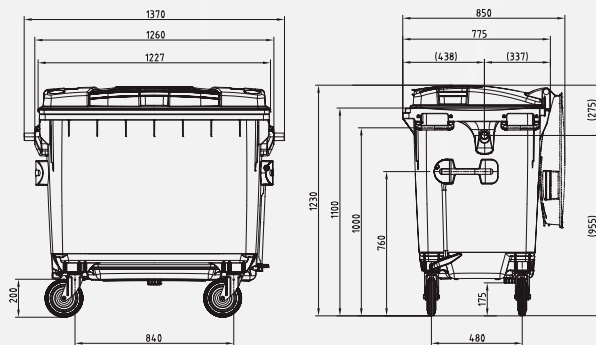

Quality Assurance - Straight Dropping Test
- Load 350kg



Testing height: 2.5m / Load: 350kg



Testing : 4 times straight dropping

All dimensions may vary due to production conditions. The specified weights are a rounded average based on the standard specification. The actual weight may differ due to production conditions and different specifications.

