




### Instructions

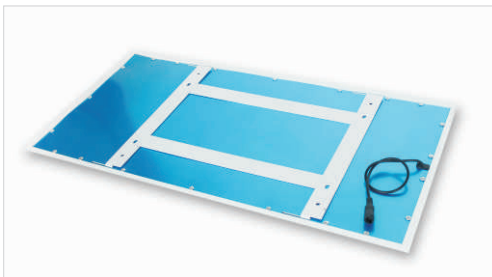

### Description

1. Constructure: IP20, Slope edge frame;
2. Power Input: AC200-240V/AC100-240V 50/60Hz;
3. Outside Materials: Aluminum frame + PS (or PC) diffuser plate;
4. Inside Materials: PMMA plate + LEDs;
5. Size: 315\*615\*12mm, 315\*1215\*12mm  
615\*615\*12mm, 615\*1215\*12mm;
6. White Lighting: 3000K-6500K; (full lighting wavelength);
7. Dimmable: Triac / 0-10V / 1-10V / Dali available;
8. Installation: Fixed back bracket on Sandwich Panels by screws, then bracket holds lighting fixture by 4 hooks.

### Parameters

Fixture Size		315*615*12mm	615*615*12mm			315*1215*12mm		615*1215*12mm
Watt		30W	40W	60W	40W	60W	72W	
Lighting efficiency	90-100lm/W	2700-3000lm	3600-4000lm	5400-6000lm	3600-4000lm	5400-6000lm	6500-7200lm	
	110-120lm/W	3300-3600lm	4400-4800lm	6600-7200lm	4400-4800lm	6600-7200lm	7900-8600lm	
Lighting Angle		120°						
CRI		Ra>80/Ra>90foroptional						
Color Temperature		3000-6500K for options, full light wavelength						
Voltage Input		AC200-240V/100-240V, 50~60Hz						
Dimmable		Triac/0-10V/1-10V/Dali for options						