

Passive Analog HD-Video Transceiver

Real-time transmission , no power required, transmission distance to 500m



C 3101VB103




- Passive, no power required;
- Plug-and-play; Real-time and stable HDCVI/HDTVI/AHD/Analog transmission result;
- 500m matches the passive transceiver; 650m matches active transceiver;
- Excellent anti-interference , surge protection, ESD and lightning protection capability;
- ABS (Acrylonitrile-Butadiene-Styrene) shell; built-in extended coaxial cable, convenient for intensive engineering projects;
- Bayonet Nut Connector (BNC); press-fitting UTP terminal.



Specification

Item	C 3101VB103
Video Port	1 channel
Maximum Transmission Distance (with passive product)	HDCVI-720P: 370m;1080P:200m; HDTVI-720P: 200m;1080P:200m; AHD-720P/960P: 330m; 1080P:300m Analog Video: 500m;
Coaxial Video Port	Male BNC Port
Twisted-pair Video Port	2-channel screw push terminal
Video Compatibility	HDCVI/HDTVI/AHD, PAL/NTSC/SECAM Video
Bandwidth	0 ~ 75MHz
Anti-interference	>60dB
Surge Protection	4KV(different mode) Per: IEC61000-4-5
ESD	Level 3,1a Contact Discharge, Level 3,1b Air Discharge
Working Temperature	-10 ~ 55°C
Storage Temperature	-20°C~70°C
Humidity (Non-condensing)	0 ~ 95%
Out Shell	ABS
Weight	23g

Application

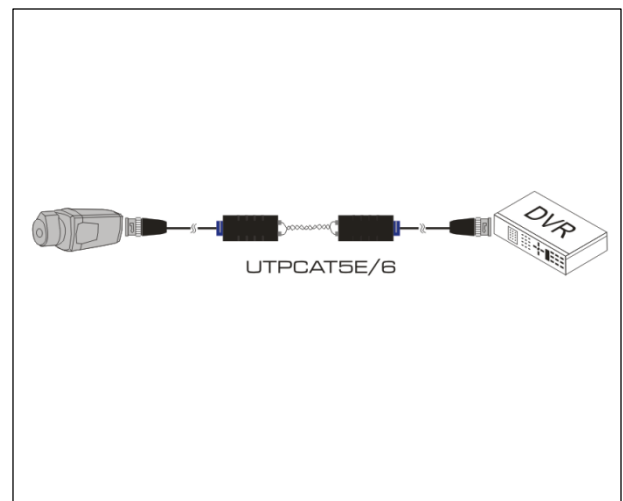

Package List

Designation	Quantity
C 3101VB103	2
User Manual	1

Related Products

Designation	Model
Passive Analog HD-Video Transceiver	C 3101VB103