Dewpoint®

Air Conditioner Drainage Pump



Fluenz III







Features



Stylist design



High efficiency and silent operation



High stability and durability motor

Unique inlet tube design, has the filtration function to prevent drainage blockage



Innovative design with reverse flowing valve, effectively prevents water back flow



The best PU material effectively isolating the device from outside and inside temperature change, preventing damage to the device which could cause leakages




Simple installation, user friendly

Specification & Dimension

Series		FLUENZ III
Model		DDP1060CM
Type		MECHANICAL
Control Method		Mechanical Floating Ball
Power Source	V/Ph/Hz	220-240/1/50
Current	А	0.25
Power	W	27
Maximum Pump Lift	m	3
Sound Pressure Level	dB	36 ± 3
Drainage Hose Size / Length	inch/m	1/4" / 10
Coverage	Btu/hr	9,000 – 60,000
Dimension (WxDxH)	mm	175 x 108 x 150
Weight	kg	1.7

Pump Lift vs Flow Rate

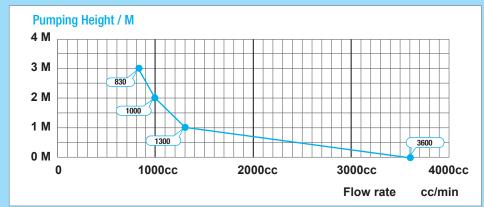

Note: Due to our policy of innovation, all product specifications are subject to change without prior notice.



Please use independent power point

The pump needs to be on 24 hours power supply to avoid overflow

www.daikin.com.my

• Sarawak Tel: 082-333 299

DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

(Formerly known as Group Associated (C & L) Sdn. Bhd.)

Melaka

Head Office:

Tel: 03-7953 8388 Fax: 03-7956 4371 General **Spare Parts** Tel: 03-7953 8399 Fax: 03-7954 6012

Branches: • Kedah

Tel: 04-730 5670 • Johor Tel: 07-557 7788 Tel: 04-331 1670 • Pahang Tel: 09-567 6778 Penang Perak Tel: 05-548 2307 • Kelantan Tel: 09-747 4578 • Negeri Sembilan Tel: 06-768 8969 Sabah Tel: 088-722 194

Tel: 06-288 1133 Dewpoint and VDAIKIN are marketed by: DAIKIN MALAYSIA SALES & SERVICE SDN. BHD.

Catalogue No: DDP1060-0117-B