



► (RT) Standard Bayonet Type
RT-M05X05-L030-K02

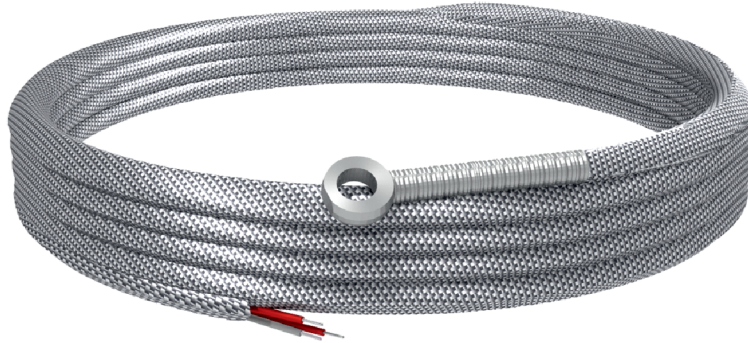


- Max. operating temperature : -50 °C / +400 °C
- Standard cable types : Fiber glass + fiber glass + braided wire
- Sensor type : DIN/EN60751 Class "B" 1 x PT-100
- Protection tube material : Nickel coated brass

► Technical drawing

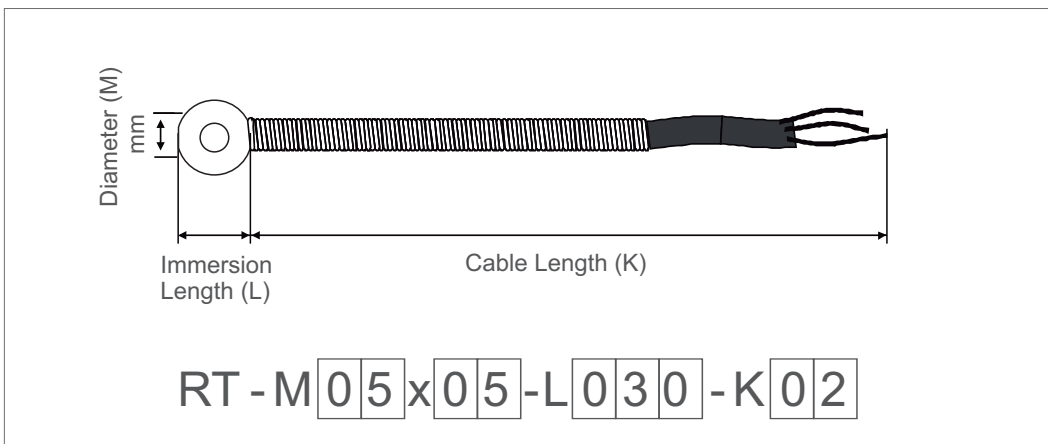

PT-100 Connections



- Diameter (M) : 05 x 05 mm
- Immersion Length (L) : 30 mm
- Cable Length (K) : 2 meter