



Electromechanical relay modules multi-channel, input rated: 24 Vac/dc, input channels: 4 pluggable, contact type: SPDT

Series	
Code	XR041EAD
Type	R41EAD
HS code	85364190, 85364190
INPUT TECHNICAL DATA	
Input rated voltage	24 Vac/dc $\pm 10\%$
Pull in / drop out voltage type	16.8 V / 2.4 V
Current consumption	22 mA $\pm 10\%$
Turn ON / OFF time	10 ms / 5 ms
Protection circuit	Free-wheel diode, Reverse polarity
Connection terminal	2.5 mm ² screw
Input channels	4 pluggable
OUTPUT TECHNICAL DATA	
Contact type	SPDT, 1 form C, AgSnO ₂
Nominal current	16 A (250 Vac)
Continuous current	16 A
Connection type	2.5 mm ² (AWG26-14), screw type
GENERAL TECHNICAL DATA	
Operating temperature range	-20...+70°C
Input / output isolation	2.5 kVac / 60 s
Protection degree	IP 00
Overvoltage category / pollution degree	II / 2
Status indication	LED "DC OK" / LED "Relay"
Housing material	UL94V-0 plastic material
Dimensions (LxHxD)	70x93x75 mm
Approximate weight	192 g
Mounting information	on a rail, side by side
ACCESSORIES	
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB
Spare part relay	8904073
APPROVALS AND MARKINGS	CE

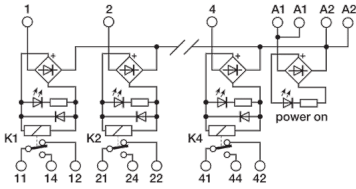

*: Pluggable relay | *: AC/DC input voltage | *: SPDT contact | *: Allow PNP and NPN command |
1: Manufacturer and model of the relay is not binding, technical data are to be considered typical |

DESCRIZIONE DEL PRODOTTO

Electromechanical relay modules multi-channel, input rated: 24 Vac/dc, input channels: 4 pluggable, contact type: SPDT