



## OMX 39PM




- Input 0...5 mA; 0...20 mA; 4...20 mA  
0...2 V; 0...5 V; 0...10 V
- Output 0...5 mA, 0...20 mA, 4...20 mA, ±20 mA  
0...2 V, 0...5 V, 0...10 V, ±10 V
- Galvanic separation 3.75 kVAC
- Power supply 10...30 V AC/DC; 80...250 V AC/DC

### Option

Excitation

### ISOLATED TRANSMITTER - SEPARATOR

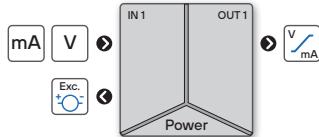

The OMX 39 model series are low-price and simple analog transmitters with mounting on a 35 mm wide DIN rail.

Type OMX 39PM is a galvanic separator.

The transmitters have galvanic separation with isolation voltage of 600 V and thus they are suitable as primary isolation for majority of industrial applications.

### OPERATION

The transmitter is designed for simple measurements without further control.

### CALIBRATION

By trimmers accessible from the face of the transmitter you may adjust the range of the output signal within the range of ±10 %.

### OPTION


**EXCITATION** with continuously adjustable value is suitable for feeding sensors and transmitters.

## TECHNICAL DATA

INPUT		INSTRUMENT SPECIFICATION		POWER SUPPLY	
No. of inputs	1 The range is fixed	TC	50 ppm/°C	Range	10...30 V AC/DC, ±10 %, PF ≥ 0.4, $I_{\text{SP}} < 75 \text{ A}/1\text{ms}$ , isolated
PM Range	0...5 mA      < 400 mV 0...20 mA     < 400 mV 4...20 mA     < 400 mV 0...2 V        0.5 MΩ 0...5 V        0.5 MΩ 0...10 V      0.5 MΩ	Input I Input I Input I Input U Input U Input U	Accuracy      ±0.1% of FS Rate            continuous measurement Overload       10x (t < 30 ms), 2x Calibration    not valid for > 250 V and 5 A ranges		80...250 V AC/DC, ±10 %, PF ≥ 0.4, $I_{\text{SP}} < 40 \text{ A}/1\text{ms}$ , isolated Protection by fuse inside the device
				Consumption	< 2.4 W / 2.6 VA
ANALOG OUTPUTS		MECHANIC PROPERTIES		OPERATING CONDITIONS	
No. of outputs	1	Material	PA 66, incombustible UL 94 V-I, blue	Connection	connector terminal blocks, section < 2.5 mm²
Type	isolated, fixed setting	Dimensions	22 x 98 x 113 mm (w x h x d)	Stabilization period	within 5 minutes after switch-on
TC	25 ppm/°C	Installation	on DIN rail, width 35 mm	Working temperat.	-20°...60°C
Rate	response to change of value < 1 ms			Storage temperat.	-20°...85°C
Ranges	0...2 / 10 V, ±10 V, resistive load ≥ 1 kΩ 0...5 / 20 mA, 4...20 mA, ±20 mA, compensation < 600 Ω/12 V			Working humidity	< 95 % r.v., non condensing
EXCITATION				Protection	IP20
Adjustable	5...24 VDC, < 1.2 W, isolated			Construction	safety class I
				El. safety	EN 61010-1, A2
				Dielectric strength	4 kVAC per 1 min test between supply and input 4 kVAC per 1 min test between supply and analog output 3.75 kVAC per 1 min test between input and analog output
				Insulation resist.*	for pollution degree II, measuring cat. II power supply > 600 V (PI), 300 V (DI) input, output > 500 V (PI), 250 V (DI)
				EMC	EN 61326-1, Industrial area
				Seismic qualification	IEC/IEEE 60990-344 Edition 1.0, 2020, par. 6, 9
				Mechanical resistance	EN 60068-2-6 ed. 2:2008

\* PI - Primary insulation, DI - Double insulation

## CONNECTION

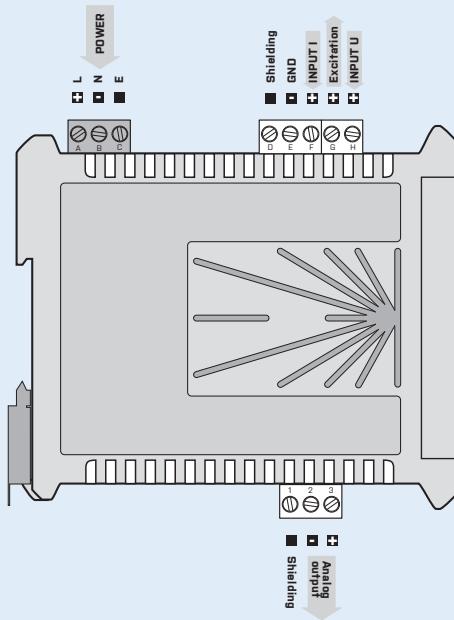

## ORDER CODE

### OMX 39PM

Power supply	10...30 V AC/DC	<b>0</b>		
	80...250 V AC/DC	<b>1</b>		
Measuring range	0...5 mA	<b>A</b>		
	0...20 mA	<b>B</b>		
	4...20 mA	<b>C</b>		
	0...2 V	<b>D</b>		
	0...5 V	<b>E</b>		
	0...10 V	<b>F</b>		
Excitation	no	<b>0</b>		
	yes	<b>1</b>		
Analog output	0...2 V		<b>1</b>	
	0...5 V		<b>2</b>	
	0...10 V		<b>3</b>	
	0...20 mA		<b>4</b>	
	4...20 mA		<b>5</b>	
	±10 V		<b>6</b>	
	±20 mA		<b>7</b>	
	0...5 mA		<b>8</b>	

Basic configuration of the instrument is indicated in bold.