


Detection Pattern (max / min)




Detection area*

100%	2m	3.5m
50%	1m	2m

*These data were tested by a 165cm height person and his walking speed is 1m/s.

MC054V RC Dimming Function / Remote Control Microwave Sensor

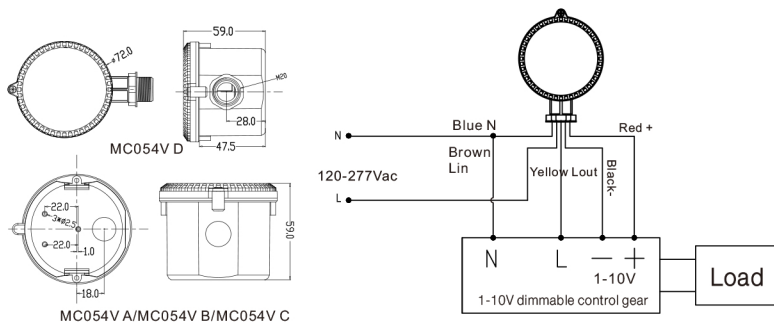

SPECIFICATIONS

Operating voltage	120/277Vac
Rated Load	120Vac 4A electronic/magnetic ballast 277Vac 3A electronic/magnetic ballast
HF system	5.8GHz±75MHz, ISM wave band
Transmitting power	<0.5mW
Power consumption	<1W(stand-by)
Detection Area(Radius)	8m Max.
Max. Mounting height	15m
Hold time	Sensor: 5s/30s/1min/3min/20min/30min Remote control: 5s/30s/1min/3min/5min/10min/20min/30min
Stand-by Period	Sensor: 0s/1min/3min/10min/30min/∞ Remote control: 0s/10s/1min/3min/5min/10min/30min/∞
Stand-by DIM Level	Sensor: 10%/20%/30%/50%
Daylight sensor	Sensor: 5lux/15lux/30lux/50lux/100lux/150lux/Disable
Operating temperature	-35°C ~55°C
IP rating	IP65