

DS-7100NI-Q1 SERIES NVR



Features and Functions

Video Input and Transmission

- Connectable to the third-party network cameras
- 4/8 network cameras can be connected

Compression and Recording

- H.265+/H.265 compression effectively reduces the storage space and costs
- Full channel recording at up to 4 MP resolution

HD Video Output

- HDMI/VGA output at 1080p resolution

Storage and Playback

- 1-ch playback at 4 MP resolution or 2-ch at 1080p resolution
- 1 SATA hard disk can be connected with 6TB capacity

Smart Function

- Supports line crossing and intrusion detection
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency

Network & Ethernet Access


- Hik-Connect for easy network management
- 100 Mbps Ethernet network interface



Specifications

| Model | | DS-7104NI-Q1 | DS-7108NI-Q1 |
|---------------------------|---------------------------------|---|--------------|
| Video input | IP video input | 4-ch | 8-ch |
| | | Up to 4 MP resolution | |
| Network | Incoming bandwidth | 40 Mbps | 60 Mbps |
| | Outgoing bandwidth | 60 Mbps | |
| Video output | Recording resolution | 4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | |
| | HDMI/VGA output resolution | 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | |
| Decoding | Decoding format | H.265+/H.265/ H.264+/H.264 | |
| | Live view / Playback resolution | 4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | |
| | Synchronous playback | 4-ch | 8-ch |
| | Capability | 1-ch @ 4 MP / 2-ch @ 1080p | |
| Network management | Network protocols | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP™ | |
| Hard disk | SATA | 1 SATA interface | |
| | Capacity | Up to 6TB capacity for each disk | |
| External interface | Network interface | 1, RJ-45 10/100Mbps self-adaptive Ethernet interface | |
| | USB interface | 2 × USB 2.0 | |
| General | Power supply | 12 VDC | |
| | Power | ≤ 18W | |
| | Consumption (without hard disk) | ≤ 10 W | |
| | Working temperature | -10 to +55° C (+14 to +131° F) | |
| | Working humidity | 10 to 90 % | |
| | Chassis | 1U chassis | |
| | Dimensions (W × D × H) | 200 × 205 × 48 mm (7.9" × 8.1" × 1.9") | |
| Weight(without hard disk) | ≤ 1 kg (2.2 lb) | | |

Physical Interfaces

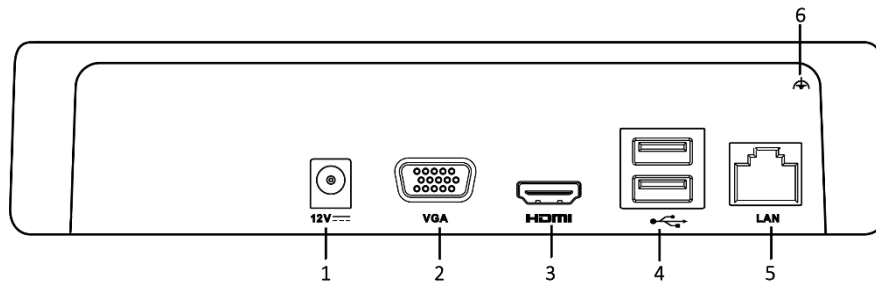

| Index | Name | Index | Name |
|-------|----------------|-------|-----------------------|
| 1 | Power Supply | 4 | USB Interfaces |
| 2 | VGA Interface | 5 | LAN Network Interface |
| 3 | HDMI Interface | 6 | Ground |

Available Models

DS-7104NI-Q1, DS-7108NI-Q1

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com