


## DS-D5050UC 49.5" 4K Monitor



### Key Features

- High reliability and stability components
- Fashion appearance, ultra-narrow bezel
- 4K resolution is 4 times 1080P can own broader view and more abundant details
- 16.7 million color, display picture perfectly
- Horizontal 178°, Vertical 178°
- Build-in loudspeaker
- Plastic casing

### Interfaces

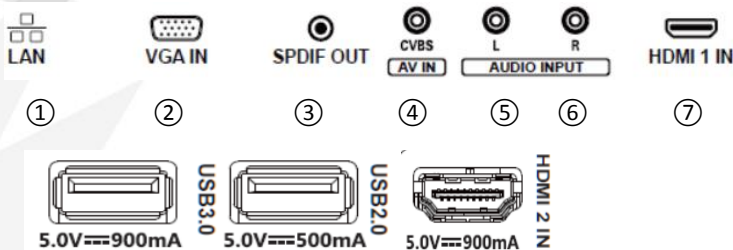

| NO. | Description       | Position |
|-----|-------------------|----------|
| 1   | LAN               | Bottom   |
| 2   | VGA               |          |
| 3   | SPDIF OUT         |          |
| 4   | CVBS/AV IN        |          |
| 5   | L AUDIO RCA INPUT |          |
| 6   | R AUDIO RCA INPUT |          |
| 7   | HDMI 1 IN         |          |
| 8   | USB2.0            | Side     |
| 9   | USB3.0            |          |
| 10  | HDMI 2 IN         |          |

### Model


DS-D5050UC



## Specifications

|                                  |  |                                  |
|----------------------------------|--|----------------------------------|
| <b>Model</b>                     | DS-D5050UC   |                                  |
| <b>Backlight</b>                 | LED Backlight  |                                  |
| <b>Screen Size</b>               | 49.5"  |                                  |
| <b>Pixel Pitch</b>               | 0.2853 mm × 0.2853 mm  |                                  |
| <b>Max Resolution</b>            | 3840 × 2160@60Hz   |                                  |
| <b>Brightness</b>                | 300 cd/m <sup>2</sup>  |                                  |
| <b>Contrast</b>                  | 4000 : 1   |                                  |
| <b>Response Time</b>             | 8 ms   |                                  |
| <b>Color</b>                     | 10.07B(8bit + FRC)   |                                  |
| <b>Active Area</b>               | 1095.84 mm × 616.41 mm   |                                  |
| <b>Viewing Angle</b>             | Horizontal 178°, Vertical 178°                                       |                                  |
| <b>Interfaces</b>                | LAN  | 1                                |
|                                  | VGA input  | 1                                |
|                                  | HDMI input   | 2                                |
|                                  | AV input   | 1 (CVBS IN, Audio R/L RCA input) |
|                                  | USB 2.0  | 1                                |
|                                  | USB 3.0  | 1                                |
|                                  | SPDIF output   | 1                                |
| <b>Power Supply</b>              | 100 to 240 VAC, 50/60Hz  |                                  |
| <b>Power Consumption</b>         | ≤ 117 W  |                                  |
| <b>Standby Power Consumption</b> | < 0.5 W  |                                  |
| <b>Loudspeaker</b>               | 2 * 8W   |                                  |
| <b>Working Temperature</b>       | 0 °C ~ 40 °C(32°F ~ 104°F)   |                                  |
| <b>Working Humidity</b>          | 10 to 90 %   |                                  |
| <b>Storage Temperature</b>       | -20°C ~ 60°C(-4°F ~ 140°F)   |                                  |
| <b>Storage Humidity</b>          | 5%~95% (No Condensation)   |                                  |
| <b>Color of Casing</b>           | Black  |                                  |
| <b>VESA</b>                      | 4-M6 400 mm * 200 mm   |                                  |
| <b>Dimensions(W*H*D)</b>         | 1123.6 mm × 649.3 mm × 77 mm   |                                  |
| <b>Packing Dimensions(W*H*D)</b> | 1280 mm × 845 mm × 203 mm  |                                  |
| <b>Gross Weight</b>              | 12.35 kg   |                                  |
| <b>Net Weight</b>                | 12.00 kg   |                                  |
| <b>Accessories</b>               | HDMI cable   | 1                                |
|                                  | Power cord   | 1                                |
|                                  | User manual  | 1                                |
|                                  | Warranty card  | 1                                |
|                                  | Remote control   | 1                                |
| <b>Bracket</b>                   | Pedestal   | Not support                      |
|                                  | Wall mounted   | Optional DS-DM4255W              |
| <b>*Note</b>                     | All specifications mentioned above are subject to the actual product |                                  |

## Dimensions (unit: mm)

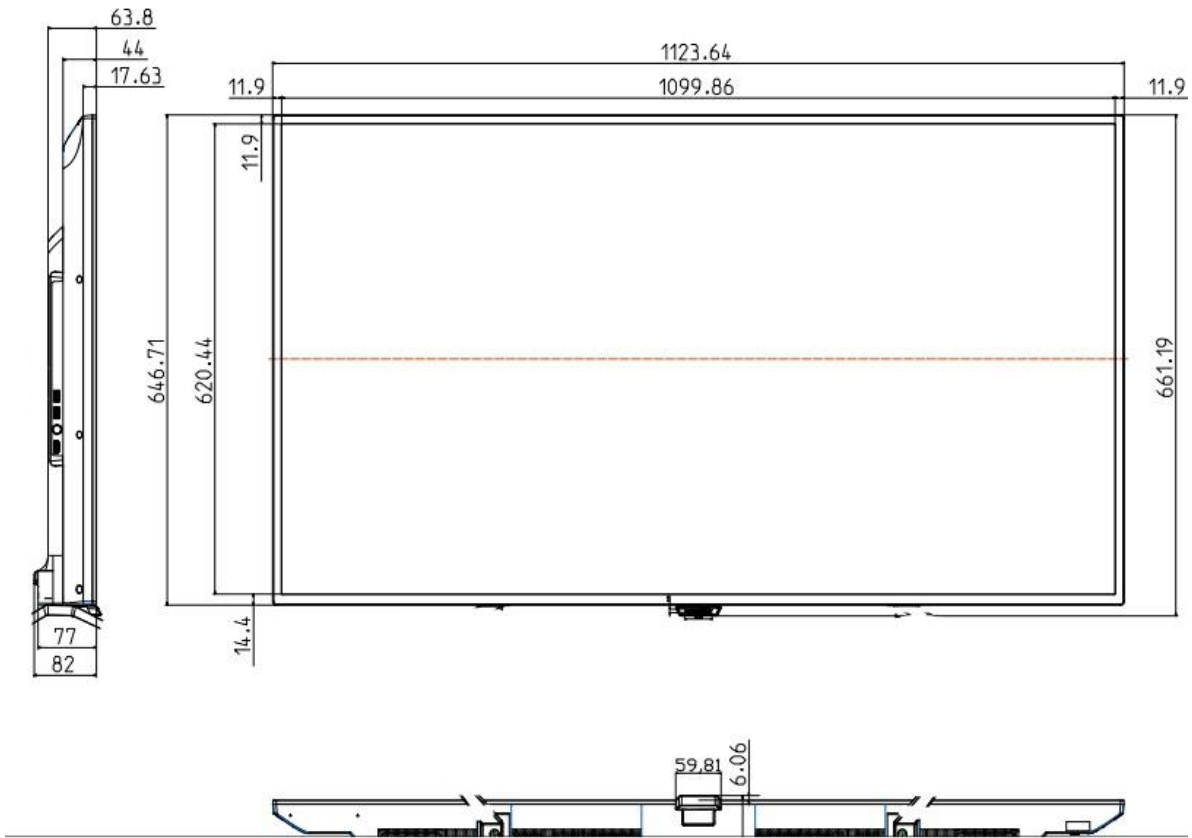


Distributed by



**HIKVISION®**

**Headquarters**  
 No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
[overseasbusiness@hikvision.com](mailto:overseasbusiness@hikvision.com)

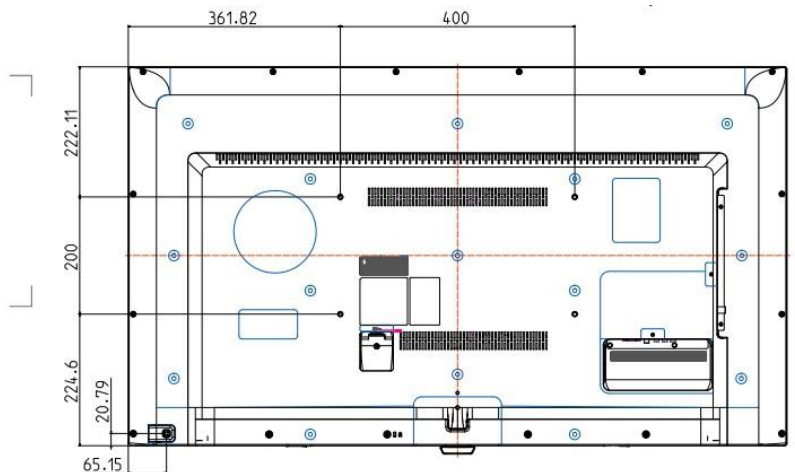

**Hikvision USA**  
 T +1-909-895-0400  
[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)

**Hikvision Europe**  
 T +31-23-55-42-770  
[info.eu@hikvision.com](mailto:info.eu@hikvision.com)

**Hikvision Middle East**  
 T +971-4-8816086  
[salesme@hikvision.com](mailto:salesme@hikvision.com)

**Hikvision Russia**  
 T +7-495-669-67-99  
[saleru@hikvision.com](mailto:saleru@hikvision.com)

**Hikvision India**  
 T +91-22-28469900  
[sales@pramahikvision.com](mailto:sales@pramahikvision.com)

**Hikvision Italy**  
 T +39-0438-6902  
[info.it@hikvision.com](mailto:info.it@hikvision.com)

**Hikvision France**  
 T +33(0)1-85-330-450  
[info.fr@hikvision.com](mailto:info.fr@hikvision.com)

**Hikvision Spain**  
 T +34-91-737-16-55  
[info.es@hikvision.com](mailto:info.es@hikvision.com)

**Hikvision Poland**  
 T +48-22-460-01-50  
[poland@hikvision.com](mailto:poland@hikvision.com)

**Hikvision UK**  
 T +01628-902140  
[support.uk@hikvision.com](mailto:support.uk@hikvision.com)

**Hikvision Singapore**  
 T +65-6684-4718  
[sg@hikvision.com](mailto:sg@hikvision.com)

**Hikvision Oceania**  
 T +61-2-8599-4233  
[salesau@hikvision.com](mailto:salesau@hikvision.com)

**Hikvision Canada**  
 T +1-909-895-0400  
[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)

**Hikvision Korea**  
 T +82-31-731-8841  
[sales.korea@hikvision.com](mailto:sales.korea@hikvision.com)

**Hikvision Brazil**  
 T +55 11 3318-0050  
[Latam.support@hikvision.com](mailto:Latam.support@hikvision.com)

**Hikvision Africa**  
 T +27 (10) 0351172  
[sale.africa@hikvision.com](mailto:sale.africa@hikvision.com)

**Hikvision Hong Kong**  
 T +852-2151-1761