


## DS-3T0306P Switch

### Features and Functions

- High performance industrial PoE switch.
- DS-3T0306P supports IEEE 802.3AF/AT standard.
- POE port maximum output power 30W (input voltage is greater than 50V).
- Design of redundant dual power input.
- Working environment temperature of no fan -40°C to +75°C.
- The average failure time reached 400 thousand hours.
- IEEE802.3x full duplex, backpressure flow control




### Outdoor scenarios

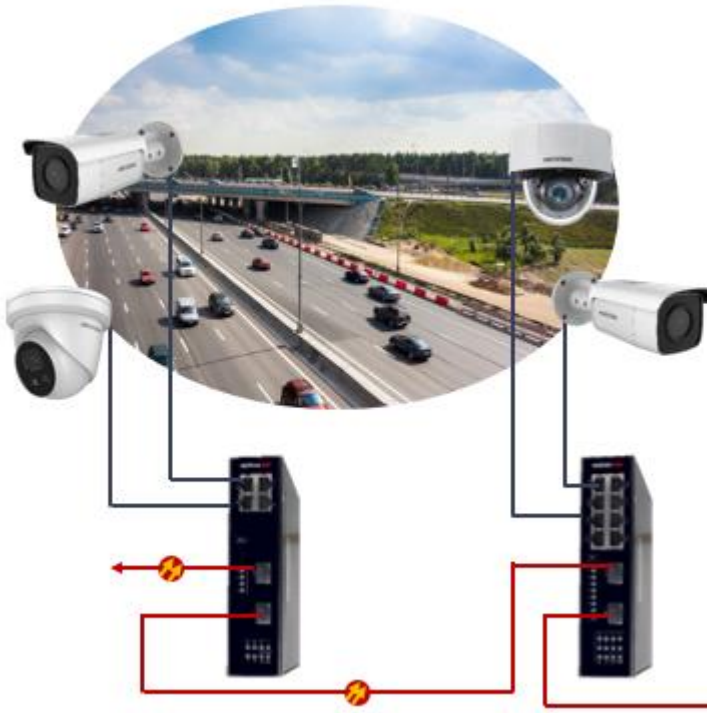

— Network cable  
— Optical fiber

### Surveillance Center

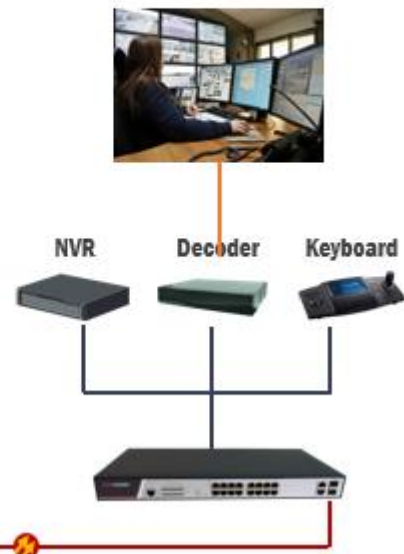

## Specifications

Item	DS-3T0306P
Backplane	8.8Gbps
Forwarding rate	3.6Mpps
MAC	4K
Ports	4 100M Base-T ports+2 1000Base-X ports
Dimensions(WxDxH)(mm)	155x130x42
Consumption	<9W
POE/POE+	Support 802.3at/af
PoE Power	Max. 30 W for one port
Install method	DIN rail
Power supply	DC : 44 ~ 57VDC ( Power supply unit is not included )
Environment	Operating temperature/humidity: -40°C-75°C , 5%-95% non-condensing Storage temperature/humidity: -40°C-85°C ; 5%-95% non-condensing
Protection Grade	IP40
EMI	FCC 47 CFR Part 15 Class A EN55022 Class A
EMS	IEC (EN )61000-4-2, Class 4 IEC (EN )61000-4-4, Class 2 IEC (EN )61000-4-5, Class 2 IEC (EN )61000-4-11, Class 4 IEC (EN )61000-4-12, Class 4


## Optional Accessory

SFP Module	Fiber type	Connector	Date Rate	Wavelength	Distance
HK-SFP-1.25G-20-1310	Single fiber, Single-mode	LC	1250 Mbps	Tx1310nm/Rx1550nm	0 to 20 km
HK-SFP-1.25G-20-1550	Single fiber, Single-mode	LC	1250 Mbps	Tx1550nm/Rx1310nm	0 to 20 km
HK-SFP-1.25G-1310-DF-MM	Duplex fiber, Multi-mode	LC	1250 Mbps	Tx1310nm/Rx1310nm	0 to 1 km
HK-SFP-1.25G-20-1310-DF	Duplex fiber, Single-mode	LC	1250 Mbps	Tx1310nm/Rx1310nm	0 to 20 km

Power Supply Unit	DC Voltage	Current	Power Budget
ELG-150-48A	48V	3.13A	150W

## Physical Interfaces

### Front Panel

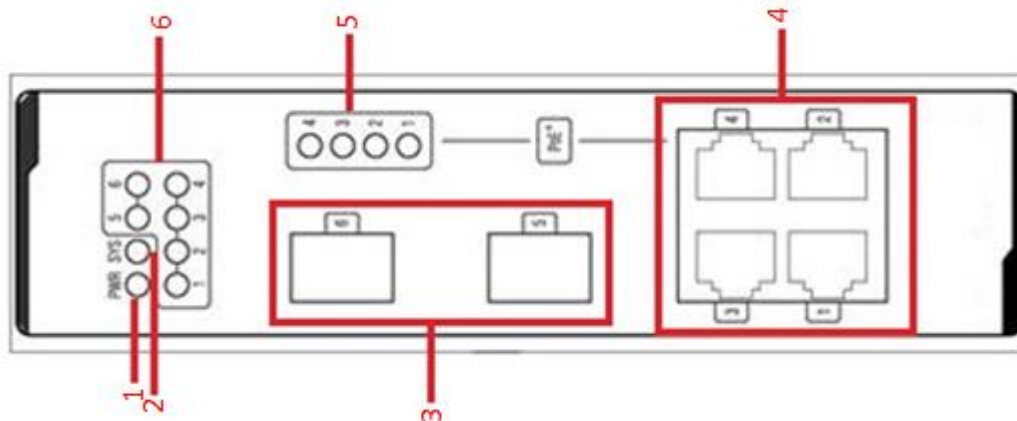

No.	Abbrev.	Name	Remarks
1	PWR	power indicator	If the switch is powered on, the indicator is on.
2	SYS	System indicator	If the indicator is always on, the system works normally.
3	/	2 SFP ports	Realizes the forward of gigabit Ethernet optical signals.
4	/	4 RJ45 ports	Realizes the PoE function and forwards 10/100M Ethernet electrical signals
5	PoE	PoE indicator corresponding to each port	If the indicator is always on, the PoE works normally. If the indicator is off, the PoE does not work.
6	Lnk/Act	Lnk/Act indicator corresponding to each port	Indicator lamp, indicating detection The indicator light is always bright, indicating LINK, The indicator light is always bright, indicating LINK, indicating lights flashing, indicating data transceiver.

Distributed by

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com